### 2x1 HDMI cable KVM Switch

#### #HKS0201C10

This 2x1 HDMI Cable KVM Switch provides you with great flexibility in integrating cross-platform computer equipment easily. It makes you available to switch easily and reliably between two HDMI computers using one HDMI compliant display.

This 2x1 HDMI Cable KVM Switch with two HDMI cable connected to HDMI input port. It makes you available to connect HDMI sources directly. Support USB 2.0 hub and USB 2.0 keyboard/mouse, by using USB port on the KVM, you can connect USB drive, printer, barcode scanner or other USB devices to the KVM. The switch can be control by keyboard hot keys and front panel input selection button.

#### Features:

- Using only 1 set of keyboard, mouse and monitor to control 2 host devices
- Support auto switching to monitor devices in a specified time interval
- Support keyboard hot keys and front panel key to control KVM switch
- Support resolution up to 4K@30Hz
- Support USB 2.0 port for printer, barcode scanner, USB drive etc.
- Support Unix/Windows/Debian/Ubuntu/Fedora /Mac OS X/Raspbian/Ubuntu for Raspberry Pi and other Linux based system
- Support hot plug, connect or disconnect devices to the KVM switch at any time without turning off devices

1


Built-in HDMI and USB cable, it available to connect HDMI sources directly

#### Packing List:

1 \* 2x1 HDMI Cable KVM Switch


1 \* User manual

## **Panel Description:**

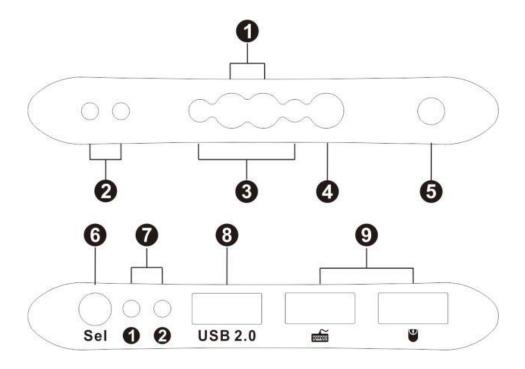

ID	Name	Description
1	HDMI input cable connection	Connect to HDMI sources devices
2	USB connection status	The corresponding LED will be lit if the USB data cable is well connected to the computer and the computer is on.
3	USB data cable connection	Connect to computer's USB port
4	HDMI output cable connection	Connect to HDMI display
5	DC 5V	DC 5V power supply
6	Input select button	Selecting HDMI input
7	Input selection status	Indicate current active selected input source
8	Standard USB 2.0 port	Connect to USB 2.0 devices, printers, USB drives
9	Keyboard and mouse input	Connect to keyboard and mouse

### **Connection Diagram**

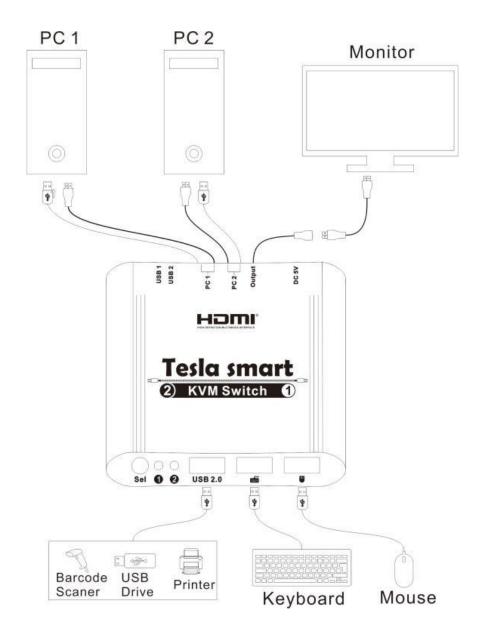

# Specification:

HKS0201C10	2x1 HDMI Cable KVM Switch			
Functionality:				
Auto Scan	Yes			
	Front panel buttons	Yes		
	Keyboard hotkeys	Yes		
Port selection	IR remote control	No		
	Mouse gesture	No		
	Console commands	No		
Technical:				
Resolution	Up to 3840x2160@30Hz			
Data rate	10.2 Gbps			
OSD	No			
	Unix/Windows/Debian /Ubuntu /Fedora /Mac OS X/			
Supported OS	Raspbian /Ubuntu for Raspberry Pi and other Linux			
	based system			
	Keyboard emulation	1 * USB Type A		
Console ports	Mouse emulation	1 * USB Type A		
Corisole ports	USB 2.0 Hub ports	1* USB Type A		
	Video /Audio	1 * HDMI Type A		
Cable version	2*HDMI (24/26 AWG), 2*USB Type A			
ESD protection	Human body model - ±8kV (Air-gap discharge)			
Mechanical:				
Chasing material	Aluminum Alloy			
Product Dimensions	91 (L) x 75 (W) x 13 (H) mm			
Cable length	1M			
Item Weight	500g			