### 1x2 HDMI Splitter

#### # HSP0102A2U

This 1x2 HDMI splitter routes can distributes one Ultra HD HDMI source to two Ultra HD displays simultaneously. Support resolution up to 4K@60Hz. Compliant with HDCP 2.2.Support up to 36 bit/pixel deep color.

With smart EDID management, make it compatible with most of the HDMI displays and sources. Support pass through LPCM 7.1, Dolby®TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™.

### Application:

The HDMI splitter(HSP0102A2U) is apply to TV stores, exhibition hall, bars, KTV clubs, schools, hospitals, hotel lobbies, retail establishments and any other installations where Ultra HD AV content from an HDMI source needs to be displayed simultaneously on up to two Ultra HD displays.

#### Features:

- Distribute 1 Ultra HD A/V source to 2 Ultra HD displays
- Support the resolution up to Ultra HD 4K 60Hz 4:4:4
- Support up to 36 bit/pixel Deep Color
- Support 7 EDID modes
- All ports support CEC function (The connected HDMI devices also should support CEC)


1

HDCP2.2 compliant

#### **Packing List:**

- 1 \* 1x2 HDMI Splitter
- 1 \* DC 5V 2A Power adapter
- 1 \* Quick-Start Guide

## Panel Description:

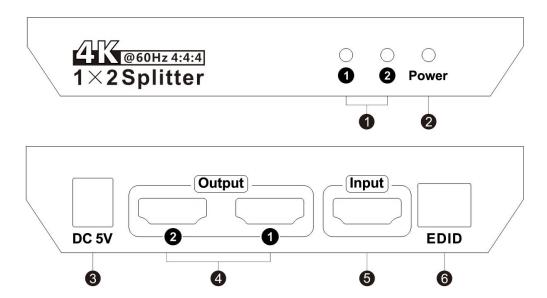


ID	Name	Description		
1	Output selection	LEDs will be lit if HDMI displays are		
	status	connected to splitter		
2	Power status	LED indicator of power supply		
3	DC 5V input	DC 5V power supply		
4	HDMI output	Connect to HDMI display		
	ports			
5	HDMI input port	Connect to HDMI source devices		
6	EDID mode	Select EDID mode		
	switch	Select EDID IIIode		

2



# **Connection Diagram:**

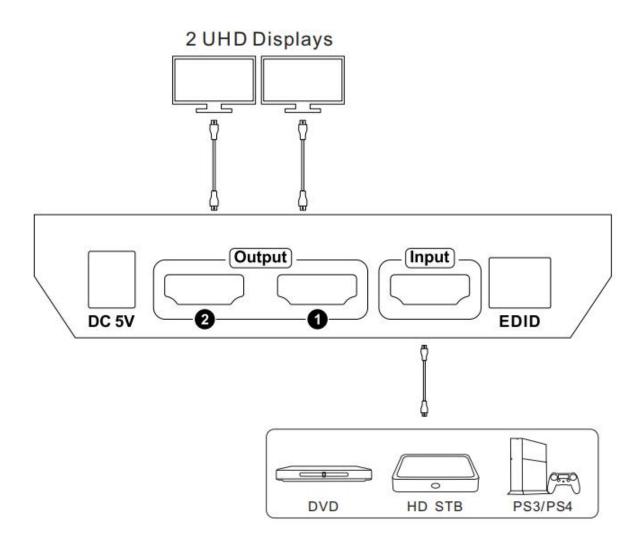

3



# Specification:

HSP0102A2U	1x2 HDMI Splitter			
Functionality:				
Smart EDID	Yes			
Technical:				
Max. Resolution	3840*2160@60Hz			
HDCP version	2.2			
Data rate	18 Gbps			
Input	1* HDMI Type A			
Output	2* HDMI Type A			
ESD protection	Human body model - ±8kV (Air-gap discharge)			
Mechanical				
Chasing material	Aluminum Alloy			
Power supply	DC 5V			
Operating/storage temperature	0 to 70 degree/-40 to 85 degree			
Operating humidity		10 to 90% RH		
Product	Dimension	122(L) x 54 (W) x 24 (H) mm		
	Weight	112g		
Item	Dimension	157 (L) x 90 (W) x 76 (H) mm		
	Weight	291g		
Carton	Dimension	490 (L) x 360 (W) x 360 (H) mm		
Carton	Quantity	45pcs		
	Total Weight	13.945kg		