

JAB LLT series



Features & Benefits

- IP 67/IP68 waterproof
- Rated current: 5A/10A/35A
- Rated voltage: 300V/500V
- Multi pole
- Screw termination
- Plastic housing

JAB LLT-M10 Series

M10 SERIES

M10 系列


1. Smaller Size LLT M10 Waterproof Connector
2. Gold Plated Pins, Molded with Cable and Ip65 Protection Level for Raining Environment
3. Quick Lock Type Bringing Convenient Handling to Connection
4. Rating Current 3A, and Max Cable Diameter: 5mm



1. M10 公母对接注塑无网尾快接式PVC材质01款




1. 料号(P/N): LLT-M10-0302GMZBKV01
2. 注塑材质 (Material): PVC
3. 最大线径 (Max Cable OD): 5.0mm
4. 防水等级 (Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor Copper with Gold Plated

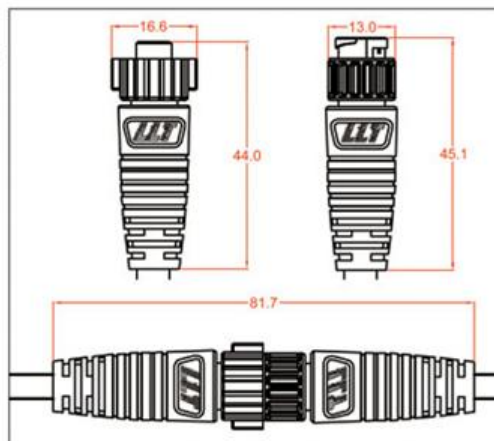

2. M10 公母对接前装面板注塑无网尾快接式PVC材质01款



1. 料号(P/N): LLT-M10-0302GMYBKV01
2. 注塑材质 (Material): PVC
3. 最大线径 (Max Cable OD): 5.0mm
4. 防水等级 (Waterproof Level): IP65
5. 面板最大厚度 (Panel Max. Thickness): 8mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor Copper with Gold Plated

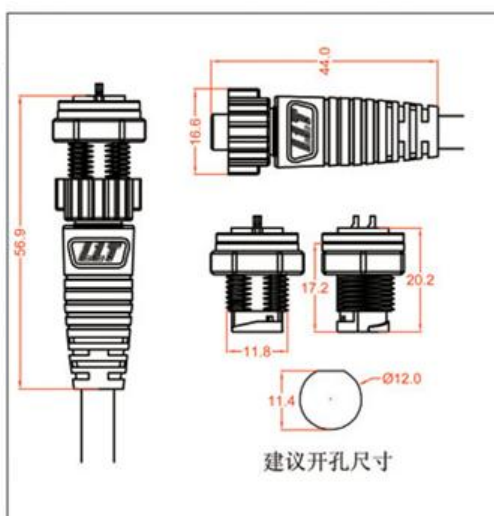


JAB LLT-M10 Series


3. M10 公母对接前装面板注塑无网尾快接式PVC材质02款



- 1. 料号(P/N):
LLT-M10-0302GMYBKV01
- 2. 注塑材质
(Material):PVC
- 3. 最大线径
(Max Cable OD) : 5.0mm
- 4. 防水等级
(Waterproof Level): IP65
- 5. 面板最大厚度
(Panel Max. Thickness): 8mm
- 6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

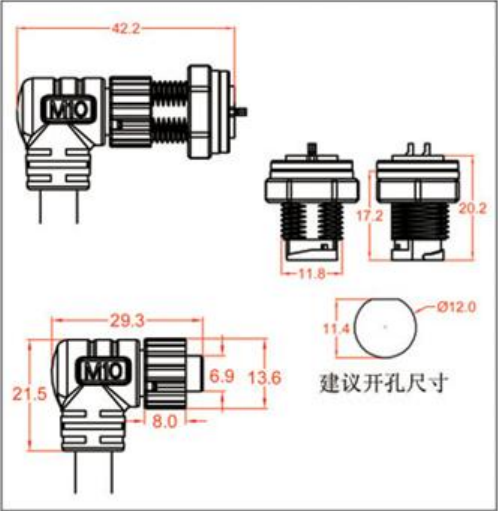

五金排列

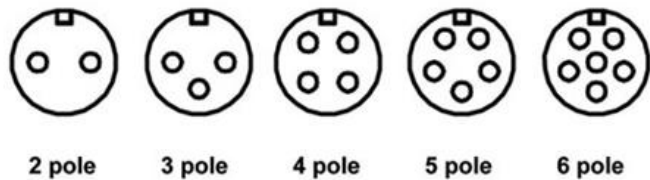

电性参数

芯数 (Pin Number)	2	3	4	5	6
额定电流 (Current Rating)	3A	3A	3A	3A	3A
额定电压 (Voltage Rating)	200V	200V	200V	200V	200V
耐压 (Withstand Voltage)	500V	500V	500V	300V	300V
接触电阻 Contact Resistance	3	3	3	3	3


JAB LLT-M12 Series



m12 series

- 1. Best Performance and Prices LLT M12 Waterproof Connector
- 2. Nylon Material, Gold Plated Pins and IP65 Protection Level for Raining Environment
- 3. Thread Type Bring Reliable Mating.
- 4. Rating Current: 5A, and Max Cable Diameter: 10mm

五金排列

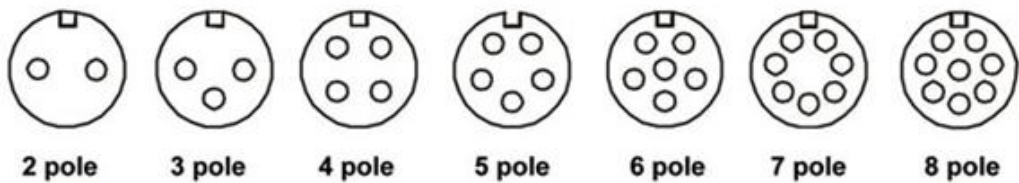

电性参数

芯数 (Pin Number)	2	3	4	5	6	7	8
额定电流 (Current Rating)	5A	5A	5A	5A	5A	5A	5A
额定电压 (Voltage Rating)	500V	500V	500V	400V	400V	300V	300V
耐压 (Withstand Voltage)	1500V	1500V	1500V	1000V	1000V	800V	800V
接触电阻 Contact Resistance	5	5	5	5	5	5	5


JAB LLT-M12 Series



1. M12 公母对接式注塑网尾螺纹式PVC/尼龙材质01款




1. 料号(P/N):
LLT-M12-0502GMZWLV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 10.0mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

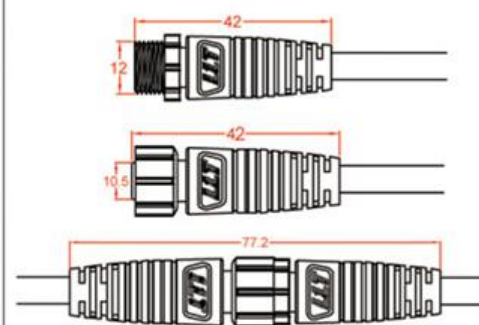

2. M12 公母对接式注塑网尾螺纹式PVC/尼龙材质01款



1. 料号(P/N):
LLT-M12-0502GMZWLV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 10.0mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

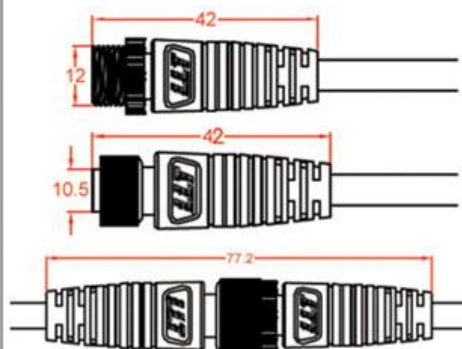


JAB LLT-M12 Series

3. M12 公母对接式注塑网尾螺纹式PVC/尼龙材质02款




1. 料号(P/N):
LLT-M12-0502GMZWLV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 10.0mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

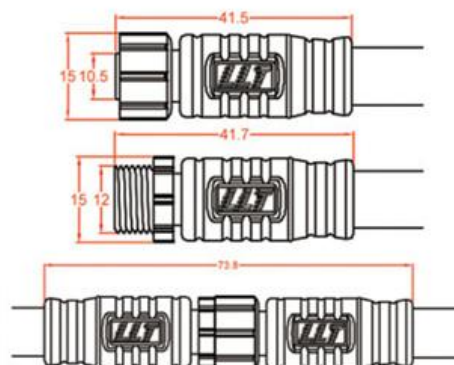

4. M12 公母对接式注塑网尾螺纹式PVC/尼龙材质02款




1. 料号(P/N):
LLT-M12-0502GMZWLV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 10.0mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

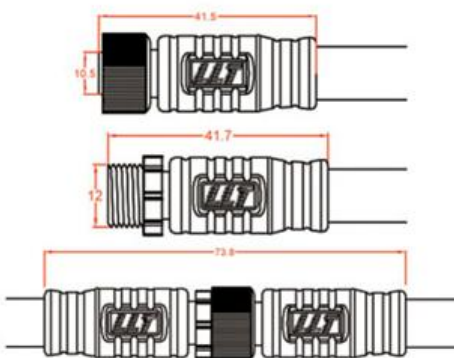

5. M12 前装面板注塑无网尾螺纹式PVC/尼龙材质01款



1. 料号(P/N):
LLT-M12-0502GMZWLV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 10.0mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

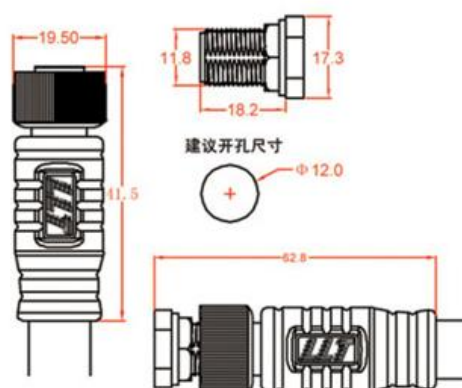


JAB LLT-M12 Series

6. M12 后装面板注塑无网尾螺纹式PVC/尼龙材质02款




1. 料号(P/N):
LLT-M12-0502GMZWLV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 10.0mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

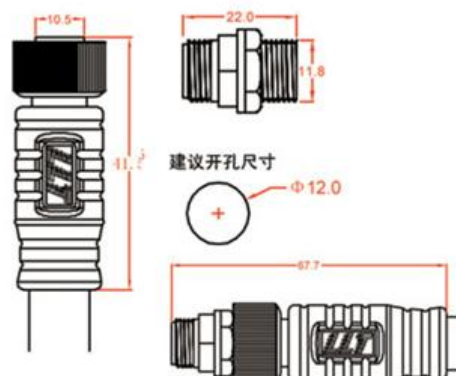

7. M12 公母对接组装螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M12-0503GMZZLA01
2. 注塑材质
(Material): 尼龙(Nylon)
3. 最大线径
(Max Cable OD): 6.0mm
4. 防水等级
(Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

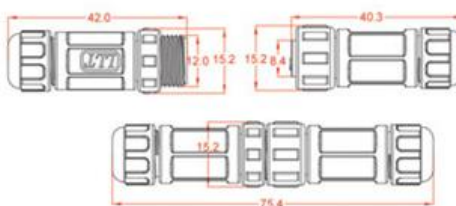

8. M12 公母对接公针前装面板螺纹式尼龙材质02款



1. 料号(P/N):
LLT-M12-0502GMYPLA02
2. 注塑材质
(Material): 尼龙(Nylon)
3. 最大线径
(Max Cable OD): 6.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness): 3mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

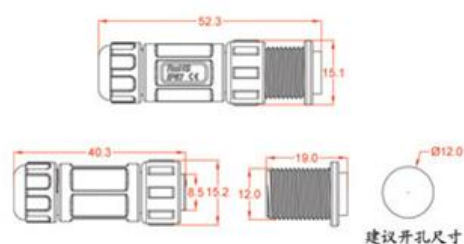


JAB LLT-M12 Series

9. M12 公母对接公针后装面板螺纹式尼龙材质02款



1. 料号(P/N):
LLT-M12-0502GMYRLA02
2. 注塑材质
(Material): 尼龙(Nylon)
3. 最大线径
(Max Cable OD): 6.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness): 3mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

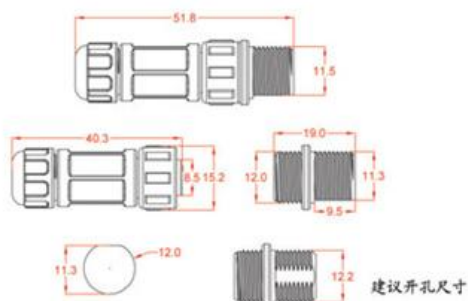

JAB LLT-M14 Series




M14 SERIES

1. High Quality LLT M14 Waterproof Connector
2. Nylon Material, Gold Plated Pins, Field Assembled and IP65/IP68 Protection Level
3. Thread Type Bring Reliable Mating.
4. Rating Current: 15A, and Max Cable Diameter: 8.0mm

1. M14 公母对接注塑网尾螺纹式PVC材质01款



1. 料号(P/N):
LLT-M14-1502GMZWLV01
2. 注塑材质
(Material): PVC
3. 最大线径
(Max Cable OD): 8.9mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

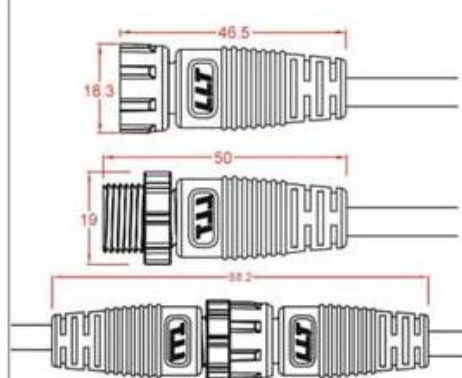


JAB LLT-M14 Series

2. M14 公母对接组装螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M14-1502GMZZLA01
2. 外壳材质
(Material): 尼龙
3. 最大线径
(Max Cable OD): 8.0mm
4. 防水等级
(Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

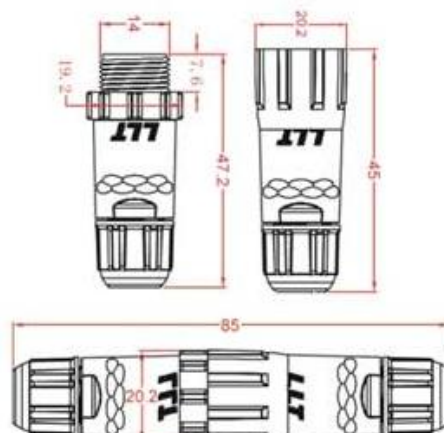

3. M14 公母对接前装面板螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M14-1502GMYPLA01
2. 外壳材质
(Material): 尼龙
3. 最大线径
(Max Cable OD): 8.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness):
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

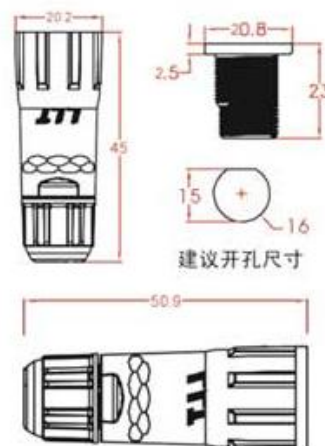

4. M14 公母对接后装面板式组装型螺纹式尼龙材质01款



1. 料号(P/N):
LLT-M14-1502GMYPLA01
2. 外壳材质
(Material): 尼龙
3. 最大线径
(Max Cable OD): 8.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness):
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

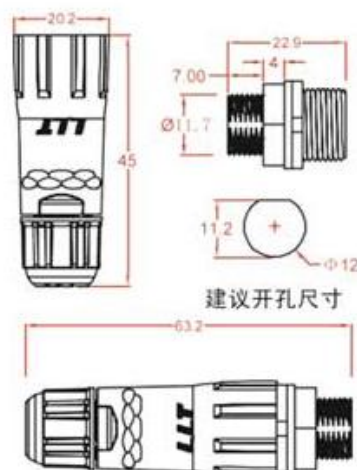


JAB LLT-M14 Series


5. M14 公母对接后装面板注塑网尾螺纹式PVC材质02款



- 1. 料号(P/N):
LLT-M14-1502GMYRLA02
- 2. 注塑材质
(Material): PVC
- 3. 最大线径
(Max Cable OD): 9.0mm
- 4. 防水等级
(Waterproof Level): IP65
- 5. 面板最大厚度
(Panel Max. Thickness):
- 6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

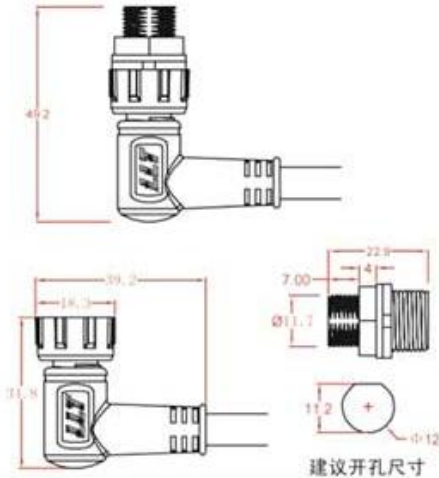

五金排列

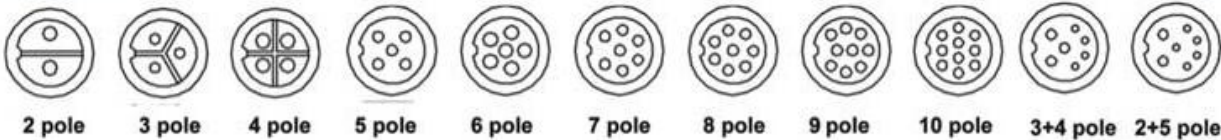

电性参数

芯数 (Pin Numbers)	2	3	4	5	6	7	8	9	10	3+4	2+5
额定电流 (Current Rating)(A)	15A	15A	15A	5A	5A	5A	5A	5A	5A	3x15A+4x5A	2x15A+5x5A
额定电压 (Voltage Rating)(V)	500V	500V	500V	500V	500V	400V	400V	300V	300V	300V	300V
耐压 (Withstand Voltage)	1500V	1500V	1500V	1000V	1500V	1000V	1000V	800V	800V	800V	800V
接触电阻(mhom) Contact Resistance	2	2	2	5	5	5	5	5	5	2	5

JAB LLT-M16 Series



M16 SERIES

1. Excellent Quality and Reasonable Prices LLT M16 Waterproof Connector
2. Nylon Material, Gold Plated Pins, Molded with Cable and IP65/IP67 Protection Level
3. Thread Type and Quick lock Type for Your Choice
4. Rating Current: 15A for 2 pins, 3 pins and 4 pins, Rating Current : 5A for 5 pins and 6 pins;
Max Cable Diameter: 8.0mm




JAB LLT-M16 Series

1. M16 公母对接注塑网尾螺纹式PVC/尼龙材质01款




1. 料号(P/N):
LLT-M16-1502GMZWL01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 8.0mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

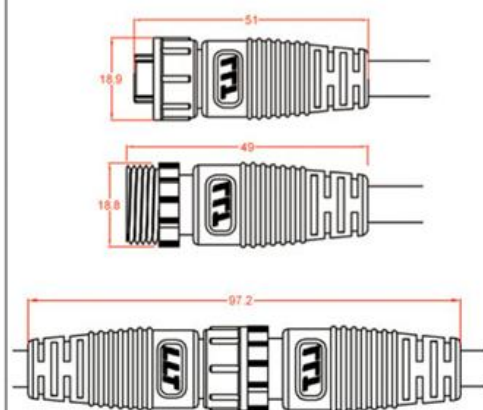

2. M16 公母对接注塑网尾快接式PVC/尼龙材质01款




1. 料号(P/N):
LLT-M16-1502GMZLL01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 7.2mm
4. 防水等级
(Waterproof Level): IP67
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

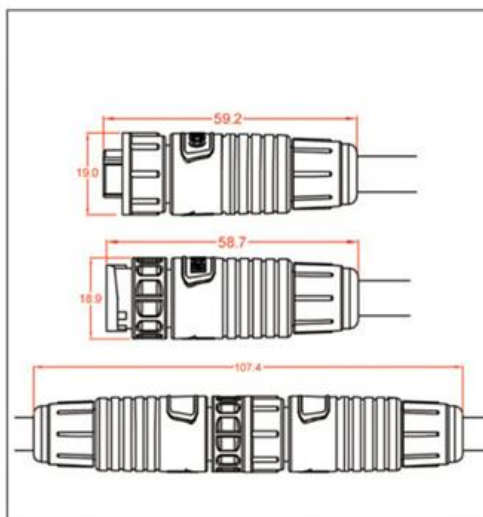

3. M16 公母对接组装型螺纹式尼龙材质01款



1. 料号(P/N):
LLT-M16-1503GMZZLA01
2. 注塑材质
(Material): 尼龙(Nylon)
3. 最大线径
(Max Cable OD): 9.0mm
4. 防水等级
(Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

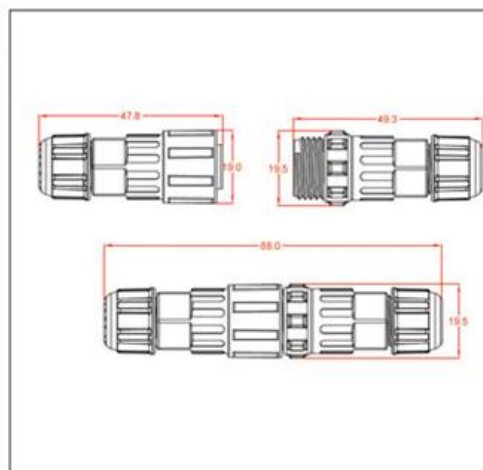


JAB LLT-M16 Series

4. M16 公母对接公针前装面板组装螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M12-1503GMYPLA01
2. 注塑材质
(Material):尼龙(Nylon)
3. 最大线径
(Max Cable OD): 9.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness): 3mm
- 6.接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

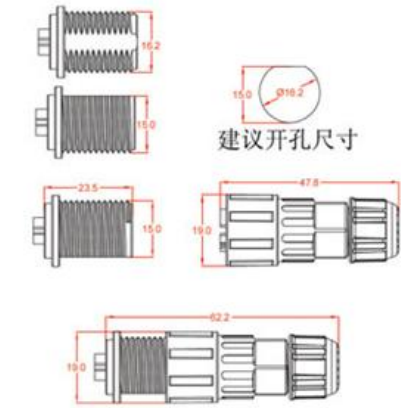

5. M16 公母对接公针后装面板组装螺纹式尼龙材质01款



1. 料号(P/N):
LLT-M12-0503GMYRLA01
2. 注塑材质
(Material):尼龙(Nylon)
3. 最大线径
(Max Cable OD): 9.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness): 3mm
- 6.接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

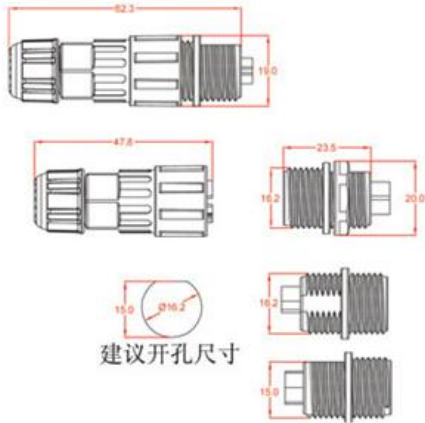


2 pole



3 pole



4 pole




5 pole



6 pole



7 pole



8 pole

电性参数

芯数 (Pin Numbers)	2	3	4	5	6	7	8
额定电流 (Current Rating)(A)	15A	15A	15A	5A	5A	5A	5A
额定电压 (Voltage Rating)(V)	500V	500V	500V	500V	500V	400V	400V
耐压 (Withstand Voltage)	1500V	1500V	1500V	1000V	1500V	1000V	1000V
接触电阻(mhom) Contact Resistance	2	2	2	5	5	5	5


JAB LLT-M18 Series

M18 series

1. M18 公母对接注塑网尾螺纹式PVC/尼龙材质01款




- 1. 料号(P/N): LLT-M18-1502GMZWL01
- 2. 注塑材质 (Material): PVC/尼龙
- 3. 最大线径 (Max Cable OD): 11.0mm
- 4. 防水等级 (Waterproof Level): IP65
- 5. 接触件材质: 磷铜镀金 Contact Material: Phosphor Copper with Gold Plated

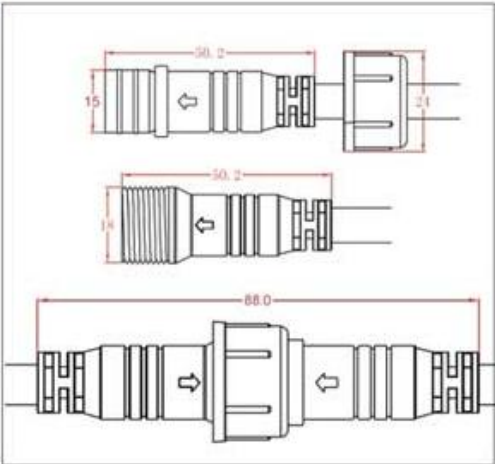

2. M18 公母对接注塑尾部螺母螺纹式PVC/尼龙材质01款



- 1. 料号(P/N): LLT-M16-1502GMZLL01
- 2. 注塑材质 (Material): PVC/尼龙
- 3. 最大线径 (Max Cable OD): 8.5mm
- 4. 防水等级 (Waterproof Level): IP67
- 5. 接触件材质: 磷铜镀金 Contact Material: Phosphor Copper with Gold Plated

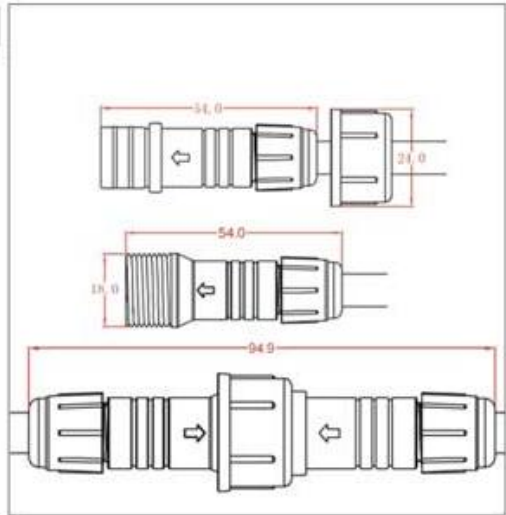

五金排列

五金排列



2 pole

3 pole

4 pole

芯数 (Pin Numbers)	2	3	4
额定电流 (Current Rating)(A)	15A	15A	15A
额定电压 (Voltage Rating)(V)	500V	500V	500V
耐压 (Withstand Voltage)	1500V	1500V	1500V
接触电阻(mhom) Contact Resistance	3	3	3


JAB LLT-M19 Series

**M19 series**

1. IP68 LLT M19 Waterproof Connector
2. Nylon Material, Gold Plated Pins, Molded with Cable, Field Assembled Waterproof connectors
3. Thread Type and Quick Lock for Choice
4. Rating Current: 20A for 2 pins, 3 pins and 4 pins, Max Cable Diameter: 11.0mm

1. M19 公母对接注塑网尾快接式PVC/尼龙材质01款

1. 料号(P/N):
LLT-M19-2002GMZWKV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 8.5mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

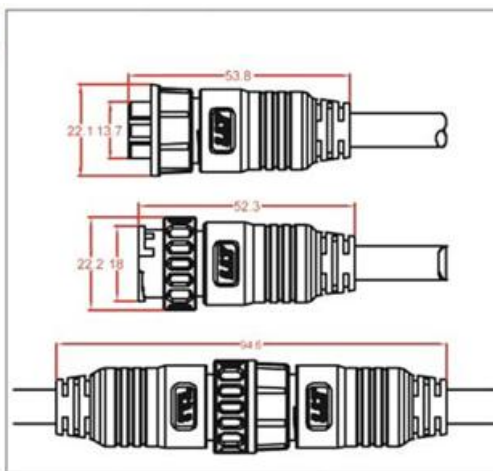


JAB LLT-M19 Series

2. M19 公母对接注塑尾部螺母快接式PVC/尼龙材质01款




1. 料号(P/N):
LLT-M19-2002GMZLKV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 8.5mm
4. 防水等级
(Waterproof Level): IP67
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

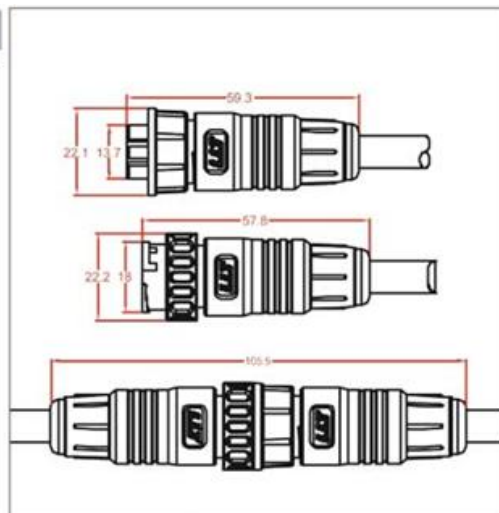

3. M19 公母对接注塑网尾螺纹式PVC/尼龙材质01款




1. 料号(P/N):
LLT-M19-2002GMZWLV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 8.5mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

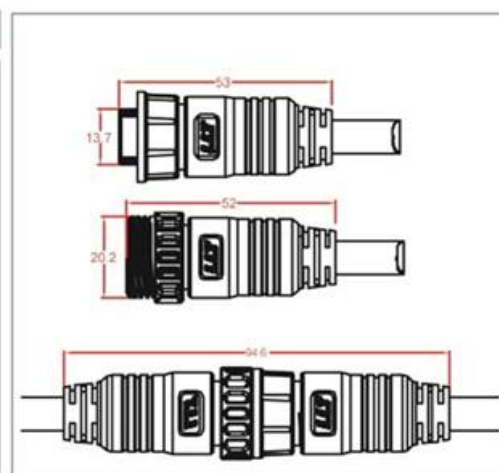

4. M19 公母对接注塑尾部螺母螺纹式PVC/尼龙材质01款



1. 料号(P/N):
LLT-M19-2002GMZWLV01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 8.5mm
4. 防水等级
(Waterproof Level): IP67
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

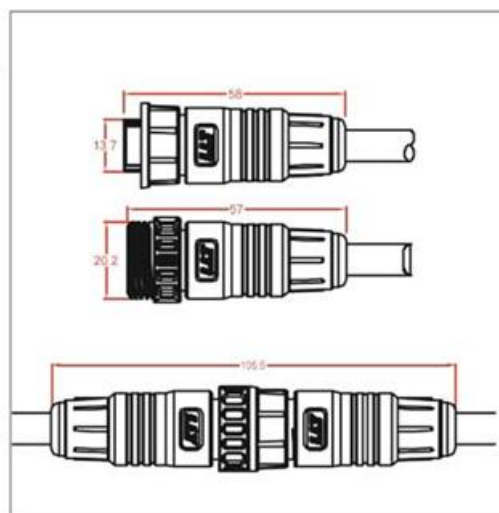


JAB LLT-M19 Series

5. M19 公母对接组装型快接式尼龙材质01款




1. 料号(P/N): LLT-M19-2002GMZZKV01
2. 注塑材质 (Material): 尼龙
3. 最大线径 (Max Cable OD): 10.5mm
4. 防水等级 (Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor Copper with Gold Plated

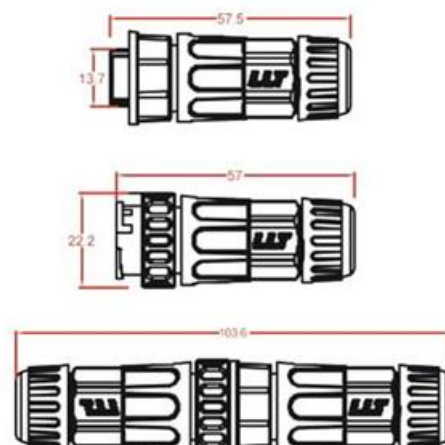

6. M19 公母对接组装型螺纹式尼龙材质01款




1. 料号(P/N): LLT-M19-2002GMZZLV01
2. 注塑材质 (Material): 尼龙
3. 最大线径 (Max Cable OD): 10.5mm
4. 防水等级 (Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor Copper with Gold Plated

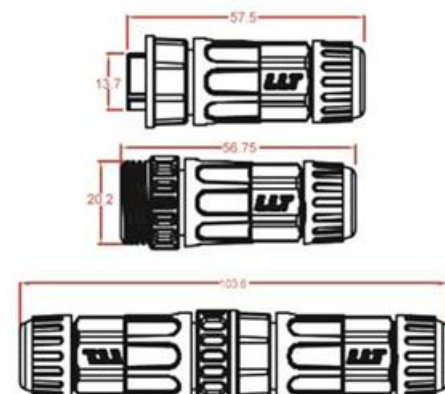

7. M19 公母对接前装公针面板组装型快接式尼龙材质01款



1. 料号(P/N): LLT-M19-2002GMZPKV01
2. 注塑材质 (Material): 尼龙
3. 最大线径 (Max Cable OD): 8.5mm
4. 防水等级 (Waterproof Level): IP68
5. 面板最大厚度 (Panel Max. Thickness):
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor Copper with Gold Plated

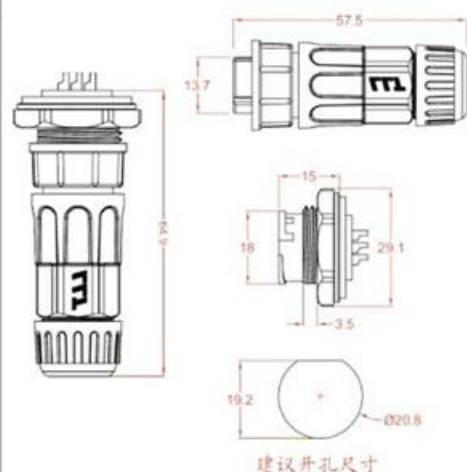


JAB LLT-M19 Series

8. M19 公母对接后装公针面板组装型螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M19-2002GMZPLV01
2. 注塑材质
(Material): 尼龙
3. 最大线径
(Max Cable OD): 10.5mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness):
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

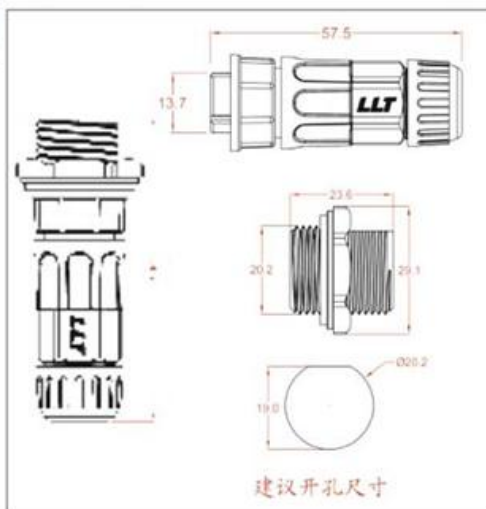

9. M19 公母对接前装母针面板组装型快接式尼龙材质01款




1. 料号(P/N):
LLT-M19-2002GMZPKV01
2. 注塑材质
(Material): 尼龙
3. 最大线径
(Max Cable OD): 10.5mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness):
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

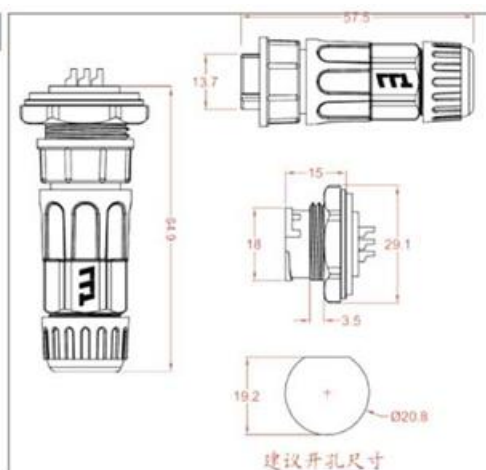

10. M19 公母对接后装母针面板组装螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M19-2002GMZPLV01
2. 注塑材质
(Material): 尼龙
3. 最大线径
(Max Cable OD): 10.5mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness):
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

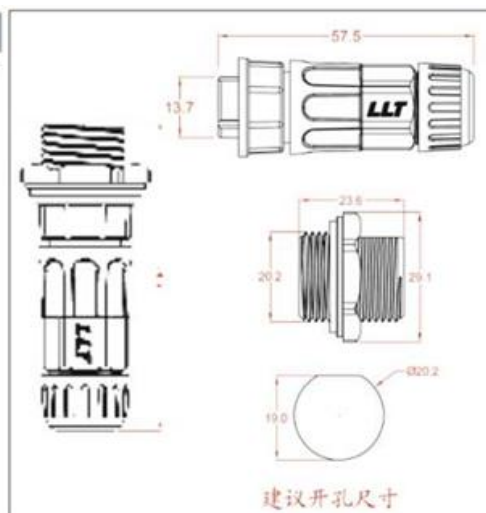

JAB LLT-M19 Series

五金排列



电性参数

芯数 (Pin Numbers)	2	3	4	5	6		7	8	9	10	12	14
额定电流 (Current Rating)(A)	20A	20A	20A	5A	5A	15A	5A	5A	5A	5A	5A	5A
额定电压 (Voltage Rating)(V)	500V	500V	500V	500V	500V	500V	400V	400V	300V	300V	300V	300V
耐压 (Withstand Voltage)	1500V	1500V	1500V	1000V	1500V	1500V	1000V	1000V	800V	800V	800V	800V
接触电阻(mhom) Contact Resistance	1	1	1	5	5	1	5	5	5	5	5	5

JAB LLT-M20 Series

M20 SERIES

1. M20 公母对接注塑网尾螺纹式PVC/尼龙材质01款




1. 料号(P/N):
LLT-M20-0502GMZWLV01

2. 注塑材质
(Material): PVC/尼龙

3. 最大线径
(Max Cable OD): 8.5mm

4. 防水等级
(Waterproof Level): IP65

5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

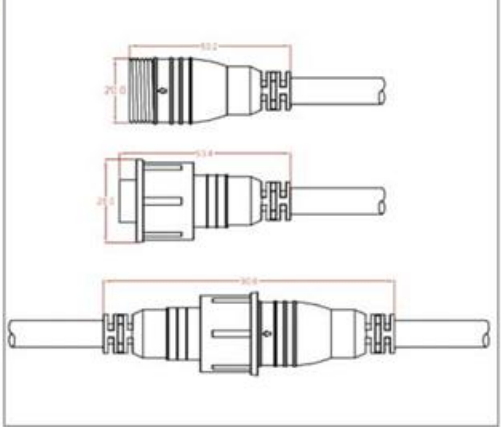

2. M20 公母对接注塑尾部螺母螺纹式PVC/尼龙材质01款




1. 料号(P/N):
LLT-M20-0502GMZLLV01

2. 注塑材质
(Material): PVC/尼龙


3. 最大线径
(Max Cable OD): 8.5mm

4. 防水等级
(Waterproof Level): IP67

5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

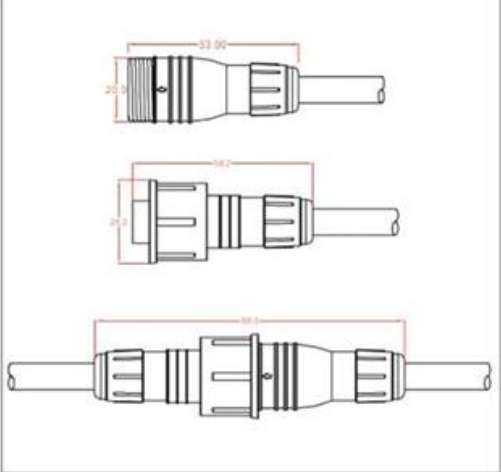

五金排列

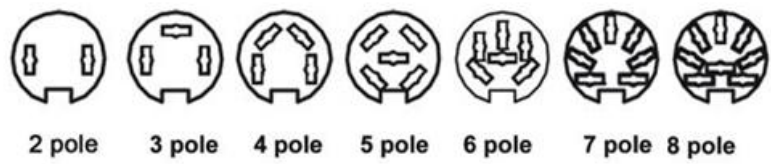

电性参数

芯数 (Pin Numbers)	3	4	5	6	7	8
额定电流 (Current Rating)(A)	5A	5A	5A	5A	5A	5A
额定电压 (Voltage Rating)(V)	50V	50V	50V	500V	50V	50V
耐压 (Withstand Voltage)	200V	200V	200V	200V	200V	200V
接触电阻(mhom) Contact Resistance	5	5	5	5	5	5


JAB LLT-M22 Series

M22 SERIES

1. Screw and Soldering Pins LLT M22 Waterproof Connector
2. Nylon Material, Gold Plated Pins, Male Female Molded with Cable, Field Assembled Waterproof Connectors
3. Thread Type and Quick Lock for IP65/IP67/IP68 Protection Level
4. Rating Current: 25A for 2 pins, 3pins, 4 pins;
Max Cable Diameter: 10.0mm

**1. M22 公母对接注塑网尾快接式PVC材质01款**

1. 料号(P/N):
LLT-M22-2502GMZWKV01
2. 注塑材质
(Material): PVC
3. 最大线径
(Max Cable OD): 12.0mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

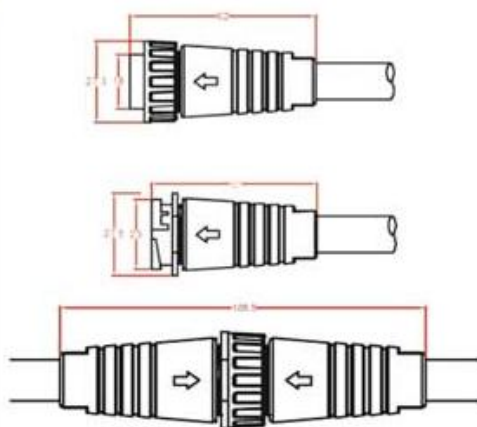


JAB LLT-M22 Series

2. M22 公母对接组装型螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M22-2502GMZZLV01
2. 注塑材质
(Material): 尼龙
3. 最大线径
(Max Cable OD): 10.0mm
4. 防水等级
(Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

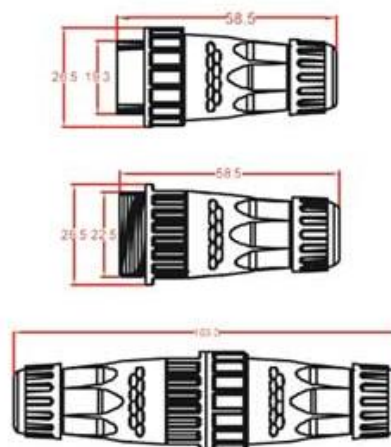

3. M22 公母对接后装公针面板快接式尼龙材质01款




1. 料号(P/N):
LLT-M22-2502GMZRKV01
2. 注塑材质
(Material): 尼龙
3. 最大线径
(Max Cable OD): 10.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness):
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

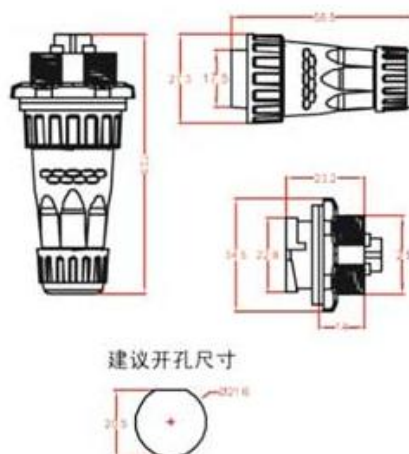

4. M22 公母对接后装母针面板快接式尼龙材质01款



1. 料号(P/N):
LLT-M22-2502GMZRKV01
2. 注塑材质
(Material): 尼龙
3. 最大线径
(Max Cable OD): 10.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness):
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

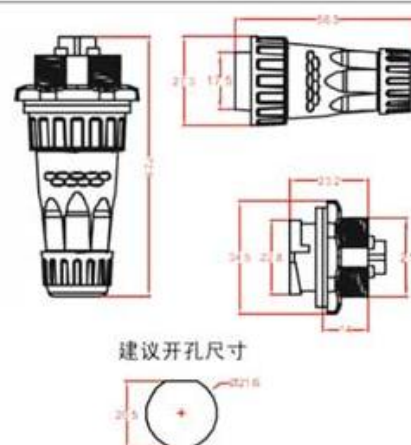

五金排列

JAB LLT-M25 Series




M25 SERIES

1. High Current LLT M25 Waterproof Connector
2. Nylon Material, Gold Plated Pins, Male Female Molded with Cable Waterproof Connectors
3. IP68 Protection Level
4. Rating Current: 35A for 2 pins, 3 pins, 4 pins; Rating Current: 20A for 5 pins and 6 pins
5. Max Cable Diameter: 13.0mm

1. M25 公母对接注塑网尾螺纹式尼龙/PVC材质01款



1. 料号(P/N):
LLT-M25-3502GMZWLA01
2. 注塑材质
(Material): PVC/尼龙
3. 最大线径
(Max Cable OD): 15.0mm
4. 防水等级
(Waterproof Level): IP65
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor Copper with Gold Plated

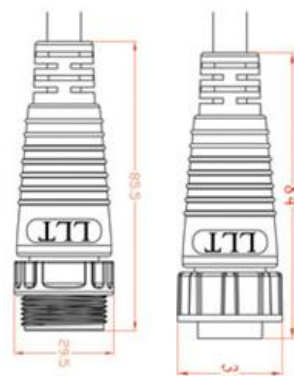


JAB LLT-M25 Series

2. M25 公母对接组装型螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M25-3502GMZZLA01
2. 注塑材质
(Material): 尼龙 (Nylon)
3. 最大线径
(Max Cable OD): 13.0mm
4. 防水等级
(Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated



3. M25 公母对接前装母针面板螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M25-3502GMYPLA01
2. 注塑材质
(Material): 尼龙 (Nylon)
3. 最大线径
(Max Cable OD): 13.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness): 10mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

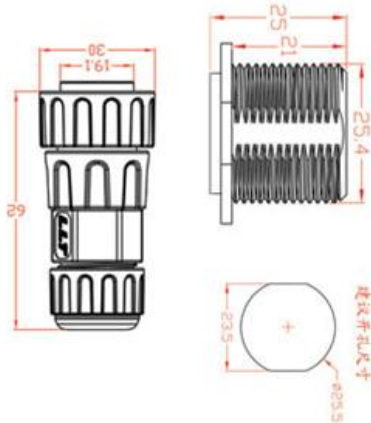

4. M25 公母对接后装母针面板螺纹式尼龙材质01款



1. 料号(P/N):
LLT-M25-3502GMYRLA01
2. 注塑材质
(Material): 尼龙 (Nylon)
3. 最大线径
(Max Cable OD): 13.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness): 10mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

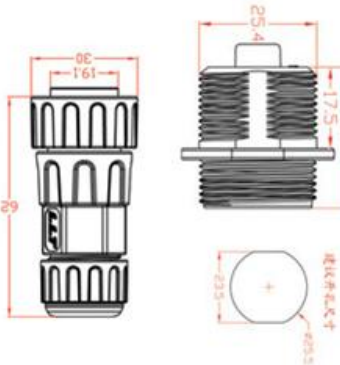


JAB LLT-M25 Series

5. M25 公母对接后装母针面板快接式尼龙材质01款




1. 料号(P/N):
LLT-M25-2006GMYRKA01
2. 注塑材质
(Material): 尼龙 (Nylon)
3. 最大线径
(Max Cable OD): 13.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness): 10mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

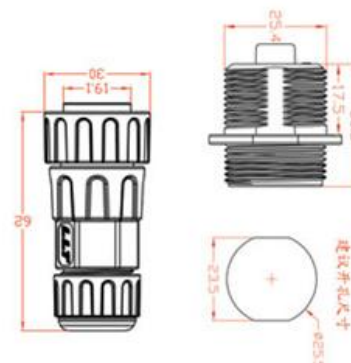

6. M25 公母对接公针前装面板螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M25-3503GMYPLA01
2. 注塑材质
(Material): 尼龙(Nylon)
3. 最大线径
(Max Cable OD): 13.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness): 10mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

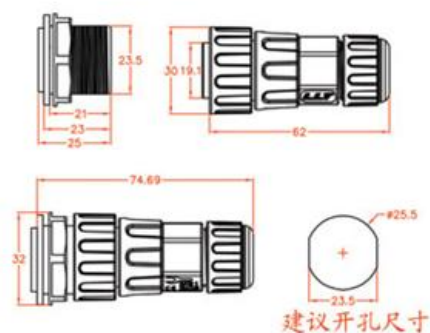

7. M25 公母对接公针后装面板螺纹式尼龙材质01款




1. 料号(P/N):
LLT-M25-3502GMYRLA01
2. 注塑材质
(Material): 尼龙(Nylon)
3. 最大线径
(Max Cable OD): 13.0mm
4. 防水等级
(Waterproof Level): IP68
5. 面板最大厚度
(Panel Max. Thickness): 10mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated

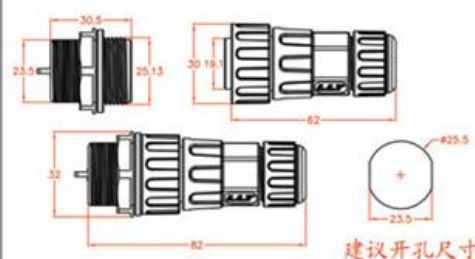

JAB LLT-M25 Series

五金排列

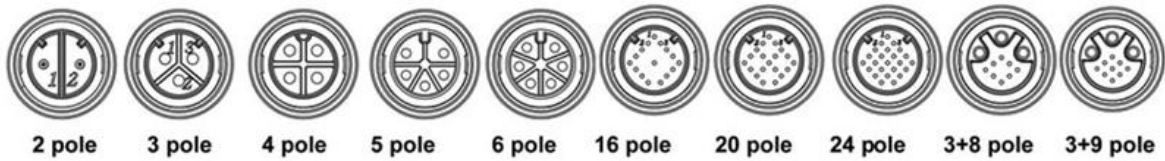

电性参数

芯数 (Pin Numbers)	2	3	4	5	6	16	20	24	3+8		3+9	
额定电流 (Current Rating)(A)	35A	35A	35A	20A	20A	5A	5A	5A	20A	5A	20A	5A
额定电压 (Voltage Rating)(V)	500V	500V	500V	500V	500V	300V	300V	300V	300V		300V	
耐压 (Withstand Voltage)	1500V	1500V	1500V	1500V	1500V	800V	800V	800V	800V		800V	
接触电阻(mhm) Contact Resistance	1	1	1	2	2	2	5	5	2	5	2	5

JAB LLT-M29 Series



m29 series


1. IP68 Screw Type LLT M29 Waterproof Connector
2. Nylon Material, Gold Plated Pins, Field Assembled Waterproof Connectors
3. Quick Lock for IP68 Protection Level
4. Rating Current: 35A for 2 pins, 3 pins, 4 pins; Max Cable Diameter: 13.0mm

JAB LLT-M29 Series

1. M29 公母对接组装型快接式尼龙材质01款




1. 料号(P/N):
LLT-M29-3504GMZZKA01
2. 注塑材质
(Material): 尼龙 (Nylon)
3. 最大线径
(Max Cable OD): 15.0mm
4. 防水等级
(Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated




1. M29 公母对接后装公针面板快接式尼龙材质01款



1. 料号(P/N):
LLT-M29-3504GMYRKA01
2. 注塑材质
(Material): 尼龙 (Nylon)
3. 最大线径
(Max Cable OD): 15.0mm
4. 防水等级
(Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor
Copper with Gold Plated



五金排列



2 pole 3 pole 4 pole 5 pole 6 pole 7 pole 12 pole 18 pole 24 pole 36 pole

电性参数

芯数 (Pin Numbers)	2	3	4	5	6	7	12	18	24	36
额定电流 (Current Rating)(A)	35A	35A	35A	20A	20A	20A	5A	5A	5A	5A
额定电压 (Voltage Rating)(V)	500V	500V	500V	500V	500V	400V	400V	300V	300V	300V
耐压 (Withstand Voltage)	1500V	1500V	1500V	1500V	1500V	1000V	1000V	800V	800V	800V
接触电阻(mhom) Contact Resistance	1	1	1	2	2	2	5	5	5	5


JAB LLT-M19-RJ45 Series

M19- RJ45 SERIES

1. RJ45 前装面板螺纹式母端尼龙材质01款



1. 料号(P/N): LLT-RJ45MMYPLA01
2. 注塑材质 (Material): 尼龙
3. 最大线径 (Max Cable OD): 7.0mm
4. 防水等级 (Waterproof Level): IP68
5. 面板最大厚度 (Panel Max. Thickness): 10mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor Copper with Gold Plated




建议开孔尺寸



2. RJ45 前装面板螺纹式母端带线尼龙材质02款



1. 料号(P/N): LLT-RJ45MMYPLA02
2. 注塑材质 (Material): 尼龙
3. 最大线径 (Max Cable OD): 7.0mm
4. 防水等级 (Waterproof Level): IP68
5. 面板最大厚度 (Panel Max. Thickness): 10mm
6. 接触件材质: 磷铜镀金
Contact Material: Phosphor Copper with Gold Plated




建议开孔尺寸




3. RJ45 前装面板螺纹式公端尼龙材质01款



1. 料号(P/N): LLT-RJ45GGZZLA01
2. 注塑材质 (Material): 尼龙
3. 最大线径 (Max Cable OD): 7.0mm
4. 防水等级 (Waterproof Level): IP68
5. 接触件材质: 磷铜镀金
Contact Material: Phosphor Copper with Gold Plated

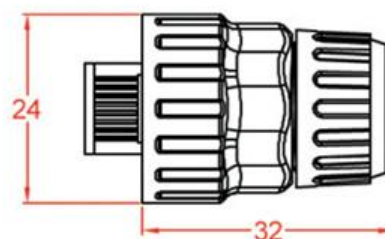

Application

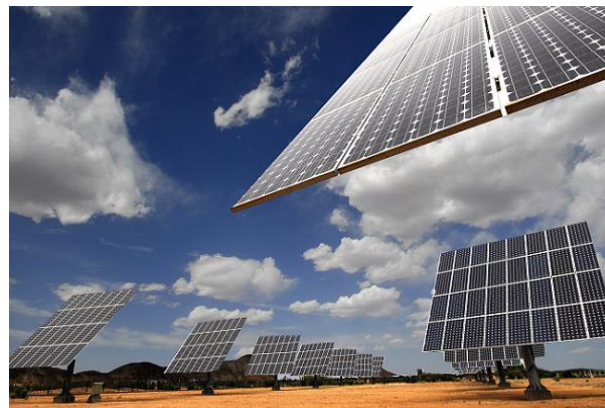

Contact JAB

上海嘉铠电子科技有限公司

Shanghai JAB Electric Technology CO.,LTD

电话/Tel: +86-021-60753001

传真 Fax: +86-021-60753002

手机/Mobil: +86-13918762311

电邮/Email: zjp@jabsh.com

网站/Web: www.jabsh.com

即时通讯/Skype: joe.chow116

即时通讯 QQ: 438389296

地址/Address: 中国, 上海浦东, 金桥开发区, 浙桥路 277 号

No.277, Zheqiao Road, Pudong district, Shanghai, China