


3通气控阀 3-Port Air Operated Valve Series 3A200



3A210-08-NC

规格 Specifications

型号 Model	3A210-06	3A220-06	3A210-08	3A220-08
使用流体 Fluid	过滤压缩空气 Filtered compressed air			
接管口径 Port size	Rc(PT) 1/8		Rc(PT) 1/4	
有效截面积 Effective sectional area (mm ²)	14.0 (Cv=0.78)		16.0 (Cv=0.89)	
使用压力范围 Operating pressure range	0.15~0.8 MPa			
保证耐压力 Proof pressure	1.2 MPa			
环境及流体温度 Ambient and fluid temperature	-5~50℃			
*1) 最大工作频率 Maximum working frequency	5 c/sec			
*2) 润滑 Lubrication	不需要 Not required			

*1) 最大工作频率为空载状态。The maximum working frequency is on no load situation.

*2) 如需润滑请使用透平 1 号油 ISO VG32#. Please use 1st Grade Turbine Oil ISO VG32# if necessary.

型号表示方法 How to Order

3A 2 10 - 06 - NO

结构
Configuration

10	单气控 Single
20	双气控 Double

接管口径
Port size


06	Rc(PT)1/8
08	Rc(PT)1/4

切换方式
Actuation

NO	常开 N.O.
NC	常闭 N.C.

外形尺寸图 Dimensions (mm)

3A210

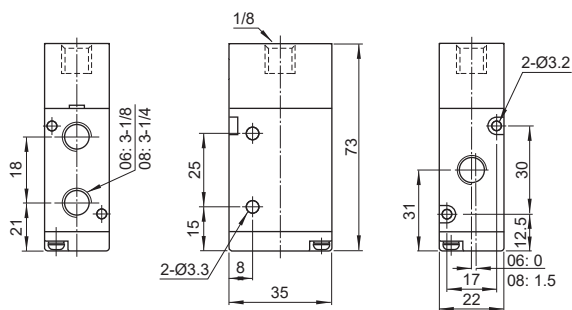

3A220

