


3通气控阀
3-Port Air Operated Valve
Series 3A300



3A310-10-NC

规格 Specifications

型号 Model	3A310-08	3A320-08	3A310-10	3A320-10
使用流体 Fluid	过滤压缩空气 Filtered compressed air			
接管口径 Port size	Rc(PT) 1/4		Rc(PT) 3/8	
有效截面积 Effective sectional area (mm ²)	25.0 (Cv=1.40)		30.0 (Cv=1.68)	
使用压力范围 Operating pressure range	0.15~0.8 MPa			
保证耐压力 Proof pressure	1.2 MPa			
环境及流体温度 Ambient and fluid temperature	-5~50℃			
*1) 最大工作频率 Maximum working frequency	5 c/sec			
*2) 润滑 Lubrication	不需要 Not required			

*1) 最大工作频率为空载状态。The maximum working frequency is on no load situation.
2) 如需润滑请使用透平 1 号油 ISO VG32#。Please use 1st Grade Turbine Oil ISO VG32# if necessary.

型号表示方法 How to Order

3A 3 10 - 08 - NO

结构
Configuration

10	单气控 Single
20	双气控 Double

接管口径
Port size


08	Rc(PT)1/4
10	Rc(PT)3/8

切换方式
Actuation

NO	常开 N.O.
NC	常闭 N.C.

外形尺寸图 Dimensions (mm)

3A310

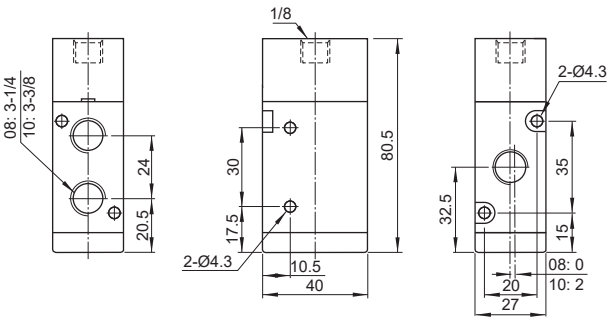

3A320

