


4通手动阀
4-Port Hand Valve
Series 4HV



4HV230C-08

规格 Specifications

型号 Model	4HV2*-06	4HV2*-08	4HV3*-08	4HV3*-10	4HV4*-15	4HV4*-20
使用流体 Fluid	过滤压缩空气 Filtered compressed air					
接管口径 Port size	G1/8	G1/4	G1/4	G3/8	G1/2	G3/4
有效截面积 Effective sectional area (mm ²)	14 (CV=0.78)	16 (CV=0.89)	30 (CV=1.67)	33 (CV=1.83)	88 (CV=4.89)	95 (CV=5.27)
使用压力范围 Operating pressure range	0~1.0 MPa					
保证耐压力 Proof pressure	1.5 MPa					
环境及流体温度 Ambient and fluid temperature	0~60℃					
工作角度 Operating angle	90°					

型号表示方法 How to Order

4HV 2 10 - 08 - S

规格代号
Size code

2
3
4

结构
Configuration

10	2 位 4 通 4/2-Way
30C	3 位 4 通中央封闭 4/3-Way center closed

接管口径
Port size



06	G1/8
08	G1/4
10	G3/8
15	G1/2
20	G3/4

安装方式
Mounting


-	阀体安装 Body mounting
S	面板安装 Panel mounting

外形尺寸图 Dimensions (mm)

4HV*-*

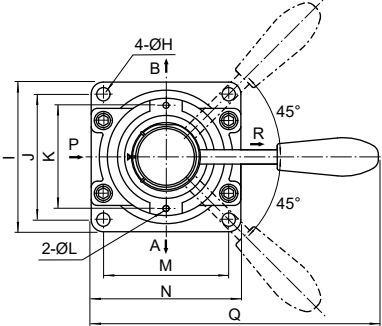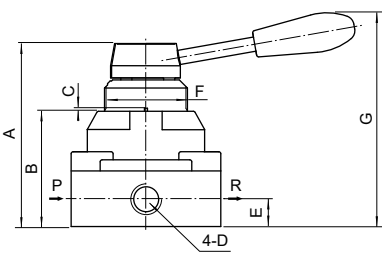

4HV*-*-S

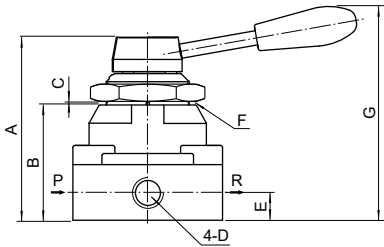

型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Q
4HV2*-06(08)	73	45	1.5	G1/8 (G1/4)	11.5	M34x1.5	92.5	5.5	62	49	40	3	49	62	120
4HV3*-08(10)	88.5	56	1.5	G1/4 (G3/8)	13.5	M40x1.5	104	6.6	74	62	51	3	62	74	140
4HV4*-15(20)	110.3	72	2	G1/2 (G3/4)	18	M52x1.5	132	6.6	102	89	64	3	81	94	175