


微型气缸(单动) Mini Air Cylinder (Single Acting) Series CT (Ø6~Ø15)




规格 Specifications

缸径 Bore size (mm)	6	10	15
接管口径 Port size Rc(PT)	M5x0.8		
使用流体 Fluid	过滤洁净空气 Filtered clean air		
动作形式 Action	单动 (弹簧压回) Single acting (Spring return)		
保证耐压力 Proof pressure (MPa)	1.0		
使用压力范围 Operating pressure range (MPa)	0.2~0.7	0.15~0.7	
环境及流体温度 Ambient and fluid temperature	5~60°C (未冻结 No freezing)		
缓冲 Cushion	无 None		
* 润滑 Lubrication	不需要 Not required		


* 如需要润滑请使用透平 1 号油 ISOVG32。Please use Turbine oil 1st Grade ISOVG32 if necessary.

型号表示方法 How to Order

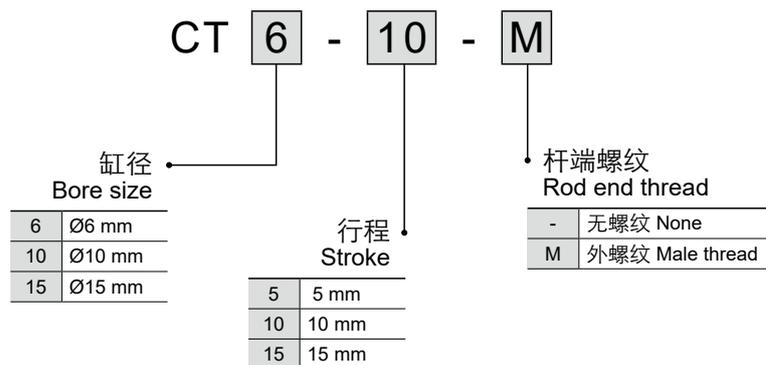

3

外形尺寸图 Dimensions (mm)

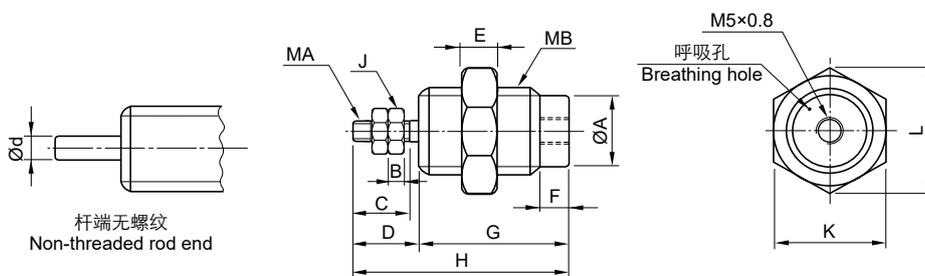

型号 Model	A	B	C	d	D	E	F	G			H			J	K	L	MA	MB
								ST=5	ST=10	ST=15	ST=5	ST=10	ST=15					
CT6	8	2.3	7	3	8.5	3	5	19	26	33	27.5	34.5	41.5	9	14	16	M3x0.5	M10x1.0
CT10	12	3	10	5	11.5	4	5	22	28	35	33.5	39.5	46.5	13	19	22	M4x0.7	M15x1.5
CT15	19	4	10	6	14	5	7	24	30	37	38	44	51	20	27	30	M5x0.8	M22x1.5