

规格 Specifications

型号 Model	HSV06	HSV08	HSV10	HSV15	HSV20	HSV25
结构 Configuration	2 位 3 通 3/2-way					
使用流体 Fluid	过滤压缩空气 Filtered compressed air					
接管口径 Port size Rc (PT)	1/8	1/4	3/8	1/2	3/4	1
有效截面积 Effective sectional area (mm ²)	23 (CV=1.28)	40 (CV=2.2)	62 (CV=3.5)	140 (CV=7.8)	250 (CV=13.8)	392 (CV=21.78)
使用压力范围 Operating pressure range	0~1.0 MPa					
保证耐压力 Proof pressure	1.5 MPa					
环境及流体温度 Ambient and fluid temperature	-20~70°C					
本体材质 Body material	铝合金 Aluminium alloy					

型号表示方法 How to Order

HSV 08 SS

接管口径
Port size


06	1/8
08	1/4
10	3/8
15	1/2
20	3/4
25	1

安装方式
Mounting


-	标准 Standard
FF	双内螺纹 Female thread both
SF	外内螺纹 Male and female thread
SS	双外螺纹 Male thread both

外形尺寸图 Dimensions (mm)


HSV*




HSV*FF



HSV*Sf

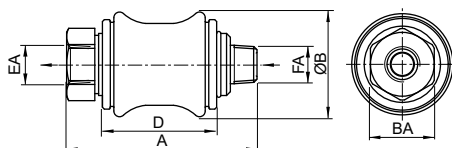

HSV*SS



型号 Model	A				B	BA	D	E	EA	F	FA
	-	FF	SF	SS							
HSV06	50	43	50	57	27.5	17	30	1/8	1/8	1/8	1/8
HSV08	58	47	58	69	30	19	32.5	1/4	1/4	1/4	1/4
HSV10	68.5	55.5	68.5	81.5	35.5	22	39	3/8	3/8	3/8	3/8
HSV15	85.5	70.5	85.5	100.5	44	30	50	1/2	1/2	1/2	1/2
HSV20	96.5	79.5	96.5	113.5	53.5	36	58	3/4	3/4	3/4	3/4
HSV25	114.5	96.5	114.5	132.5	65.5	44	70	1	1	1	1