


ARK

高压2通电磁阀 2-Port High Pressure Solenoid Valve Series **KAB21H**



KAB21H-02-2-V-C-AC220V


规格 Specifications

型号 Model	KAB21H
动作切换 Actuation	直动常闭 Direct operated N.C.
使用流体 Fluid	空气, 水, 瓦斯, 轻油等 Air, water, gas, light oil, etc.
接管口径 Port size	G1/8~G1
使用压力范围 Operating pressure range (MPa)	0~10
阀体材质 Body material	铜, 不锈钢 SS304 Brass, stainless steel SS304
密封材质 Seal material	丁腈橡胶 NBR, 氟橡胶 VITON
环境温度 Ambient temperature	0~65°C
流体温度 Fluid temperature	丁腈橡胶 NBR: 0~80°C, 氟橡胶 VITON: 0~120°C
* 额定电压 Rated Voltage	AC220V, DC24V
容许电压波动范围 Permissible voltage variation	±10% 额定电压 ±10% of rated voltage
安装要求 Mounting requirements	线圈向上, 阀体水平 Coil upwards, body horizontally

* 其他电压可定制。Other voltage can be customized.

型号 Model	接管口径 Port size	通孔直径 Orifice (mm)	Cv	最低压差 Min. differential pressure (MPa)	最高压差 Max. differential pressure (MPa)				功率 Power	
					空气, 水 Air, water		轻油 Light oil (≤ 20CST)		VA	W
					AC	DC	AC	DC	AC	DC
KAB21H-01-1	G1/8	1	0.04	0	10	7.5	10	7.5	24	18.5
KAB21H-01-C1		1.2	0.05	0	9	7	9	7		
KAB21H-01-C2		1.5	0.08	0	7.5	5	7.5	5		
KAB21H-01-2		2	0.14	0	3.5	3	3.5	3		
KAB21H-01-C3		2.5	0.23	0	2	1.5	2	1.5		
KAB21H-02-1	G1/4	1	0.04	0	10	7.5	10	7.5	24	18.5
KAB21H-02-C1		1.2	0.05	0	9	7	9	7		
KAB21H-02-C2		1.5	0.08	0	7.5	5	7.5	5		
KAB21H-02-2		2	0.14	0	3.5	3	3.5	3		
KAB21H-02-C3		2.5	0.23	0	2	1.5	2	1.5		
KAB21H-02-8	G3/8	8	1.0	0.05	9	7	7	5	35	35
KAB21H-03-8		8	1.2	0.05	9	7	7	5	33	25
KAB21H-03-15		15	4.2	0.1	7.5	5.5	5.5	3.5		
KAB21H-04-8	G1/2	8	1.2	0.05	9	7	7	5	35	35
KAB21H-04-15		15	4.2	0.1	7.5	5.5	5.5	3.5	33	25
KAB21H-06-20	G3/4	20	7	0.1	6.5	5	5	3		
KAB21H-08-25	G1	25	11	0.1	5.5	4.5	4.5	3		

型号表示方法 How to Order

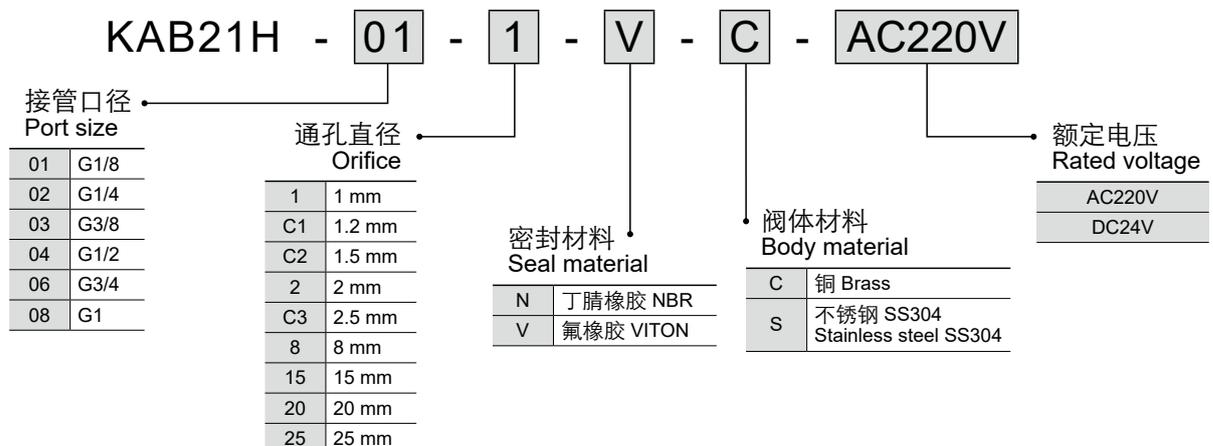


高压2通电磁阀

2-Port High Pressure Solenoid Valve


Series **KAB21H**

外形尺寸图 Dimensions (mm)


KAB21H-01(02)-1(C1, C2, 2, C3)

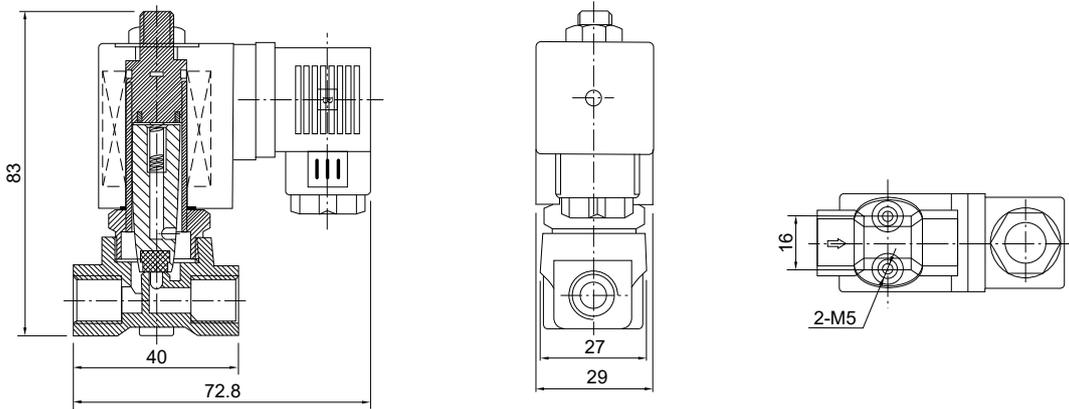

KAB21H-02(03, 04)-8

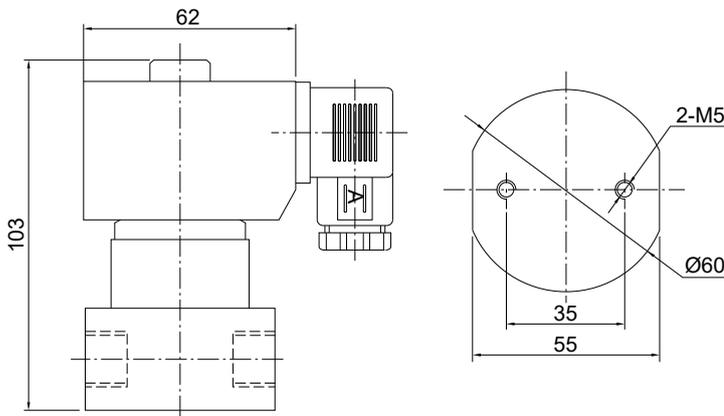

KAB21H-03(04)-15/ KAB21H-06-20/ KAB21H-08-25

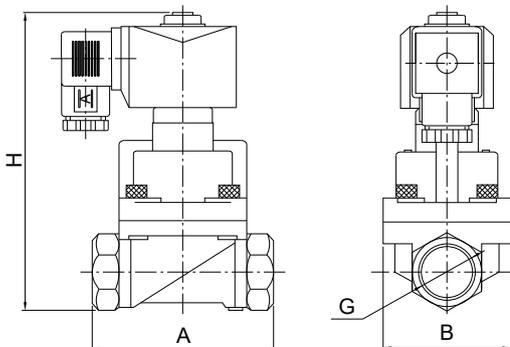

型号 Model	G	A	B	H
KAB21H-03-15	G3/8	75	52	130
KAB21H-04-15	G1/2			
KAB21H-06-20	G3/4	80	60	141
KAB21H-08-25	G1	100	70	148