


ARK

三联件 (空气过滤器+调压阀+油雾器) Air Filter + Regulator + Lubricator Series KAC 2000~6000



KAC3000

规格 Specifications

型号 Model	KAC 2000~6000
使用流体 Fluid	压缩空气 Compressed air
保证耐压力 Proof pressure	1.5 MPa
最高使用压力 Maximum operating pressure	1.0 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C
过滤精度 Filtration	10 μm
建议润滑油 Recommended lubricant	透平 1 号油 Turbine oil 1st Grade ISOVG32
滤杯材料 Bowl material	聚碳酸酯 Polycarbonate
调压范围 Regulating pressure range	0.05~0.85 MPa
调压阀型结构 Construction of regulator	带溢流型 Relief type


1

型号 Model		组件 Components			规格 Specifications				配件 Accessories			
手动排水 Manual drain	自动排水 Auto drain	空气过滤器 Air filter	调压阀 Regulator	油雾器 Lubricator	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)	压力表口径 Port size of gauge Rc(PT)	质量 Weight (kg)	支架 (2件) Bracket (2 pcs.)	压力表 (任选) Gauge (Option)	自动排水器浮子 Auto drain float	滤杯防护罩 Bowl guard
KAC2000-02	KAC2000-02D	KAF2000	KAR2000	KAL2000	500	1/4	1/8	0.74	B210T	KG40-10-01		
KAC3000-03	KAC3000-03D	KAF3000	KAR3000	KAL3000	2000	3/8	1/8	1.18	B310L		SAD300	有 Equipped
KAC4000-04	KAC4000-04D	KAF4000	KAR4000	KAL4000	4000	1/2	1/4	2.14	B410L	SAD400		
KAC4000-06	KAC4000-06D	KAF4000	KAR4000	KAL4000	4500	3/4	1/4	2.47	B510L	SAD400		
KAC6000-06	KAC6000-06D	KAF6000	KAR6000	KAL6000	6000	3/4	1/4	3.82	B610L	SAD400		
KAC6000-10	KAC6000-10D	KAF6000	KAR6000	KAL6000	6000	1	1/4	3.82	B610L	SAD400		


* 额定流量指进气压力为 0.7MPa 的条件下。Flow rate is at supply pressure 0.7 MPa.

外形尺寸图 Dimensions (mm)

KAC2000

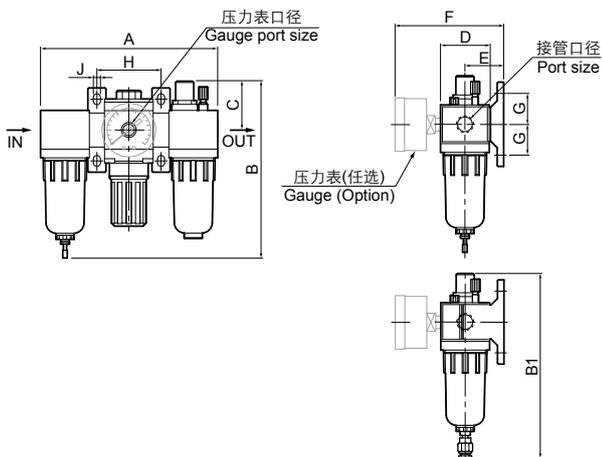

KAC3000~6000

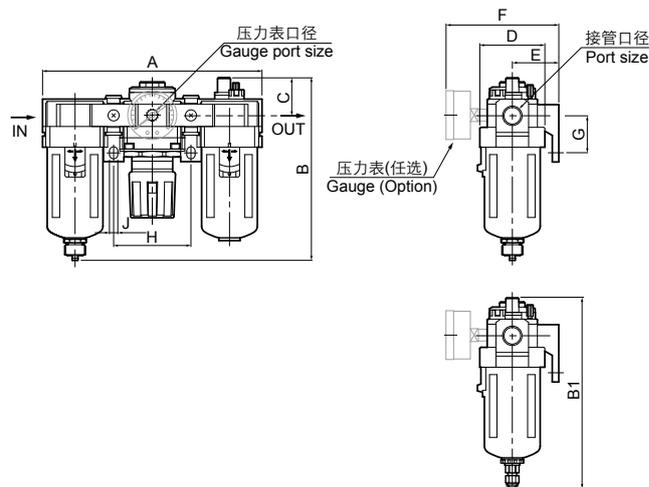

型号 Model	接管口径 Port size Rc(PT)	A	手动排水 Manual drain	自动排水 Auto drain	C	D	E	F	G	H	J
			B	B1							
KAC2000-02	1/4	138	139	146	38	38	30	74	24	50	5.5
KAC3000-03	3/8	181	163	170	38	53	41	102	35	64	7
KAC4000-04	1/2	238	197	204	41	70	50	120	40	84	9
KAC4000-06	3/4	252	201	208	41	70	50	150	40	89	8.5
KAC6000-06/10	3/4, 1	300	293	300	48	90	70	150	50	105	12