


主路过滤器 Main Line Filter Series KAFF 150~850



KAFF550

规格 Specifications


型号 Model	KAFF 150~850
使用流体 Fluid	压缩空气 Compressed air
最高使用压力 Maximum operating pressure	1.0 MPa
最低使用压力 Minimum operating pressure	0.15 MPa
保证耐压力 Proof pressure	1.5 MPa
环境及流体温度 Ambient and fluid temperature	-5~60°C (未冻结 No freezing)
过滤精度 Filtration	1 μm (去除率 Filtration efficiency: 99%)
滤芯寿命 Life of filter element	2 年或压力差达到 0.1 MPa 时需更换滤芯 Change filter element after 2 years or when pressure drop reaches 0.1 MPa

型号 Model		规格 Specifications		支架 (任选) Bracket (Option)	滤芯 Filter element	自动排水 器浮子
手动排水 Manual drain	自动排水 Auto drain	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)			Auto drain float
KAFF150-01	KAFF150-01D	280	1/8	B150	KAFF-EL150	SAD400
KAFF150-02	KAFF150-02D	280	1/4	B150	KAFF-EL150	
KAFF250-02	KAFF250-02D	700	1/4	B250	KAFF-EL250	
KAFF250-03	KAFF250-03D	700	3/8	B250	KAFF-EL250	
KAFF350-03	KAFF350-03D	1500	3/8	B350	KAFF-EL350	
KAFF350-04	KAFF350-04D	1500	1/2	B350	KAFF-EL350	
KAFF450-06	KAFF450-06D	2200	3/4	B450	KAFF-EL450	
KAFF550-06	KAFF550-06D	3700	3/4	B550	KAFF-EL550	
KAFF550-10	KAFF550-10D	3700	1	B550	KAFF-EL550	
KAFF650-12	KAFF650-12D	6000	1 1/4	B650	KAFF-EL650	
KAFF650-14	KAFF650-14D	6000	1 1/2	B650	KAFF-EL650	
KAFF850-14	KAFF850-14D	12000	1 1/2	B850	KAFF-EL850	
KAFF850-20	KAFF850-20D	12000	2	B850	KAFF-EL850	


* 额定流量指进气压力为 0.7MPa 的条件下。Flow rate is at supply pressure 0.7 MPa.

外形尺寸图 Dimensions (mm)

KAFF150~550

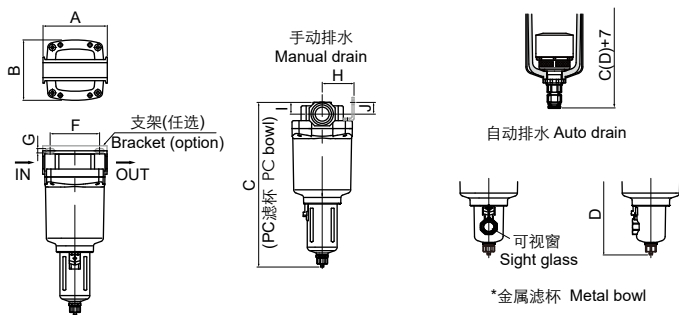


KAFF650~850

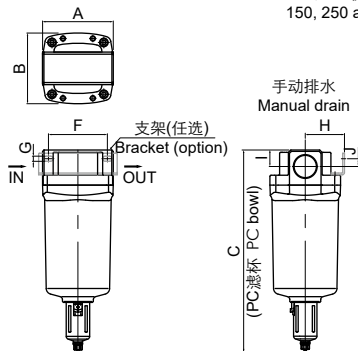

* 150, 250 仅有防护罩和金属滤杯一体的型式。
150, 250 are the integral cover and metal bowl only.

流量特性 Flow Characteristics

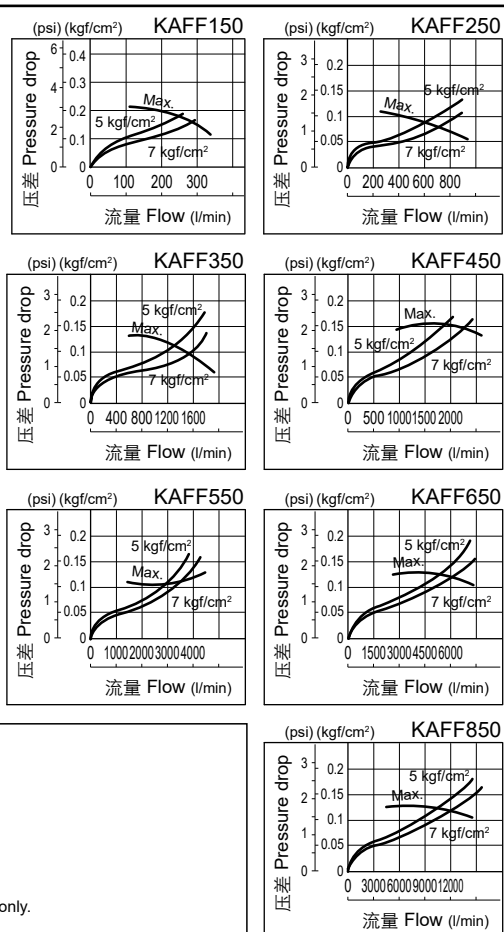

型号 Model	接管口径 Port size Rc(PT)	A	B	C	D (MeF)	F	G	H	I	J
KAFF150	1/8, 1/4	67	66	-	158.5	56	6	33.6	10.5	19.7
KAFF250	1/4	82	76	-	177.7	66	6	39.5	14	13.5
KAFF350	3/8, 1/2	98	90	270.3	253	80	7	49.8	17.9	15.9
KAFF450	3/4	114	106	288.6	271.3	90	9	56.2	19.8	15.3
KAFF550	3/4, 1	130	122	328.5	311.2	100	8.8	64.5	23.7	21
KAFF650	1 1/2	160	160	378.5	361.2	150	13	93	32	27
KAFF850	1 1/2, 2	180	180	508	490.7	150	13	100	42	20