


水分分离器 Water Separator Series KAMG 150~850



KAMG550

规格 Specifications


型号 Model	KAMG 150~850
使用流体 Fluid	压缩空气 Compressed air
最高使用压力 Maximum operating pressure	1.0 MPa
最低使用压力 Minimum operating pressure	0.15 MPa
保证耐压力 Proof pressure	1.5 MPa
环境及流体温度 Ambient and fluid temperature	-5~60°C (未冻结 No freezing)
水分除去率 Removal rate of water	99%
滤芯寿命 Life of filter element	2 年或压力差达到 0.1 MPa 时需更换滤芯 Change filter element after 2 years or when pressure drop reaches 0.1 MPa

1

型号 Model		规格 Specifications		支架 (任选) Bracket (Option)	滤芯 Filter element	自动排水 器浮子 Auto drain float
手动排水 Manual drain	自动排水 Auto drain	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)			
KAMG150-01	KAMG150-01D	300	1/8	B150	KAMG-EL150	SAD400
KAMG150-02	KAMG150-02D	300	1/4	B150	KAMG-EL150	
KAMG250-02	KAMG250-02D	750	1/4	B250	KAMG-EL250	
KAMG250-03	KAMG250-03D	750	3/8	B250	KAMG-EL250	
KAMG350-03	KAMG350-03D	1450	3/8	B350	KAMG-EL350	
KAMG350-04	KAMG350-04D	1450	1/2	B350	KAMG-EL350	
KAMG450-06	KAMG450-06D	2200	3/4	B450	KAMG-EL450	
KAMG550-06	KAMG550-06D	3500	3/4	B550	KAMG-EL550	
KAMG550-10	KAMG550-10D	3500	1	B550	KAMG-EL550	
KAMG650-12	KAMG650-12D	6000	1 1/4	B650	KAMG-EL650	
KAMG650-14	KAMG650-14D	6000	1 1/2	B650	KAMG-EL650	
KAMG850-14	KAMG850-14D	12000	1 1/2	B850	KAMG-EL850	
KAMG850-20	KAMG850-20D	12000	2	B850	KAMG-EL850	


* 额定流量指进气压力为 0.7MPa 的条件下。Flow rate is at supply pressure 0.7 MPa.

流量特性 Flow Characteristics

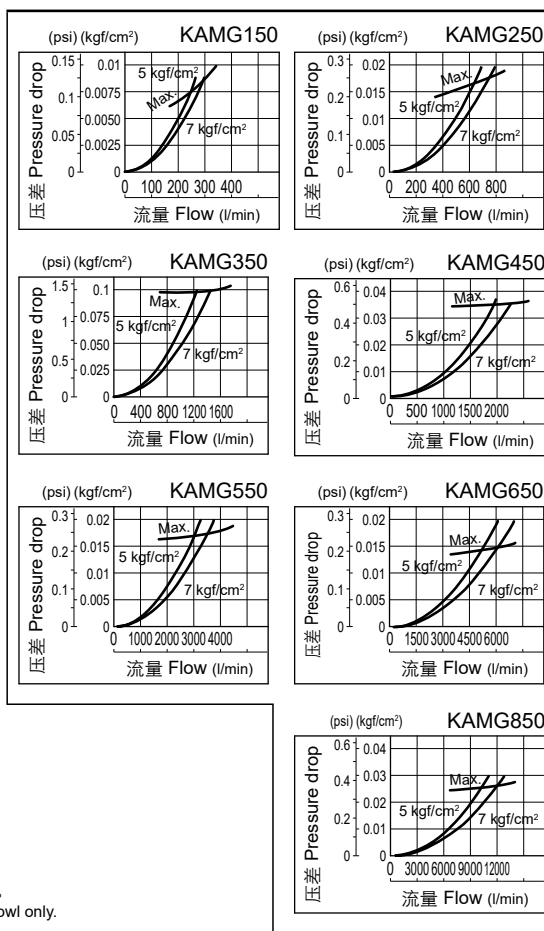


外形尺寸图 Dimensions (mm)

KAMG150~550

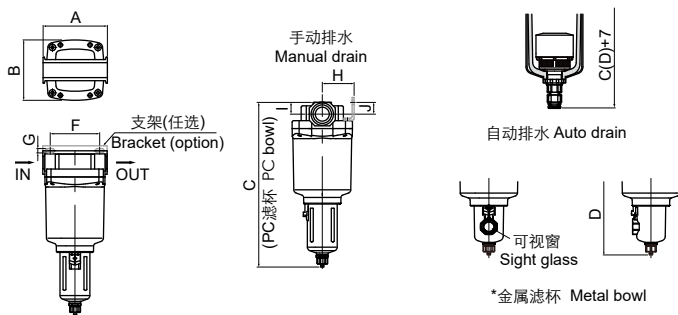

* 150, 250 仅有防护罩和金属滤杯一体的型式。
150, 250 are the integral cover and metal bowl only.

KAMG650~850

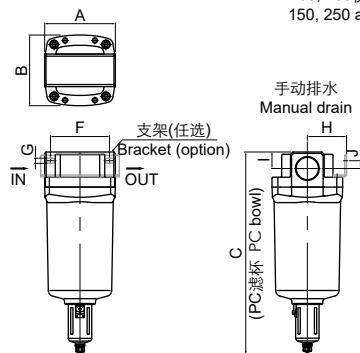

型号 Model	接管口径 Port size Rc(PT)	A	B	C	D (MeF)	F	G	H	I	J
KAMG150	1/8, 1/4	67	66	-	158.5	56	6	33.6	10.5	19.7
KAMG250	1/4	82	76	-	177.7	66	6	39.5	14	13.5
KAMG350	3/8, 1/2	98	90	270.3	253	80	7	49.8	17.9	15.9
KAMG450	3/4	114	106	288.6	271.3	90	9	56.2	19.8	15.3
KAMG550	3/4, 1	130	122	328.5	311.2	100	8.8	64.5	23.7	21
KAMG650	1 1/2	160	160	378.5	361.2	150	13	93	32	27
KAMG850	1 1/2, 2	180	180	508	490.7	150	13	100	42	20