


微雾分离器带前置过滤 Micro Mist Separator with Prefilter Series KAMH 150~850



KAMH550

规格 Specifications

型号 Model	KAMH 150~850
使用流体 Fluid	压缩空气 Compressed air
最高使用压力 Maximum operating pressure	1.0 MPa
最低使用压力 Minimum operating pressure	0.15 MPa
保证耐压力 Proof pressure	1.5 MPa
环境及流体温度 Ambient and fluid temperature	-5~60°C (未冻结 No freezing)
过滤精度 Filtration	0.1 μm+0.01 μm
滤芯寿命 Life of filter element	2 年或压力差达到 0.1 MPa 时需更换滤芯 Change filter element after 2 years or when pressure drop reaches 0.1 MPa


1

型号 Model		规格 Specifications		支架 (任选) Bracket (Option)	滤芯 Filter element	自动排水 器浮子
手动排水 Manual drain	自动排水 Auto drain	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)			Auto drain float
KAMH150-01	KAMH150-01D	200	1/8	B150	KAMH-EL150	SAD400
KAMH150-02	KAMH150-02D	200	1/4	B150	KAMH-EL150	
KAMH250-02	KAMH250-02D	500	1/4	B250	KAMH-EL250	
KAMH250-03	KAMH250-03D	500	3/8	B250	KAMH-EL250	
KAMH350-03	KAMH350-03D	1000	3/8	B350	KAMH-EL350	
KAMH350-04	KAMH350-04D	1000	1/2	B350	KAMH-EL350	
KAMH450-06	KAMH450-06D	2000	3/4	B450	KAMH-EL450	
KAMH550-06	KAMH550-06D	4000	3/4	B550	KAMH-EL550	
KAMH550-10	KAMH550-10D	4000	1	B550	KAMH-EL550	
KAMH650-12	KAMH650-12D	7000	1 1/4	B650	KAMH-EL650	
KAMH650-14	KAMH650-14D	7000	1 1/2	B650	KAMH-EL650	
KAMH850-14	KAMH850-14D	13000	1 1/2	B850	KAMH-EL850	
KAMH850-20	KAMH850-20D	13000	2	B850	KAMH-EL850	


* 额定流量指进气压力为 0.7MPa 的条件下。Flow rate is at supply pressure 0.7 MPa.

外形尺寸图 Dimensions (mm)

KAMH150~550

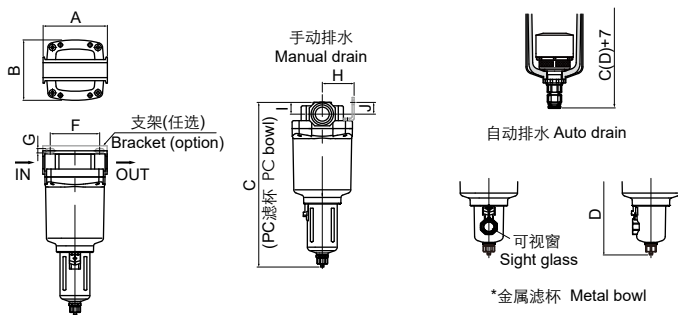


KAMH650~850

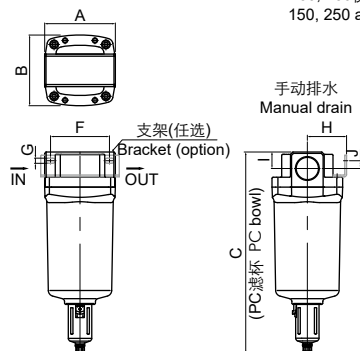

* 150, 250 仅有防护罩和金属滤杯一体的型式。
150, 250 are the integral cover and metal bowl only.

流量特性 Flow Characteristics

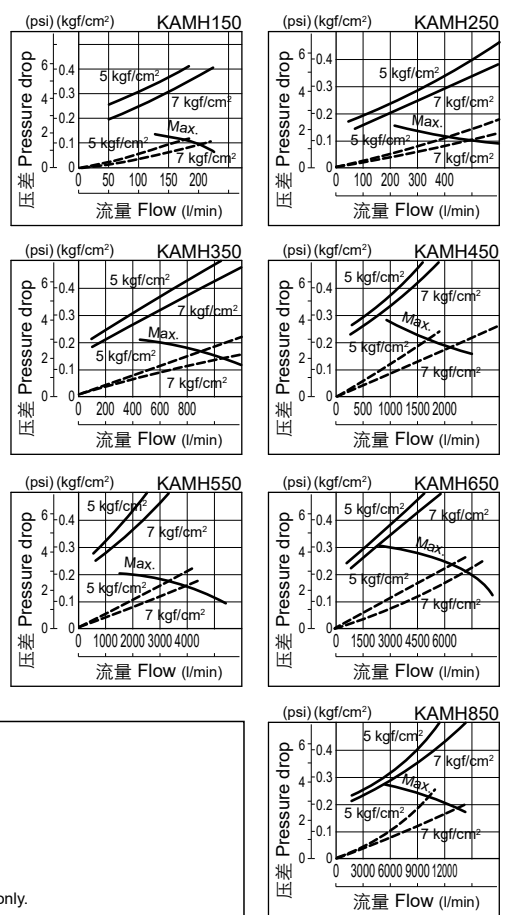

型号 Model	接管口径 Port size Rc(PT)	A	B	C	D (MeF)	F	G	H	I	J
KAMH150	1/8, 1/4	67	66	-	158.5	56	6	33.6	10.5	19.7
KAMH250	1/4	82	76	-	177.7	66	6	39.5	14	13.5
KAMH350	3/8, 1/2	98	90	270.3	253	80	7	49.8	17.9	15.9
KAMH450	3/4	114	106	288.6	271.3	90	9	56.2	19.8	15.3
KAMH550	3/4, 1	130	122	328.5	311.2	100	8.8	64.5	23.7	21
KAMH650	1 1/2	160	160	378.5	361.2	150	13	93	32	27
KAMH850	1 1/2, 2	180	180	508	490.7	150	13	100	42	20