


快速排气阀 Quick Exhaust Valve Series KAQ 2000~5000






KAQ2000-02

规格 Specifications

型号 Model	KAQ 2000~5000
使用流体 Fluid	过滤压缩空气 Filtered compressed air
最高使用压力 Maximum operating pressure	1.0 MPa
最低使用压力 Minimum operating pressure	0.1 MPa
保证耐压力 Proof pressure	1.5 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C

型号 Model	接管口径 Port size Rc(PT)	有效截面积 Effective sectional area (mm ²)	
		入 - 出 In-Out	出 - 排气 Out-Exhaust
KAQ2000-02	1/4	35	40
KAQ3000-03	3/8	60	70
KAQ4000-04	1/2	105	115
KAQ5000-06	3/4	135	180
KAQ5000-10	1	176	187

外形尺寸图 Dimensions (mm)

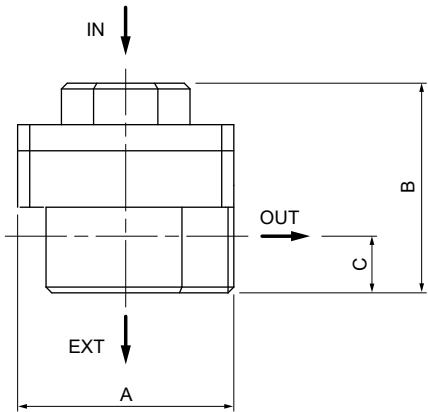

型号 Model	接管口径 Port size Rc(PT)	A	B	C	D	E
KAQ2000-02	1/4	45	10	40	45	35
KAQ3000-03	3/8	56	15	55	56	44
KAQ4000-04	1/2	56	15	55	56	44
KAQ5000-06/10	3/4, 1	80	18	71	80	58