

KAR400


规格 Specifications

型号 Model	KAR 100~600
使用流体 Fluid	压缩空气 Compressed air
保证耐压力 Proof pressure	1.5 MPa
最高使用压力 Maximum operating pressure	1.0 MPa
调压范围 Regulating pressure range	0.05~0.85 MPa
环境及流体温度 Ambient and fluid temperature	-5~60°C (不冻结 No freezing)
阀型结构 Construction	带溢流型 Relief type

型号 Model	接管口径 Port size Rc(PT)	配件 Accessories			
		支架 (任选) Bracket (Option)	压力表 (任选) Gauge (Option)		
			口径 Port size Rc(PT)	圆形 Round	方形嵌入 Square embedded
KAR100-M5	M5	B120	1/16	KG25	
KAR200-01	1/8	B220	1/8	KG40-10-01	KGs28
KAR200-02	1/4	B220			
KAR300-02	1/4	B320			
KAR300-03	3/8	B320			
KAR400-04	1/2	B420	1/4	KG50-10-02	KGs28
KAR400-06	3/4	B420			
KAR600-06	3/4	B600			
KAR600-10	1	B600			


流量特性 Flow Characteristics

进气压 7kg/cm²
Inlet pressure

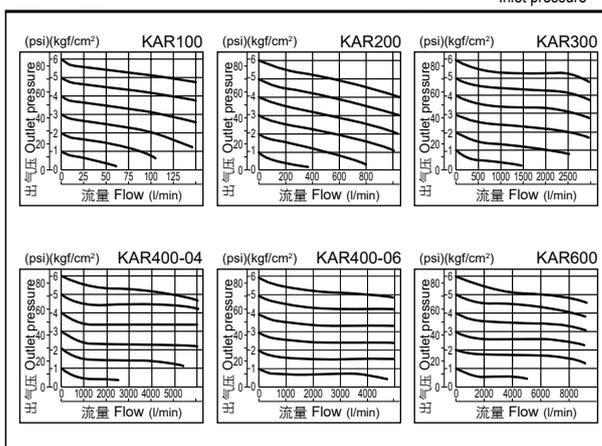


外形尺寸图 Dimensions (mm)


KAR100

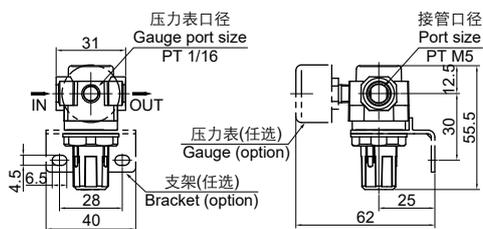

KAR300, KAR400

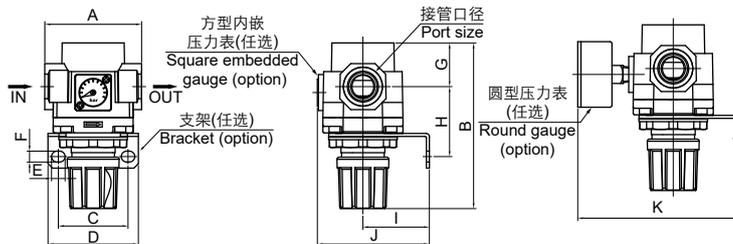

KAR200

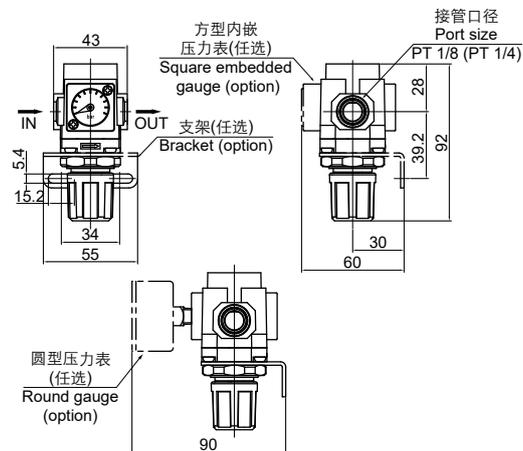

型号 Model	接管口径 Port size Rc(PT)	A	B	C	D	E	F	G	H	I	J	K
KAR300-02(03)	1/4, 3/8	57	117	40	53	8	6.5	28.4	45.7	41	72	107
KAR400-04	1/2	75	125	54	70	10.5	8.5	34	54	50	87	127
KAR400-06	3/4	75	127	54	70	10.5	8.5	34.5	55.5	50	87	127

KAR600

