



KAR3000M

规格 Specifications

型号 Model	KAR3000M
使用流体 Fluid	压缩空气 Compressed air
保证耐压力 Proof pressure	1.5 MPa
最高使用压力 Maximum operating pressure	1.0 MPa
调压范围 Regulating pressure range	0.05~0.85 MPa
环境及流体温度 Ambient and fluid temperature	-5~60°C (不冻结 No freezing)
阀型结构 Construction	带溢流型 Relief type

型号 Model	接管口径 Port size Rc(PT)	配件 Accessories			
		支架 Bracket	压力表 Gauge		
			口径 Port size Rc(PT)	圆形 Round (任选 Option)	方形嵌入 Square embedded
KAR3000M-02	1/4	带支架 With bracket	1/8	KG40	带嵌入式压力表 With embedded gauge
KAR3000M-03	3/8				
KAR3000M-04	1/2				

流量特性图 Flow Characteristics

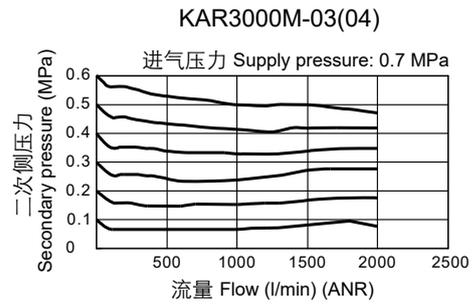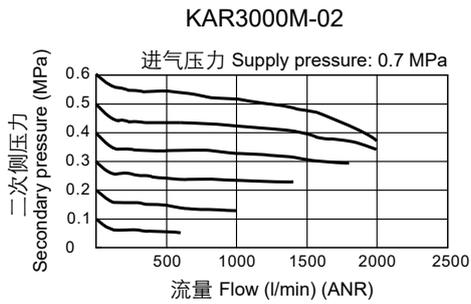

外形尺寸图 Dimensions (mm)

