

KAR8025

规格 Specifications


型号 Model	KAR 8025~9025
使用流体 Fluid	压缩空气 Compressed air
保证耐压力 Proof pressure	1.5 MPa
最高使用压力 Maximum operating pressure	1.0 MPa
调压范围 Regulating pressure range	0.05~0.85 MPa
环境及流体温度 Ambient and fluid temperature	-5~60°C (不冻结 No freezing)
阀型结构 Construction	带溢流型 Relief type

型号 Model	规格 Specifications			配件 Accessories 压力表 (任选) Gauge (Option)
	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)	压力表口径 Port size of gauge Rc(PT)	
KAR8025-12	18000	1 1/4	1/4	KG50-10-02
KAR8025-14	18000	1 1/2		
KAR9025-20	22000	2		

* 额定流量指进气压力为 0.7MPa，二次侧压力设定 0.5MPa 的条件下。
Flow rate is at supply pressure 0.7 MPa and secondary pressure setting 0.5 MPa.

外形尺寸图 Dimensions (mm)

KAR8025, KAR9025

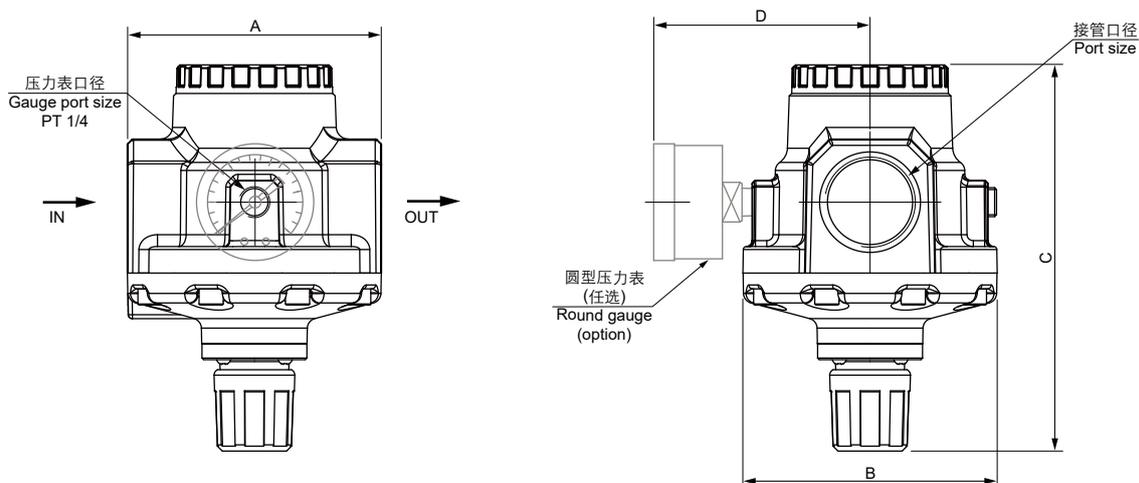

型号 Model	接管口径 Port size Rc(PT)	A	B	C	D
KAR8025-12(14)	1 1/4, 1 1/2	126	126	198	103
KAR9025-20	2	160	160	226	119