


## 直动型2通电磁阀 2-Port Direct Operated Solenoid Valve Series **KBS**



KBS08XC-5-V-S-D-AC220V


### 规格 Specifications

型号 Model	KBS
动作切换 Actuation	直动常闭 Direct operated N.C.
使用流体 Fluid	空气, 水, 热水, 瓦斯, 轻油等 Air, water, hot water, gas, light oil, etc.
接管口径 Port size	G1/8~G1/2
使用压力范围 Operating pressure range (MPa)	0~1.3
阀体材质 Body material	铜, 不锈钢 SS316 Brass, stainless steel SS316
密封材质 Seal material	丁腈橡胶 NBR, 氟橡胶 VITON, 乙丙橡胶 EPDM
环境温度 Ambient temperature	0~65°C
流体温度 Fluid temperature	丁腈橡胶 NBR: 0~80°C, 氟橡胶 VITON: 0~120°C, 乙丙橡胶 EPDM: 0~130°C
额定电压 Rated Voltage	AC24V, AC110V, AC220V, DC12V, DC24V
容许电压波动范围 Permissible voltage variation	±10% 额定电压 ±10% of rated voltage
安装要求 Mounting requirements	任意 (在动作压力差范围内) Free (within differential operating pressure range)

* 型号 Model	接管口径 Port size	通孔直径 Orifice (mm)	Cv	最低压差 Min. differential pressure (MPa)	最高压差 Max. differential pressure (MPa)				功率 Power	
					空气, 水 Air, water		轻油 Light oil (≤ 20CST)		VA	W
					AC	DC	AC	DC	AC	DC
KBS06XC-3	G1/8	3	0.23	0	1.3	1.3	1	1	22	13
KBS06XC-5		5	0.65	0	0.4	0.25	0.25	0.2		
KBS06XC-6		6	0.8	0	0.3	0.2	0.25	0.2		
KBS08XC-3	G1/4	3	0.23	0	1.3	1.3	1	1		
KBS08XC-5		5	0.65	0	0.4	0.25	0.25	0.2		
KBS08XC-6		6	0.8	0	0.3	0.2	0.25	0.2		
KBS10XC-5	G3/8	5	0.65	0	0.4	0.25	0.25	0.2		
KBS10XC-6		6	0.8	0	0.3	0.2	0.25	0.2		
KBS15XC-5	G1/2	5	0.65	0	0.4	0.25	0.25	0.2		
KBS15XC-6		6	0.8	0	0.3	0.2	0.25	0.2		

\* 可选择防爆等级 ExmII T4 的防爆线圈。Explosion-proof connector of Grade ExmII T4 is available.

### 型号表示方法 How to Order

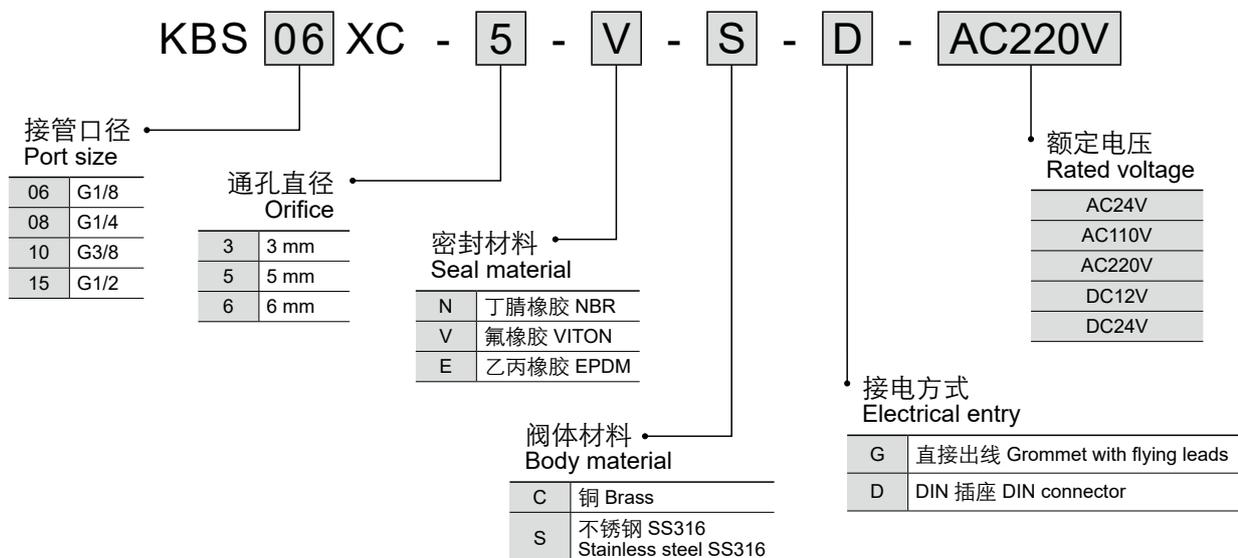


# 直动型2通电磁阀

## 2-Port Direct Operated Solenoid Valve


### Series **KBS**

外形尺寸图 Dimensions (mm)

KBS06(08)XC-3

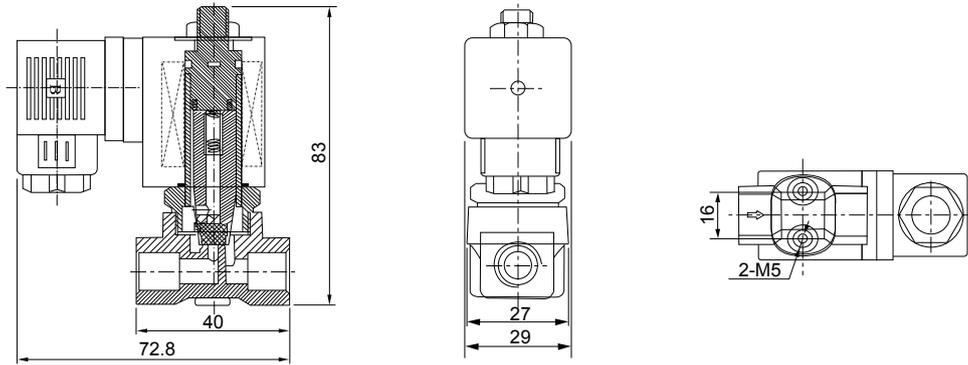

KBS06(08)XC-5(6)

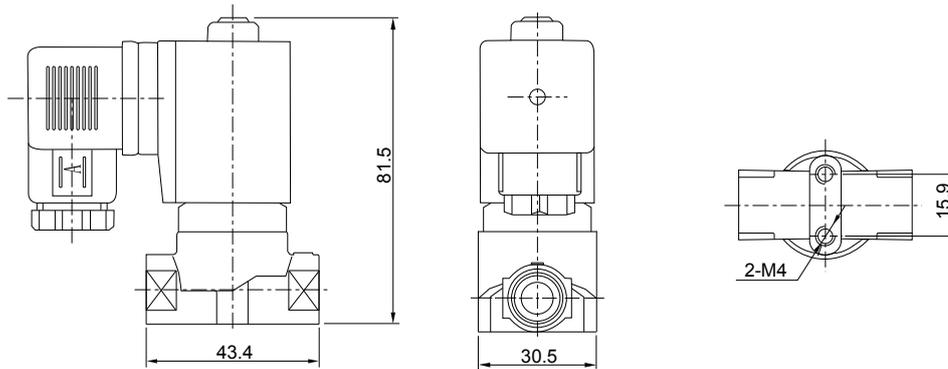

KBS10(15)XC-5(6)

