


## 微型气缸(单动) Mini Air Cylinder (Single Acting) Series **KCJP** (Ø4~Ø15)




### 规格 Specifications

缸径 Bore size (mm)	4	6	10	15
接管口径 Port size Rc(PT)	M3x0.5	M5x0.8		
使用流体 Fluid	过滤压缩空气 Filtered compressed air			
动作形式 Action	单动 (弹簧压回) Single acting (spring return)			
保证耐压力 Proof pressure (MPa)	1.0			
使用压力范围 Operating pressure range (MPa)	0.3~0.7	0.2~0.7	0.15~0.7	
环境及流体温度 Ambient and fluid temperature	-5~60°C (未冻结 No freezing)			
缓冲 Cushion	无 None			
行程公差 Stroke tolerance (mm)	+1.0 0			
* 润滑 Lubrication	不需要 Not required			

\* 如需要润滑请使用透平 1 号油 ISOVG32。Please use Turbine oil 1st Grade ISOVG32 if necessary.

### 型号表示方法 How to Order

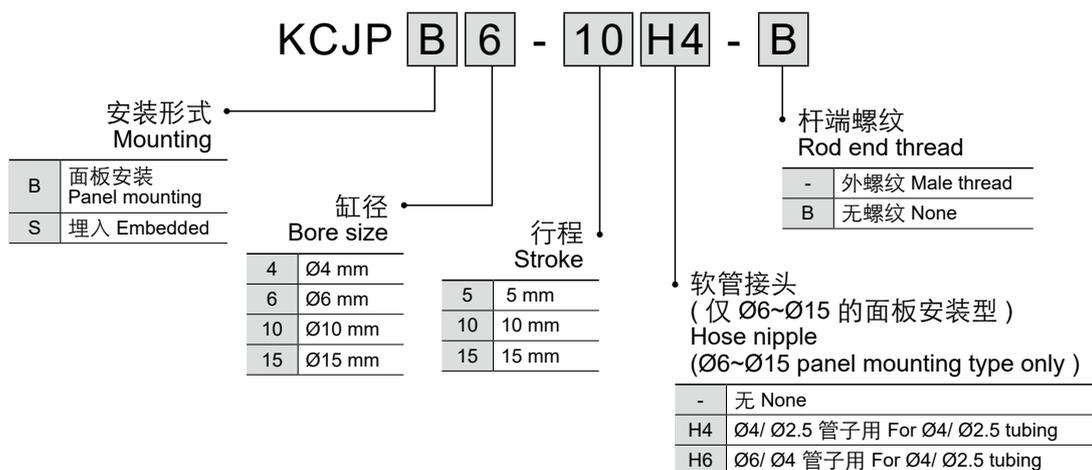


3


### 外形尺寸图 Dimensions (mm)

#### 埋入型的安装孔推荐尺寸

#### Recommended Mounting Hole Dimensions for Embedded Type



埋入状态 When embedded



安装加工尺寸图  
Machining dimensions for mounting

缸径 Bore size	A			B			C			D	E	F	G
	ST=5	ST=10	ST=15	ST=5	ST=10	ST=15	ST=5	ST=10	ST=15				
4	12	20	28	8.5	16.5	24.5	6	14	22	3.5	M8x1.0	6.5	3
6	16	23	30	12.5	19.5	26.5	10	17	24	3.5	M10x1.0	8.5	3
10	17	23.5	30.5	13.5	20	27	10.5	17	24	3.5	M15x1.5	12	4
15	19	25	31.5	14.5	20.5	27	11.5	17.5	24	4.5	M22x1.5	19	5


# 微型气缸(单动)

## Mini Air Cylinder (Single Acting)


### Series **KCJP**

外形尺寸图 Dimensions (mm)


#### KCJPB4

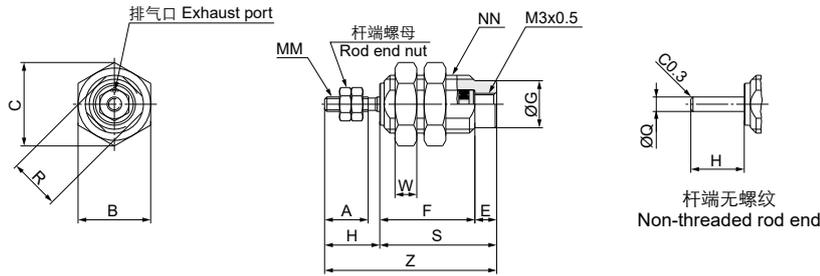


#### KCJPS4



#### KCJPB (Ø6~Ø15)

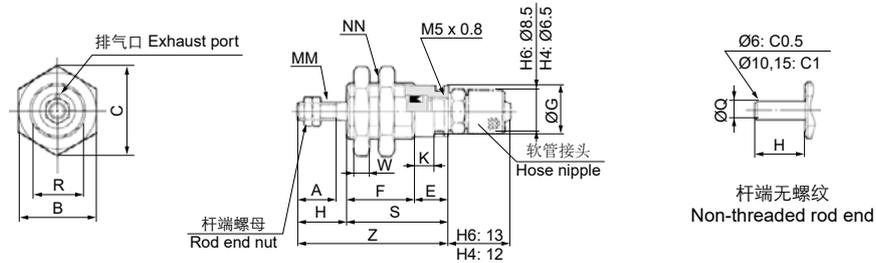

#### KCJPS (Ø6~Ø15)



缸径 Bore size	A	B	C	E (E1)	F(F1)			G	H	K	MM	NN	R	S			W	Z			Q
					ST=5	ST=10	ST=15							ST=5	ST=10	ST=15		ST=5	ST=10	ST=15	
4	6	10	11.5	3(6)	13(10)	21(18)	29(26)	6.5	7.5	3.5	M2x0.4	M8x1.0	7	16	24	32	3	23.5	31.5	39.5	2
6	7	12	13.9	6	12.5	19.5	26.5	8.5	9	3.5	M3x0.5	M10x1.0	9	18.5	25.5	32.5	3	27.5	34.5	41.5	3
10	10	19	22	6	14.5	21	28	12	12	3.5	M4x0.7	M15x1.5	13	20.5	27	34	4	32.5	39	46	5
15	12	27	31	7	16.5	22.5	29	19	14	4.2	M5x0.8	M22x1.5	20	23.5	29.5	36	5	37.5	43.5	50	6