


双轴型双缸气缸 Dual Rod Air Cylinder/ Double Rod Series **KCXSW** (Ø10~Ø25)



规格 Specifications

缸径 Bore size (mm)	10	15	20	25
接管口径 Port size Rc(PT)	M5x0.8			1/8
使用流体 Fluid	过滤压缩空气 Filtered compressed air			
动作形式 Action	双动 Double acting			
保证耐压力 Proof pressure (MPa)	1.0			
使用压力范围 Operating pressure range (MPa)	0.15~0.7		0.1~0.7	
环境及流体温度 Ambient and fluid temperature	-5~60℃ (未冻结 No freezing)			
活塞速度 Piston speed	50~500 mm/s			
缓冲 Cushion	橡胶缓冲 Rubber bumper			
行程调整范围 Stroke adjustable range	0~10 mm (对应标准行程 To the standard stroke)			
* 润滑 Lubrication	不需要 Not required			

* 如需要润滑请使用透平 1 号油 ISOVG32。Please use Turbine oil 1st Grade ISOVG32 if necessary.

行程 / 磁性开关 Stroke/ Auto switch

缸径 Bore size (mm)	标准行程 Standard stroke (mm)	磁性开关 Auto switch	开关固定码 Switch clamp
10	10, 20, 30, 40, 50, 75, 100	D-M9BK	PS
15, 20, 25	10, 20, 30, 40, 50, 75, 100, 125, 150		

* 非标行程可定制。Nonstandard stroke can be customized.

型号表示方法 How to Order

KCXSW M 20 - 20

轴承 Bearing

M 滑动轴承 Slide bearing

行程
Stroke
(mm)

缸径
Bore size
(mm)


双轴型双缸气缸

Dual Rod Air Cylinder/ Double Rod


Series **KCXS**W

外形尺寸图 Dimensions (mm)

KCXSWM10

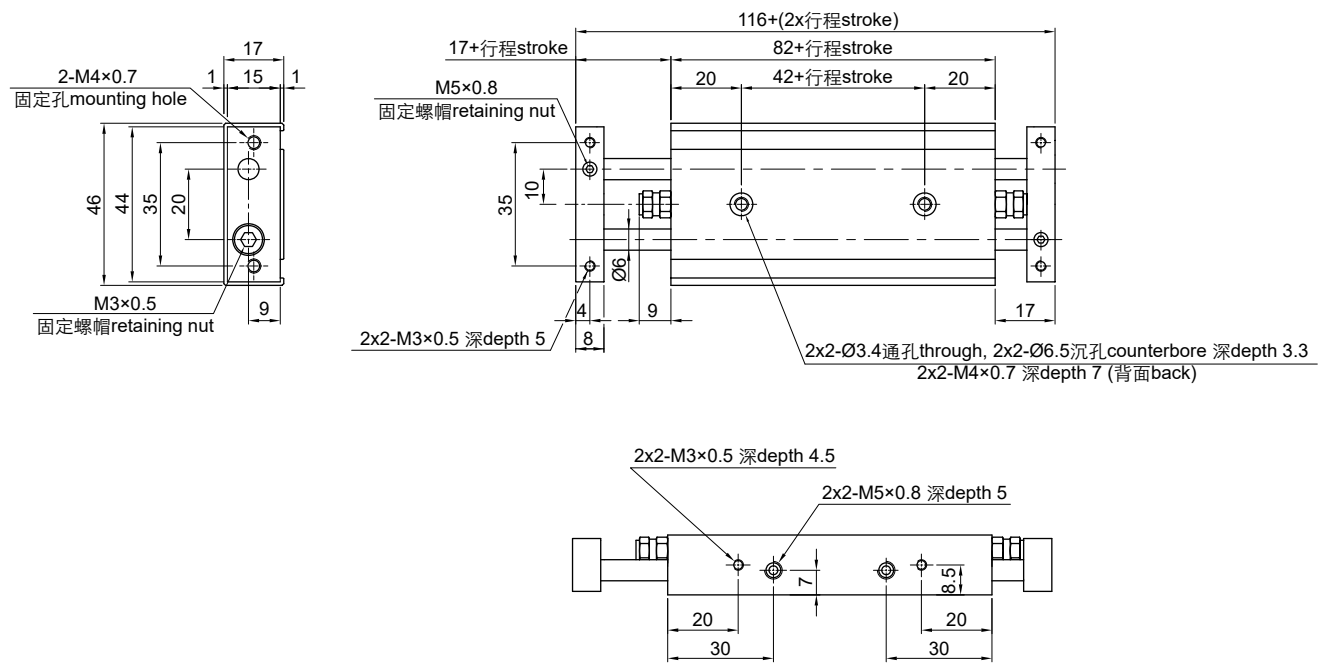

KCXSWM15

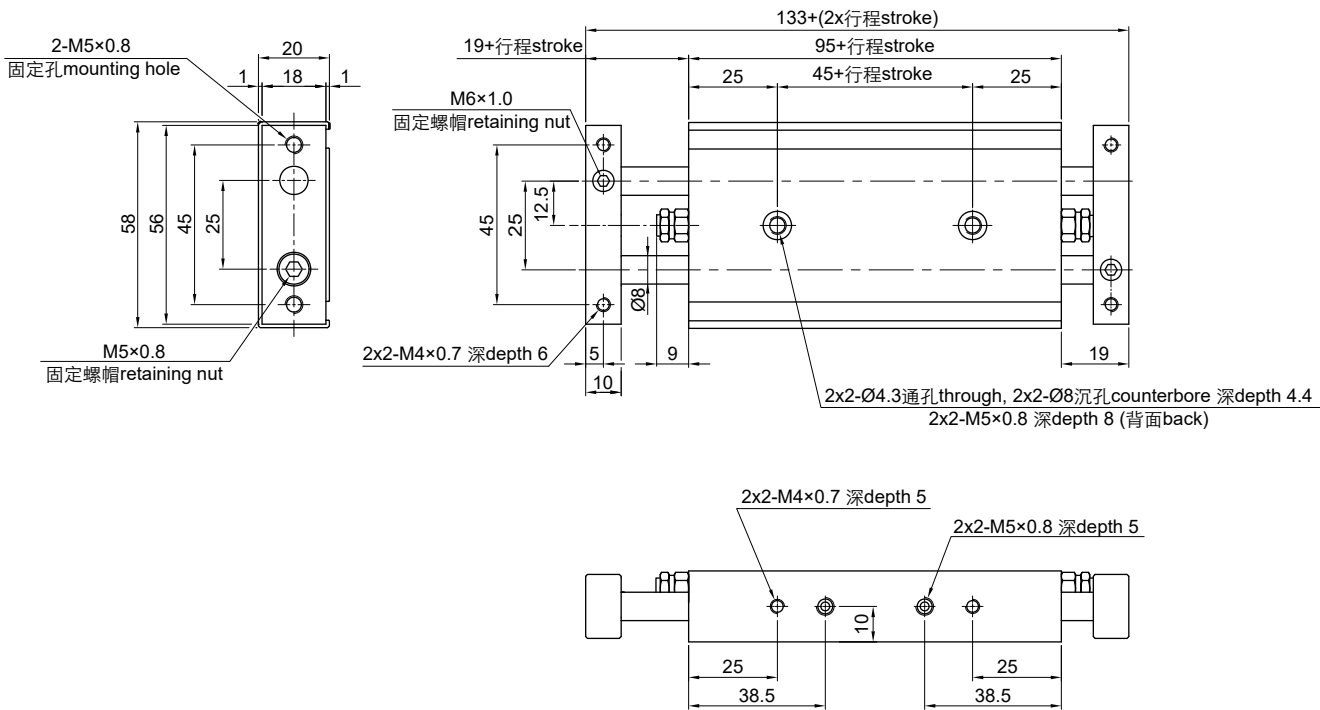


双轴型双缸气缸

Dual Rod Air Cylinder/ Double Rod

Series **KCXS**W

外形尺寸图 Dimensions (mm)

KCXSWM20

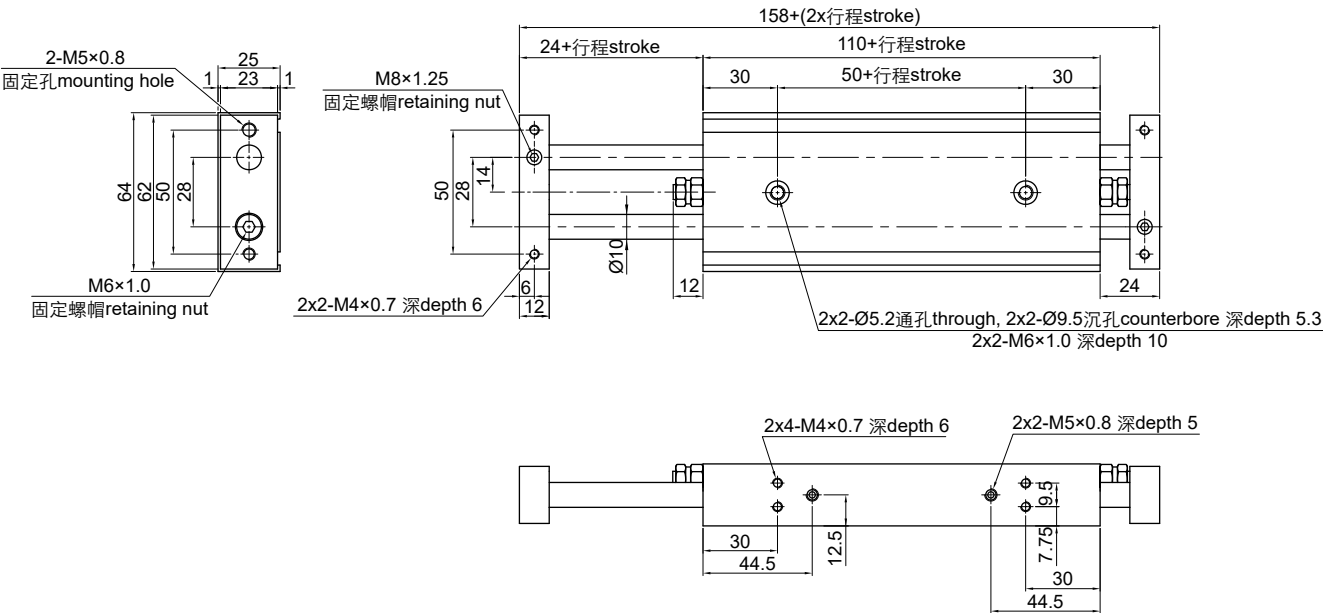

KCXSWM25

