


3通直动型电磁阀(微型)
3-Port Direct Operated Solenoid Valve
(Miniature)
Series **KGM215**




KGM215-M

规格 Specifications

型号 Model	KGM215
使用流体 Fluid	过滤压缩空气 Filtered compressed air
使用压力范围 Operating pressure range (MPa)	0~0.7
通径 Orifice (mm)	Ø1.6
环境及流体温度 Ambient and fluid temperature	-5~50°C (未冻结 No freezing)
响应时间 Response time (0.5 MPa)	10~12 ms
最大工作频率 Maximum working frequency	5 c/sec
* 润滑 Lubrication	不需要 Not required
额定电压 Rated voltage	DC12V, DC24V
容许电压波动范围 Permissible voltage variation	-5%~10% 额定电压 -5%~10% of rated voltage
功率消耗 Power consumption	2.3 W

* 如需润滑请使用透平 1 号油 ISO VG32#。Please use 1st Grade Turbine Oil ISO VG32# if necessary.

型号表示方法 How to Order

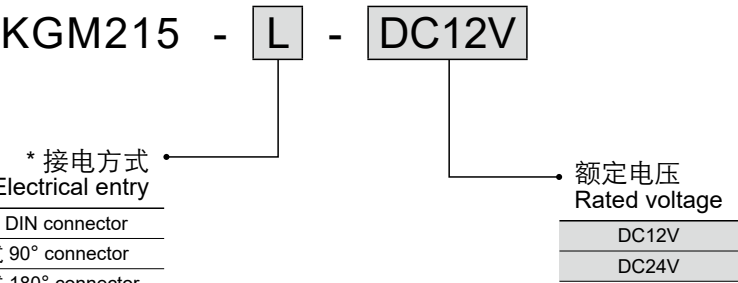

*电线型号GM-L10 长度1米, 可选择其他长度。
Cable model GM-L10, 1 m cable length, other length customized.


3通直动型电磁阀(微型)

3-Port Direct Operated Solenoid Valve (Miniature)


Series *KGM215*

外形尺寸图 Dimensions (mm)


KGM215-D

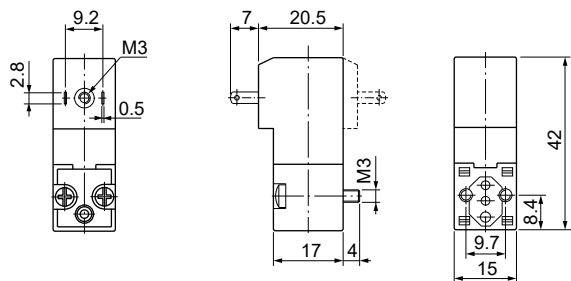


KGM215-M

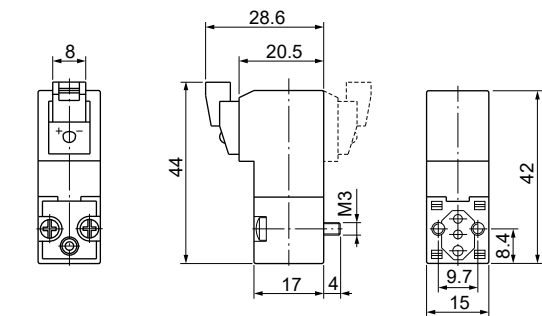

KGM215-L

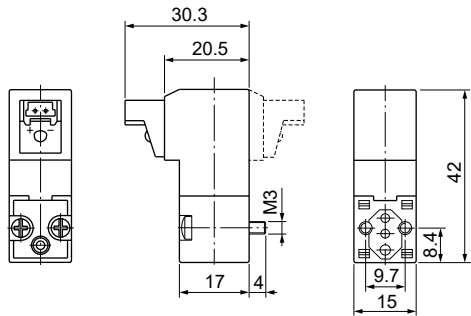

汇流板 Manifold

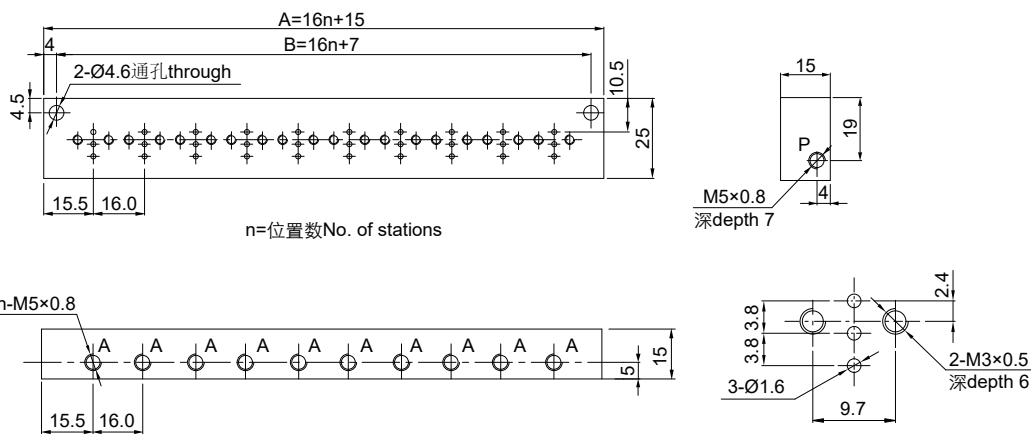

位置数 No. of stations n	2	3	4	5	6	7	8	9	10
A	47	63	79	95	111	127	143	159	175
B	39	55	71	87	103	119	135	151	167