




外形尺寸图 Dimensions (mm)

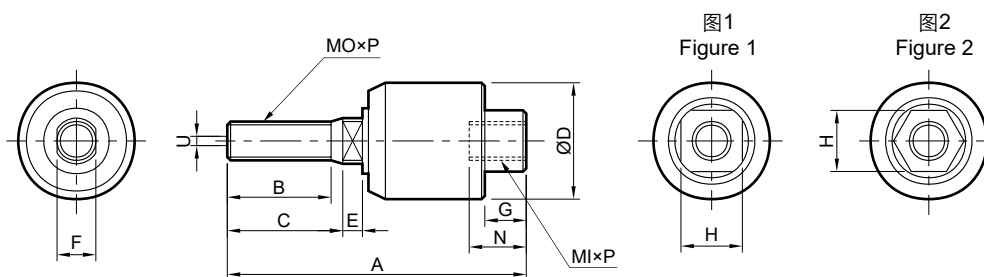


型号 Model	缸径 Bore	MI×P	MO×P	A	B	C	D	E	F	G	H	N	容许误差 Allowable tolerance U	图号 Figure No.	摇动角度 Rotation Angle
KJA-1003T	6	M3x0.5	M3x0.5	24.5	8	9	12	2	3	4	8	7	0.5	图 1 Figure 1	±5°
KJA-1004T	8	M4x0.7	M4x0.7	24.5	8	9	12	2	4	4	8	7	0.5		
KJA-1005T	10, 15	M5x0.8	M5x0.8	38	14	15	18	3	5	5	11	9	0.5		
KJA-1006T	15	M6x1.0	M6x1.0	38	14	15	18	3	6	5	11	9	0.5		
KJA-1008T	20	M8x1.25	M8x1.25	50	18	20	24	4	8	7	14	12	0.5		
KJA-1010T	25, 30	M10x1.25/1.5	M10x1.25/1.5	59	20	22	26	5	10	7	17	14	0.75		
KJA-1012T	40	M12x1.25/1.5/1.75	M12x1.25/1.5/1.75	57	20	22	28	5	12	8	19	12	0.75		
KJA-1014T	40	M14x1.5	M14x1.5	70	21	24	35	7	14	8	22	17	1		
KJA-1016T	50, 63	M16x1.5	M16x1.5	90	26	28	45	9	16	13	28	24	1.25		
KJA-1018T	50, 63	M18x1.5	M18x1.5	90	26	28	45	9	18	13	28	24	1.25		
KJA-1020T	80	M20x1.5	M20x1.5	103	30	32	55	10	20	16	32	27	2	图 2 Figure 2	
KJA-1022T	80	M22x1.5	M22x1.5	103	30	32	55	10	22	16	32	27	2		
KJA-1024T	100	M24x1.5	M24x1.5	124	35	38	61	12	24	19	41	33	2.5		
KJA-1026T	100	M26x1.5	M26x1.5	130	43	45	61	12	26	19	41	33	2.5		
KJA-1027T	125	M27x2.0	M27x2.0	153	63	65	63	20	27	19	41	33	2.5		
KJA-1030T	125, 140	M30x1.5/2.0/3.5	M30x1.5/2.0/3.5	153	57	59	63	20	30	18	41	33	3		
KJA-1036T	140, 160	M36x1.5/2.0	M36x1.5/2.0	195	80	82	75	18	36	22	50	41	4		
KJA-1040T	160	M40x2.0	M40x2.0	194	82	100	75	18	40	23	54	41	5		
KJA-1045T	160	M45x2.0	M45x2.0	205	78	95	85	14	45	33.5	64	50	5		
KJA-1050T	160	M50x2.0	M50x2.0	208	78	95	85	14	50	33.5	64	50	6		

* 容许气缸使用压力 <1MPa, 容许液压缸使用压力 <7MPa.
Allowable operating pressure of air cylinder < 1 MPa, that of hydraulic cylinder < 7 MPa.

浮动接头
Floating Joint
Series **KJAT, KJAF**

外形尺寸图 Dimensions (mm)

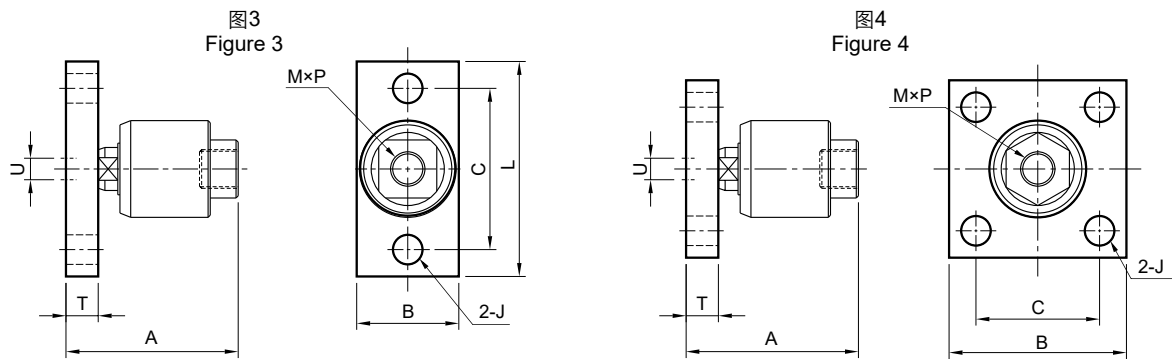

型号 Model	缸径 Bore	Ml×P	A	B	C	J	L	T	容许误差 Allowable tolerance U	图号 Figure No.	摇动角度 Rotation Angle
KJA-1008F	20	M8x1.25	38	25	40	7	52	6	0.5	图 3 Figure 3	±5°
KJA-1010F	25, 30	M10x1.25	46	32	44	7	56	9	0.75		
KJA-1012F	40	M12x1.25	46	32	44	7	56	9	0.75		
KJA-1014F	40	M14x1.5	61	38	60	11	80	12	1		
KJA-1016F	50, 63	M16x1.5	80	74	45	11	-	15	1.25	图 4 Figure 4	
KJA-1018F	50, 63	M18x1.5	80	74	45	11	-	15	1.25		
KJA-1020F	80	M20x1.5	91	100	62	14	-	18	1.25		
KJA-1022F	80	M22x1.5	91	100	62	14	-	18	1.25		
KJA-1024F	100	M24x1.5	108	100	70	14	-	21	2.5		
KJA-1026F	100	M26x1.5	108	100	70	14	-	21	2.5		
KJA-1027F	125	M27x2.0	111	100	70	14	-	21	2.5		
KJA-1030F	125, 140	M30x1.5	117	100	70	14	-	21	3		
KJA-1036F	140, 160	M36x1.5	140	130	95	16	-	25	4		

* 容许气缸使用压力 <1MPa，容许液压缸使用压力 <7MPa。
Allowable operating pressure of air cylinder < 1 MPa, hydraulic cylinder < 7 MPa.