


滑台气缸(小型) Air Slide Table (Compact) Series **KMXH** (Ø6~Ø20)



规格 Specifications


缸径 Bore size (mm)	6	10	16	20
接管口径 Port size Rc(PT)	M5x0.8			
使用流体 Fluid	过滤压缩空气 Filtered compressed air			
动作形式 Action	双动 Double acting			
使用压力范围 Operating pressure range (MPa)	0.15~0.7	0.06~0.7	0.05~0.7	
环境及流体温度 Ambient and fluid temperature	-5~60°C (未冻结 No freezing)			
活塞速度 Piston speed	50~500 mm/s			
缓冲 Cushion	橡胶缓冲 Rubber bumper			
* 润滑 Lubrication	不需要 Not required			

* 如需要润滑请使用透平 1 号油 ISOVG32。Please use Turbine oil 1st Grade ISOVG32 if necessary.

行程 / 磁性开关 Stroke/ Auto switch

缸径 Bore size (mm)	标准行程 Standard stroke (mm)	磁性开关 / 轨道安装 Auto switch/ rail mounting
6, 10, 16, 20	5, 10, 15, 20, 25, 30, 40, 50, 60	D-M9BK

型号表示方法 How to Order

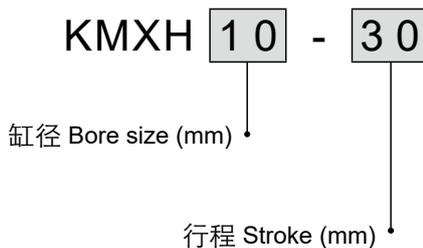


滑台气缸(小型)

Air Slide Table (Compact)

Series **KMXH**


外形尺寸图 Dimensions (mm)

KMXH6

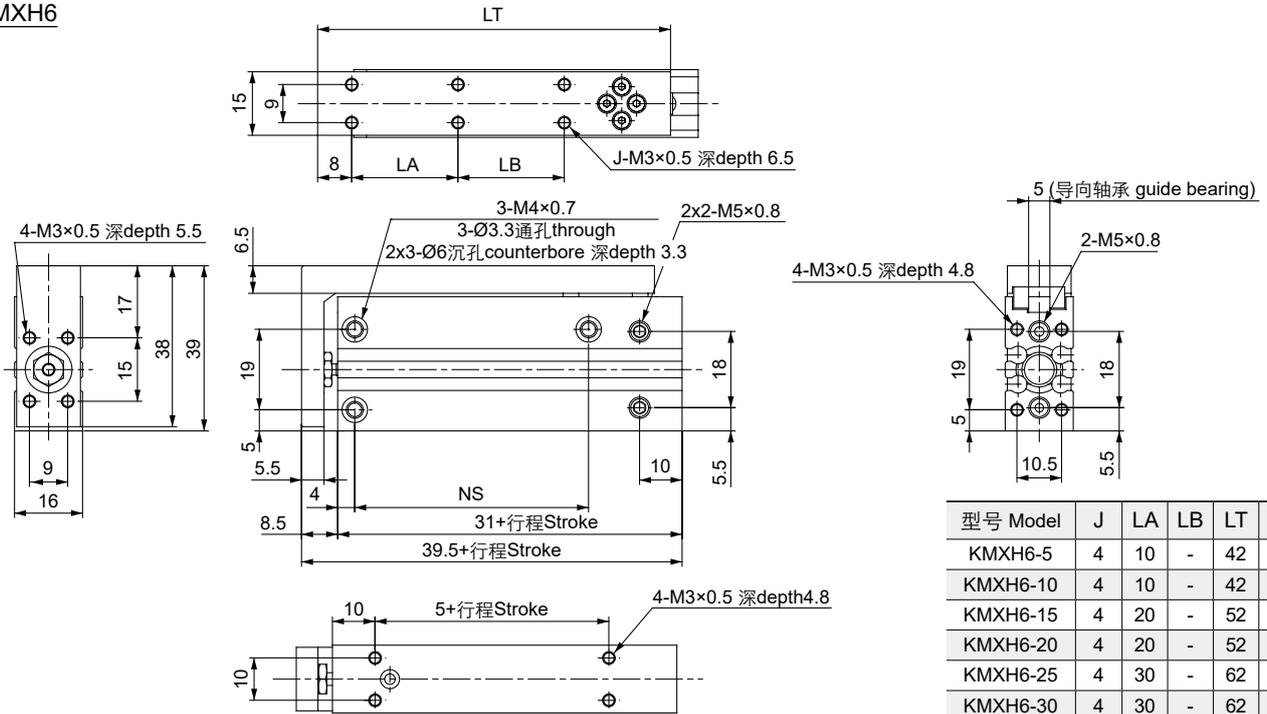

型号 Model	J	LA	LB	LT	NS
KMXH6-5	4	10	-	42	14
KMXH6-10	4	10	-	42	14
KMXH6-15	4	20	-	52	24
KMXH6-20	4	20	-	52	24
KMXH6-25	4	30	-	62	30
KMXH6-30	4	30	-	62	30
KMXH6-40	6	20	20	72	45
KMXH6-50	6	25	25	82	55
KMXH6-60	6	30	30	92	60

KMXH10

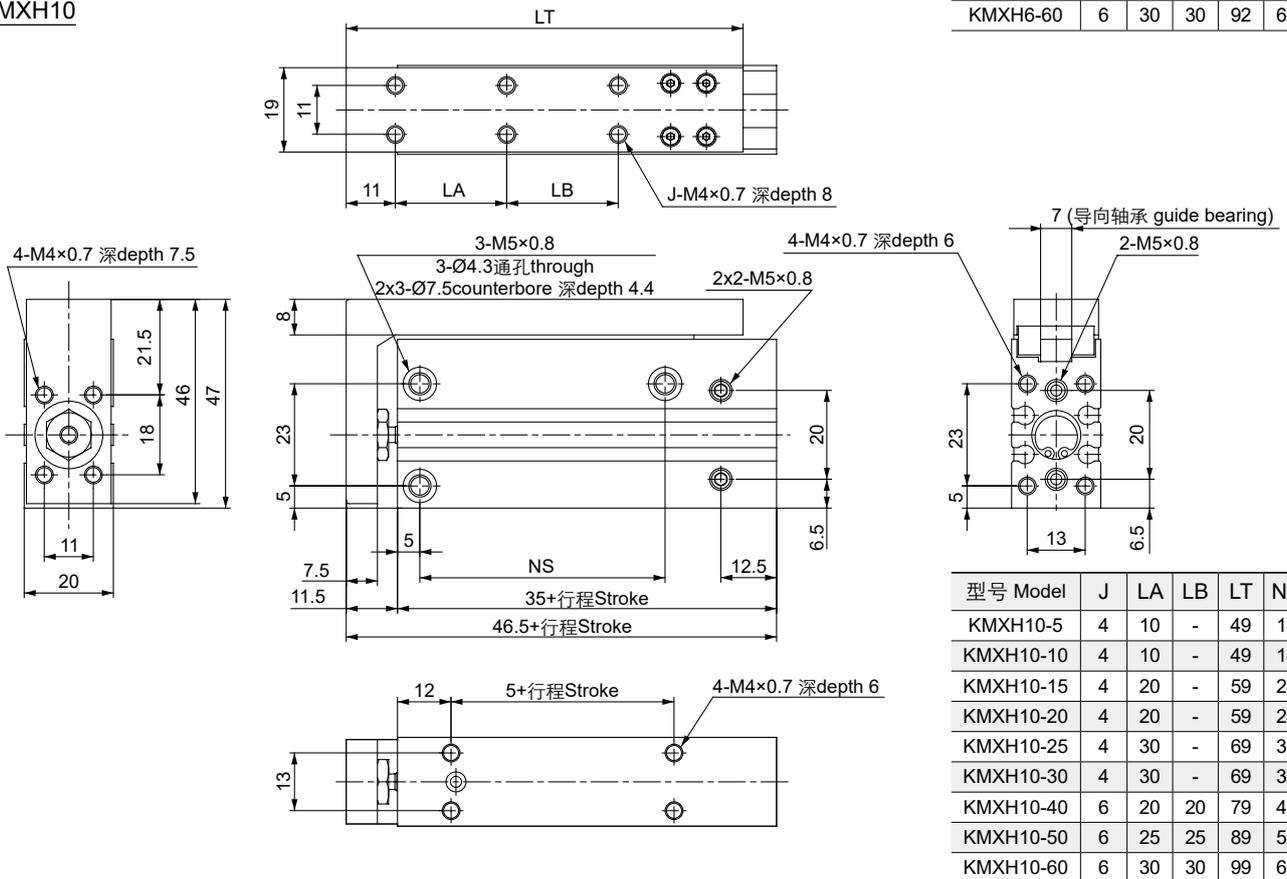


型号 Model	J	LA	LB	LT	NS
KMXH10-5	4	10	-	49	14
KMXH10-10	4	10	-	49	14
KMXH10-15	4	20	-	59	24
KMXH10-20	4	20	-	59	24
KMXH10-25	4	30	-	69	30
KMXH10-30	4	30	-	69	30
KMXH10-40	6	20	20	79	45
KMXH10-50	6	25	25	89	55
KMXH10-60	6	30	30	99	60

滑台气缸(小型) Air Slide Table (Compact) Series **KMXH**


外形尺寸图 Dimensions (mm)

KMXH16

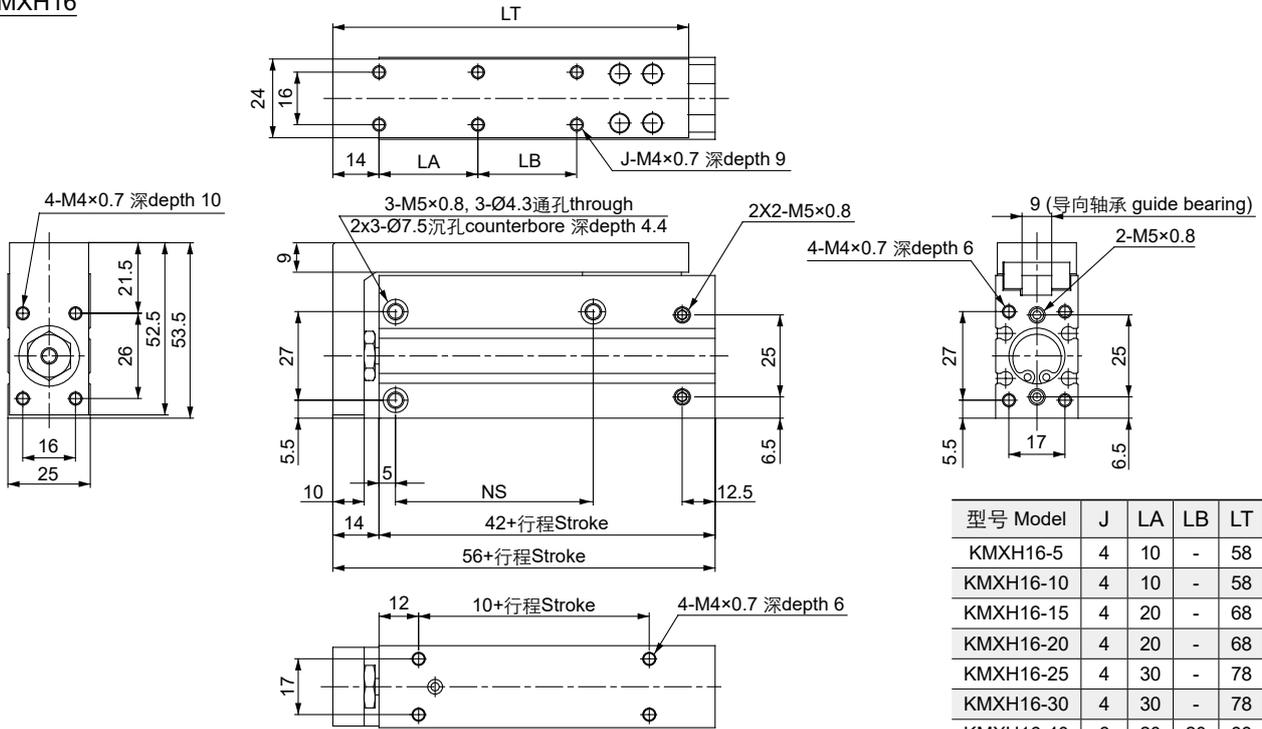

型号 Model	J	LA	LB	LT	NS
KMXH16-5	4	10	-	58	20
KMXH16-10	4	10	-	58	20
KMXH16-15	4	20	-	68	30
KMXH16-20	4	20	-	68	30
KMXH16-25	4	30	-	78	40
KMXH16-30	4	30	-	78	40
KMXH16-40	6	20	20	88	50
KMXH16-50	6	25	25	98	60
KMXH16-60	6	30	30	108	60

KMXH20

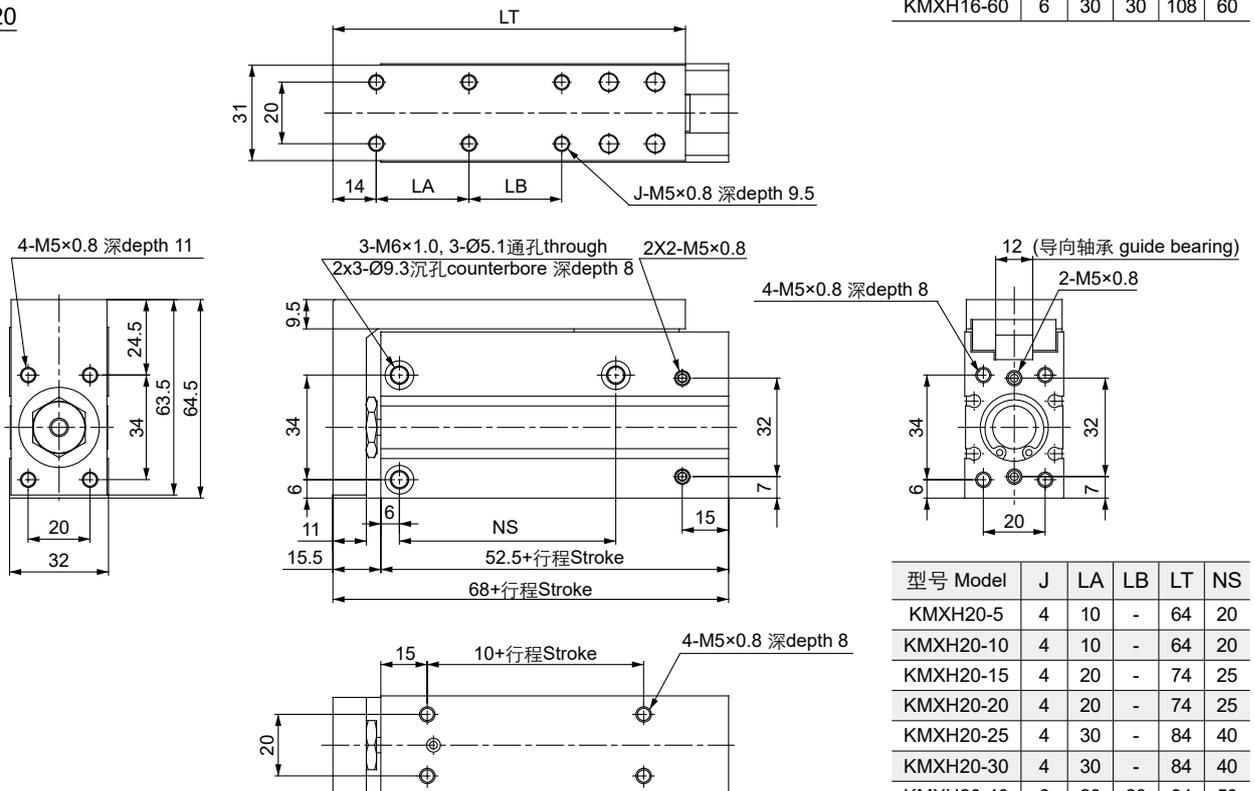

型号 Model	J	LA	LB	LT	NS
KMXH20-5	4	10	-	64	20
KMXH20-10	4	10	-	64	20
KMXH20-15	4	20	-	74	25
KMXH20-20	4	20	-	74	25
KMXH20-25	4	30	-	84	40
KMXH20-30	4	30	-	84	40
KMXH20-40	6	20	20	94	50
KMXH20-50	6	25	25	104	70
KMXH20-60	6	30	30	114	70