

规格 Specifications



型号 Model	接管口径 Port size	*2) 流体温度 Fluid temperature	设定压力范围 Setting pressure range (MPa)		压差调整范围 Regulating range of pressure difference (MPa)		初始设定值 Factory settings (MPa)		耐压力 Proof pressure (MPa)	安装 Mounting
			最低 Min.	最高 Max.	最低 Min.	最高 Max.	OFF (ON)	ON (OFF)		
KSNS-C103	*1) Rc(PT) 1/4	-10~120°C	-0.07	0.3	0.04	0.2	0.15	0.3	1.7	提供 安装板 Mounting bracket supplied
KSNS-C106			-0.07	0.6	0.06	0.4	0.3	0.2	1.7	
KSNS-C110			0.1	1.0	0.1	0.3	0.6	0.5	1.7	
KSNS-C120			0.5	2.0	0.2	0.4	1.2	1.05	3.3	
KSNS-C130			0.5	3.0	0.5	1.0	2.0	1.5	3.3	

*1) 可另外选择英制螺纹 (7/16~20UNF), 型号后加注 "-N".



Inch thread (7/16~20UNF) available with "-N" added after the order number.

2) 可使用在气压或液压冷冻冷却装置。Can be used in pneumatic or hydraulic refrigerating installations.


电气规格 Electrical Specifications

额定电压 Rated voltage (V)	COSØ	125/250 VAC
额定电流 Rated current (A)	1	12
感应电流 Inductive current (A)	0.75	12
	0.45	72


外形尺寸图 Dimensions (mm)

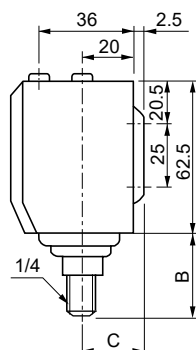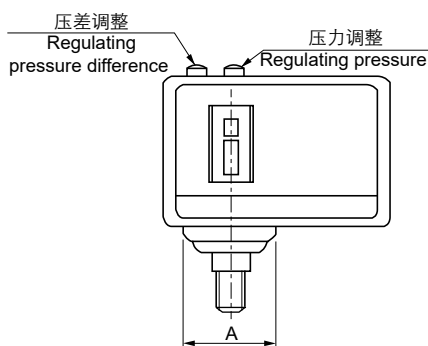


触点形式 Contact Form



1	共接端 Common terminal
3	压力上升接点 Close on pressure increase
5	压力下降接点 Close on pressure decrease

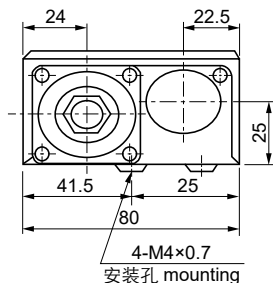

安装板 Mounting Bracket

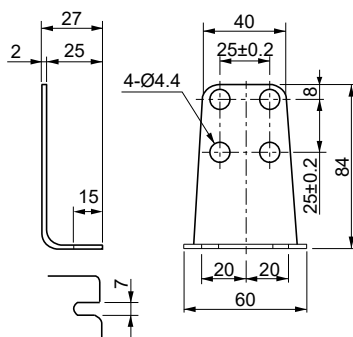

型号 Model	A	B	C
KSNS-C103	38.5	38.9	22.4
KSNS-C106	34.4	36	22.4
KSNS-C110			
KSNS-C120	22	32.7	18.5
KSNS-C130			