


3通直动型电磁阀
3-Port Direct Operated
Solenoid Valve
Series **KSV110**




KSV111-5D

规格 Specifications

型号 Model	KSV111	KSV112
切换方式 Actuation	常闭 N.C.	常开 N.O.
使用流体 Fluid	过滤压缩空气 Filtered compressed air	
接管口径 Port size	Rc(PT) 1/8	
使用压力范围 Operating pressure range (MPa)	0~0.8	
通径 Orifice (mm)	P=Ø1.5, R=Ø1.5	
环境及流体温度 Ambient and fluid temperature	5~60°C	
响应时间 Response time (0.5 MPa)	≤ 20 ms	
最大工作频率 Maximum working frequency	8 c/sec	
* 润滑 Lubrication	不需要 Not required	
手动方式 Manual override	按钮无锁定 (标准), 旋转锁定 (可选) Push button non-locking (standard), lever locking (option)	
额定电压 Rated voltage	AC110V, AC220V (50/60 Hz), DC12V, DC24V	
容许电压波动范围 Permissible voltage variation	±10% 额定电压 ±10% of rated voltage	
线圈绝缘等级 Coil insulation class	F 或同等级 Class F or equivalent	
功率消耗 Power consumption	AC	持续 Holding 3.5 VA (50/60 Hz)
	DC	2.5 W

* 如需润滑请使用透平 1 号油 ISO VG32#。Please use 1st Grade Turbine Oil ISO VG32# if necessary.

型号表示方法 How to Order

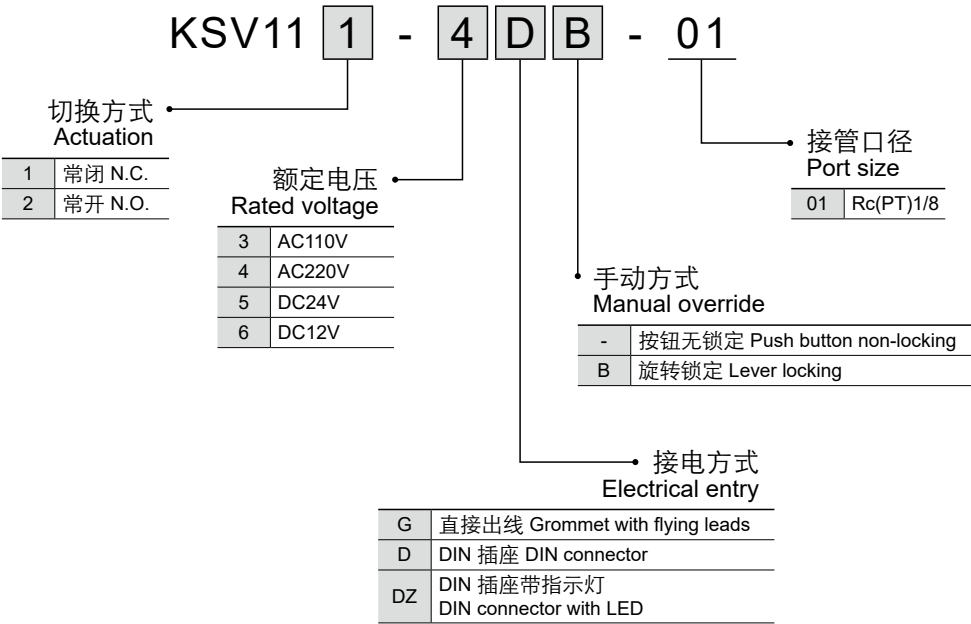


3通直动型电磁阀

3-Port Direct Operated Solenoid Valve


Series KSV110

外形尺寸图 Dimensions (mm)


KSV111-G/KSV112-G

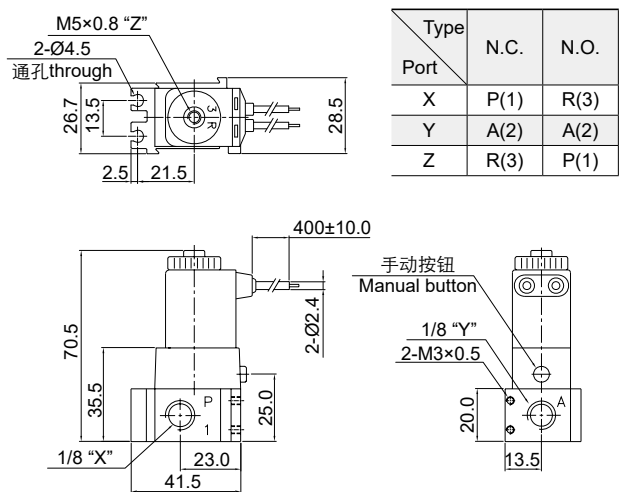

KSV111-D(DZ)/KSV112-D(DZ)

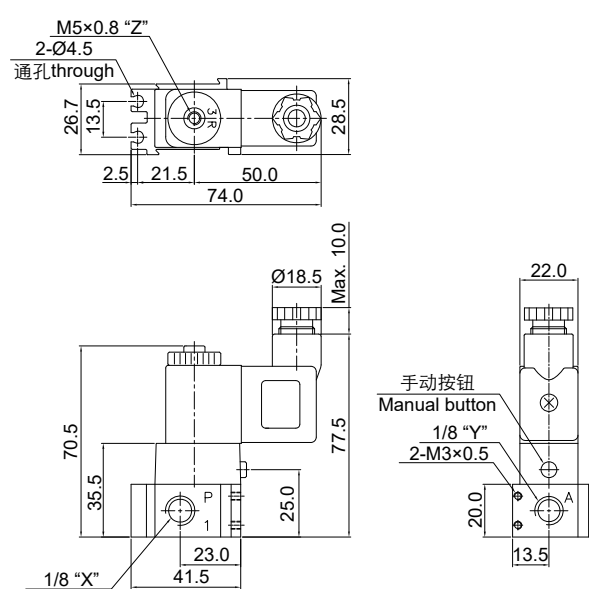

2 汇流板 Manifold

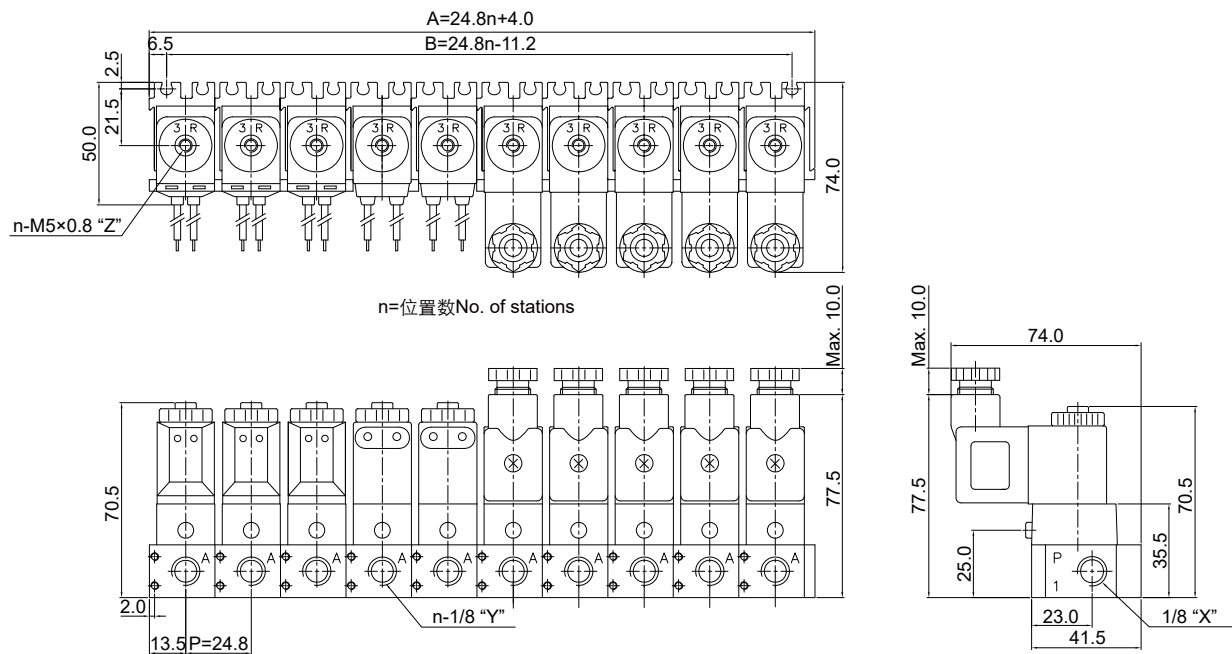

位置数 No. of stations n	2	3	4	5	6	7	8	9	10
A	53.6	78.4	103.2	128	152.8	177.6	202.4	227.2	252
B	38.4	63.2	88	112.8	137.6	162.4	187.2	212	236.8