


10mm 3通直动型电磁阀
10mm 3-Port Direct Operated
Solenoid Valve
Series **KSV150**




KSV151-L

规格 Specifications

型号 Model	KSV151	KSV152
	3/2-N.C.	3/2-N.O.
使用流体 Fluid	过滤压缩空气 Filtered compressed air	
使用压力范围 Operating pressure range (MPa)	0~0.75	
通径 Orifice (mm)	P=Ø0.7, R=Ø1.0 (标准 Standard) P=Ø0.9, R=Ø1.0 (可选 Option)	
环境及流体温度 Ambient and fluid temperature	0~60°C	
响应时间 Response time (0.5 MPa)	≤ 5 ms	
润滑 Lubrication	不需要 Not required	
最大工作频率 Maximum operating frequency	30 c.p.s	
手动方式 Manual override	按钮 Push button	
额定电压 Rated voltage	DC12V, DC24V	
容许电压波动范围 Permissible voltage variation	± 10% 额定电压 ± 10% of rated voltage	
线圈绝缘类型 Coil insulation type	等同 F 级 Equivalent to Class F	
功率消耗 Power consumption	0.6 W, 0.8 W	

型号表示方法 How to Order

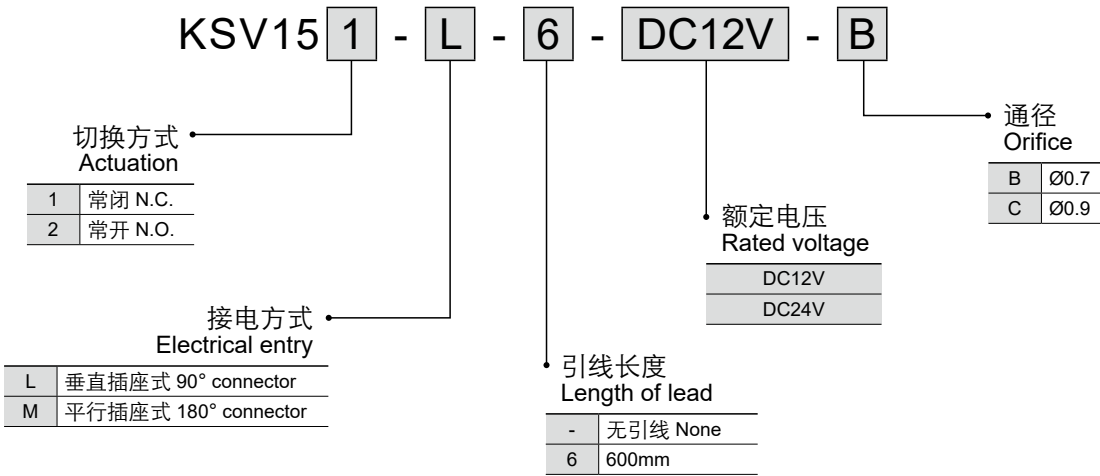


10mm 3通直动型电磁阀

10mm 3-Port Direct Operated Solenoid Valve


Series KSV150

外形尺寸图 Dimensions (mm)

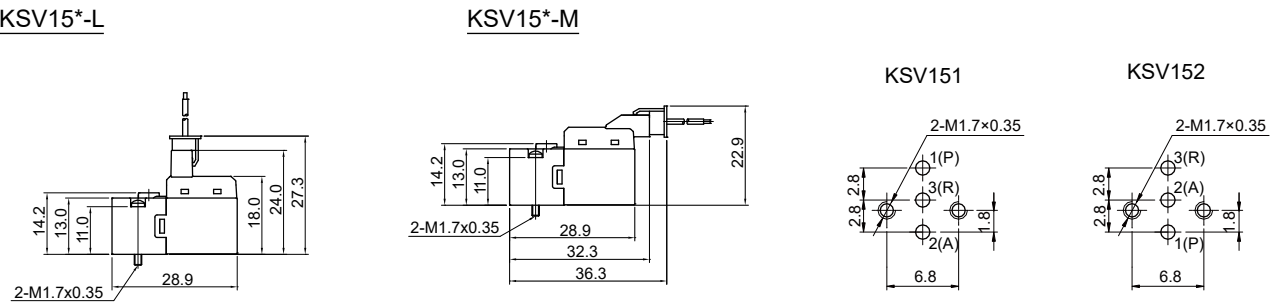

汇流板 Manifold

2

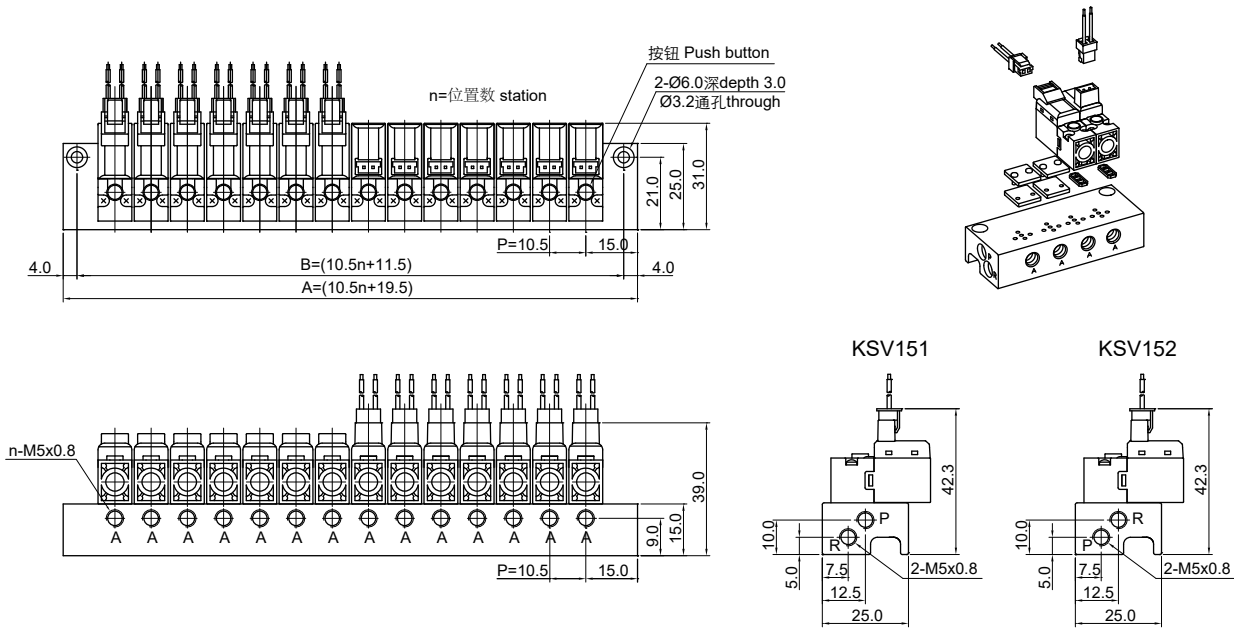

位置数 No. of stations n	2	3	4	5	6	7	8	9	10	11	12	13	14
A	40.5	51	61.5	72	82.5	93	103.5	114	124.5	135	145.5	156	166.5
B	32.5	43	53.5	64	74.5	85	95.5	106	116.5	127	137.5	148	158.5