


5通气控阀 5-Port Air Operated Valve Series KVFA3000



KVFA3130



KVFA3230

规格 Specifications

型号 Model	KVFA3130	KVFA3230	KVFA3330	KVFA3430	KVFA3530
使用流体 Fluid	过滤压缩空气 Filtered compressed air				
接管口径 Port size	Rc(PT)1/4				
气控孔口径 Pilot port size	Rc(PT)1/8				
使用压力范围 Operating pressure range (MPa)	0.15~1.0		0.2~1.0		
有效截面积 Effective sectional area (mm²)	19.0		11.5		
环境及流体温度 Ambient and fluid temperature	5~60℃				
* 润滑 Lubrication	不需要 Not required				

* 如需润滑请使用透平 1 号油 ISO VG32#. Please use 1st Grade Turbine Oil ISO VG32# if necessary.

型号表示方法 How to Order

KVFA 3 **1** 3 0 - 02

结构 Configuration


1	单气控 Single
2	双气控 Double
3	3 位 / 中央封闭 3-position/ closed center
4	3 位 / 中央排气 3-position/ exhaust center
5	3 位 / 中央加压 3-position/ pressure center

接管口径 Port size


02	Rc(PT)1/4
----	-----------

外形尺寸图 Dimensions (mm)

KVFA3130

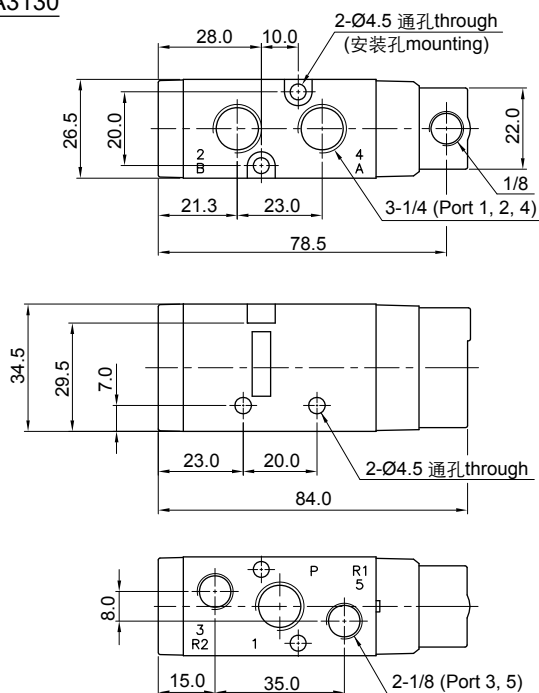

KVFA3230

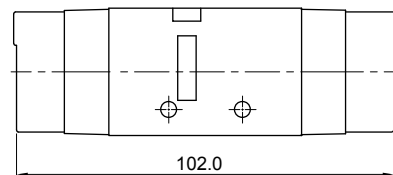

KVFA33(4, 5)30

