


ISO-1规格5通气控阀 (底座配管型)

ISO-1 5-Port Air Operated Valve (Base Ported)

Series KVFA6040



KVFA6140



KVFA6240

规格 Specifications

型号 Model	KVFA6140	KVFA6240	KVFA6340	KVFA6440	KVFA6540
使用流体 Fluid	过滤压缩空气 Filtered compressed air				
接管口径 Port size	Rc(PT)3/8, Rc(PT)1/2				
气控孔口径 Pilot port size	Rc(PT)1/8				
使用压力范围 Operating pressure range (MPa)	0.15~1.0		0.2~1.0		
有效截面积 Effective sectional area (mm ²)	30.0		25.0		
环境及流体温度 Ambient and fluid temperature	5~60℃				
* 润滑 Lubrication	不需要 Not required				

* 如需润滑请使用透平 1 号油 ISO VG32#. Please use 1st Grade Turbine Oil ISO VG32# if necessary.

型号表示方法 How to Order

KVFA 6 **1** 4 0 - 04

结构 Configuration


1	单气控 Single
2	双气控 Double
3	3 位 / 中央封闭 3-position/ closed center
4	3 位 / 中央排气 3-position/ exhaust center
5	3 位 / 中央加压 3-position/ pressure center

接管口径 Port size


03	Rc(PT)3/8
04	Rc(PT)1/2

外形尺寸图 Dimensions (mm)


KVFA6140

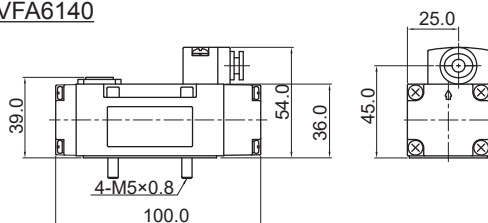


KVFA6240



KVFA63(4, 5)40

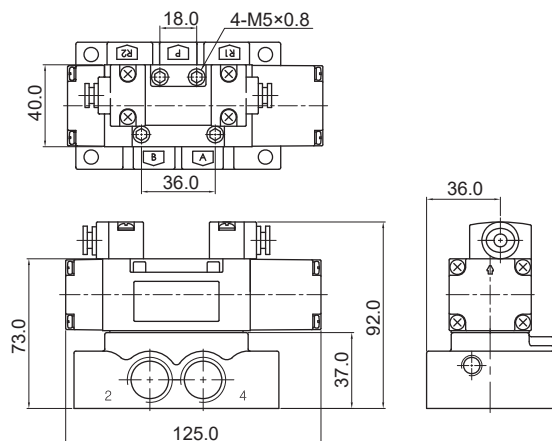

底座 Base

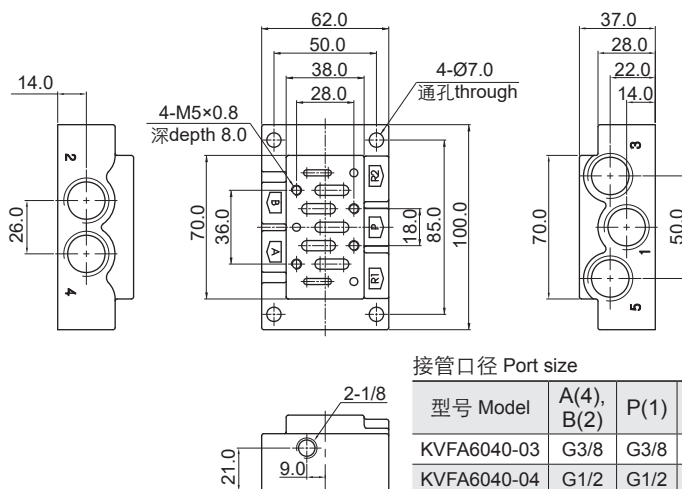

接管口径 Port size

型号 Model	A(4), B(2)	P(1)	R1(5), R2(3)
KVFA6040-03	G3/8	G3/8	G3/8
KVFA6040-04	G1/2	G1/2	G1/2