


ARK

ISO-2规格5通气控阀 (底座配管型)

ISO-2 5-Port Air Operated Valve (Base Ported)

Series KVFA7040



KVFA7140



KVFA7240

规格 Specifications

型号 Model	KVFA7140	KVFA7240	KVFA7340	KVFA7440	KVFA7540
使用流体 Fluid	过滤压缩空气 Filtered compressed air				
接管口径 Port size	Rc(PT)3/8, Rc(PT)1/2, Rc(PT)3/4				
气控孔口径 Pilot port size	Rc(PT)1/8				
使用压力范围 Operating pressure range (MPa)	0.15~1.0		0.2~1.0		
有效截面积 Effective sectional area (mm²)	65.0		50.0		
环境及流体温度 Ambient and fluid temperature	5~60°C				
* 润滑 Lubrication	不需要 Not required				

* 如需润滑请使用透平 1 号油 ISO VG32#. Please use 1st Grade Turbine Oil ISO VG32# if necessary.

型号表示方法 How to Order

KVFA 7 1 4 0 - 06

结构 Configuration


1	单气控 Single
2	双气控 Double
3	3 位 / 中央封闭 3-position/ closed center
4	3 位 / 中央排气 3-position/ exhaust center
5	3 位 / 中央加压 3-position/ pressure center

接管口径 Port size


03	Rc(PT)3/8
04	Rc(PT)1/2
06	Rc(PT)3/4

外形尺寸图 Dimensions (mm)


KVFA7140

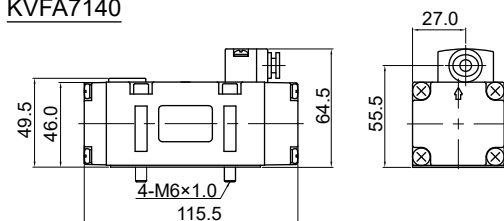


KVFA7240



KVFA73(4, 5)40

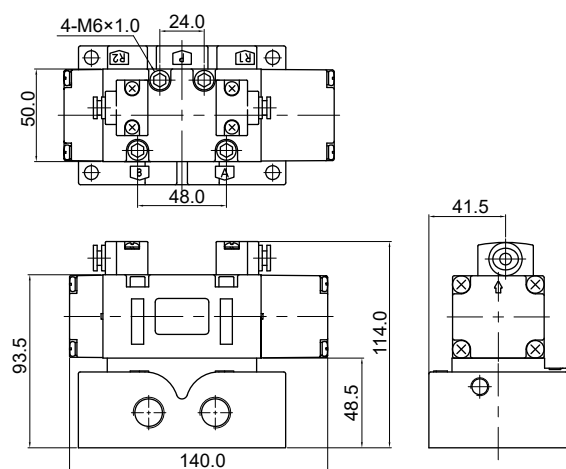

底座 Base

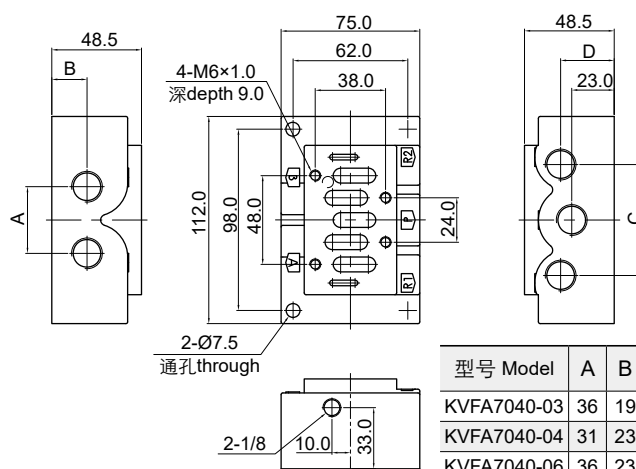

型号 Model	A	B	C	D
KVFA7040-03	36	19	60	29
KVFA7040-04	31	23	63.2	32
KVFA7040-06	36	23	67.2	26.3