


# ARK

## ISO-3规格5通气控阀 (底座配管型)

## ISO-3 5-Port Air Operated Valve (Base Ported) Series **KVFA8040**



KVFA8140



KVFA8240

### 规格 Specifications

型号 Model	KVFA8140	KVFA8240	KVFA8340	KVFA8440	KVFA8540
使用流体 Fluid	过滤压缩空气 Filtered compressed air				
接管口径 Port size	Rc(PT)3/4, Rc(PT)1				
气控孔口径 Pilot port size	Rc(PT)1/8				
使用压力范围 Operating pressure range (MPa)	0.2~1.0		0.25~1.0		
有效截面积 Effective sectional area (mm <sup>2</sup> )	90.0		70.0		
环境及流体温度 Ambient and fluid temperature	5~60°C				
* 润滑 Lubrication	不需要 Not required				

\* 如需润滑请使用透平 1 号油 ISO VG32#. Please use 1st Grade Turbine Oil ISO VG32# if necessary.

### 型号表示方法 How to Order

KVFA 8 **1** 40 - 06

结构 Configuration


1	单气控 Single
2	双气控 Double
3	3 位 / 中央封闭 3-position/ closed center
4	3 位 / 中央排气 3-position/ exhaust center
5	3 位 / 中央加压 3-position/ pressure center

接管口径  
Port size


06	Rc(PT)3/4
10	Rc(PT)1

### 外形尺寸图 Dimensions (mm)

KVFA8140



KVFA83(4, 5)40

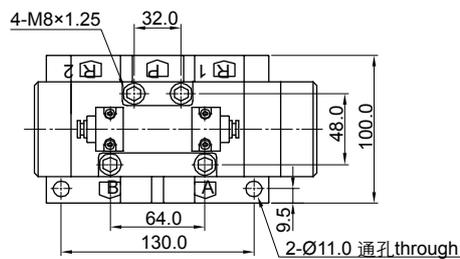

型号 Model	A	B
KVFA8040-06	42.5	84
KVFA8040-10	50	90

KVFA8240

