


3通直动型电磁阀 3-Port Direct Operated Solenoid Valve Series KVT307



KVT307-5GZ


规格 Specifications

型号 Model	KVT307	
使用流体 Fluid	过滤压缩空气 Filtered compressed air	
结构 Configuration	2 位 3 通常闭 / 常开 3/2-way N.C. / N.O.	
接管口径 Port size	Rc(PT) 1/4	
使用压力范围 Operating pressure range (MPa)	0~0.7	
环境及流体温度 Ambient and fluid temperature	-10~50°C (未冻结 No freezing)	
响应时间 Response time (0.5 MPa)	≤ 20 ms	
最大工作频率 Maximum working frequency	10 c/sec	
* 润滑 Lubrication	不需要 Not required	
手动方式 Manual override	按钮无锁定 Push button non-locking	
额定电压 Rated voltage	AC110V, AC220V (50/60 Hz), DC12V, DC24V	
容许电压波动范围 Permissible voltage variation	-15%~10% 额定电压 -15%~10% of rated voltage	
线圈绝缘等级 Coil insulation class	F 或同等级 Class F or equivalent	
功率消耗 Power consumption	AC	持续 Holding 5.0 VA (50/60 Hz)
	DC	4.0 W

* 如需润滑请使用透平 1 号油 ISO VG32#。Please use 1st Grade Turbine Oil ISO VG32# if necessary.

2

型号表示方法 How to Order

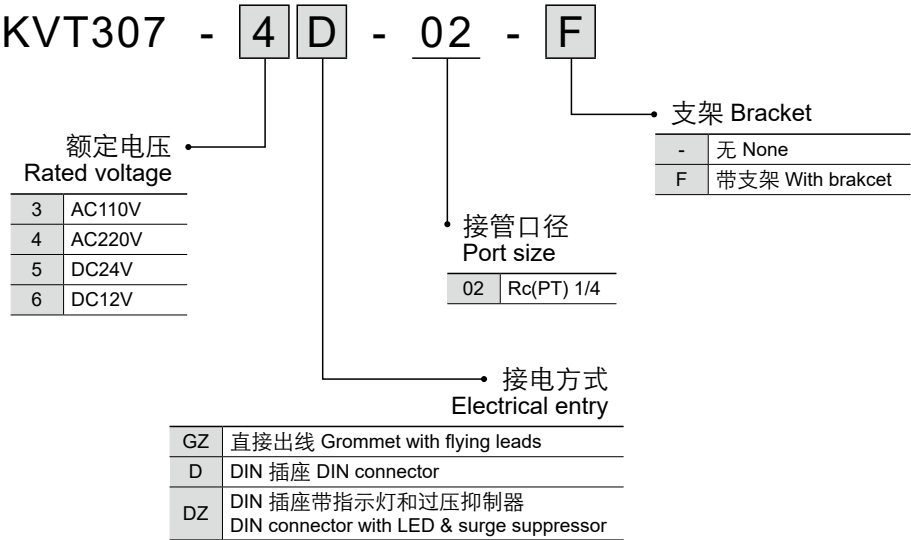

3通直动型电磁阀

3-Port Direct Operated Solenoid Valve

Series *KVT307*

外形尺寸图 Dimensions (mm)

