



特性 Features


- 杆端为右旋 (PHS) 或左旋 (PHSL) 的内螺纹连接。
Right-hand (PHS) or left hand (PHSL) female thread connection at rod end.
- 外圈球面镶青铜衬垫。
Outer race lined with bronze liner.
- 杆端体表面镀锌, 有润滑油孔或注油嘴。
Surface of rod body zinc plated, rod body with a lubricating hole or grease nipple.

型号表示方法 How to Order

外形尺寸图 Dimensions (mm)

PHS 25 - M24x2.0

型号
Model

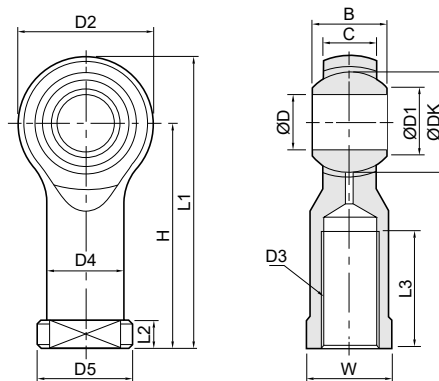

型号 Model	B	C	D	D1	D2	D3	D4	D5	DK	H	L1	L2	L3	W	负荷 Load (KN)	
															动态 Dynamic	静态 Static
PHS 4-M4x0.7	7	5.25	4	6.5	16	M4×0.7	8	9.5	9.525	24	31	4	8	8	3.0	5.0
PHS 5-M5x0.8	8	6	5	7.70	18	M5×0.8	8.5	11	11.11	27	35	4	10	9	3.25	5.70
PHS 6-M6x1.0	9	6.75	6	8.96	20	M6×1.0	10	13	12.70	30	39	5	12	11	4.3	7.20
PHS 8-M8x1.25	12	9	8	10.4	24	M8×1.25	12.5	16	15.875	36	47	5	16	14	7.2	11.6
PHS 10-M10x1.5	14	10.5	10	12.9	28	M10×1.5	15	19	19.05	43	56	6.5	20	17	10	14.5
PHS 10-M10x1.25	14	10.5	10	12.9	28	M10×1.25	15	19	19.05	43	56	6.5	20	17	10	14.5
PHS 12-M12x1.75	16	12	12	15.4	32	M12×1.75	17.5	22	22.225	50	65	6.5	22	19	13.4	17
PHS 12-M12x1.25	16	12	12	15.4	32	M12×1.25	17.5	22	22.225	50	65	6.5	22	19	13.4	17
PHS 14-M14x2.0	19	13.5	14	16.9	36	M14×2.0	20	25	25.40	57	74	8	25	22	17	24
PHS 14-M14x1.5	19	13.5	14	16.9	36	M14×1.5	20	25	25.40	57	74	8	25	22	17	24
PHS 16-M16x2.0	21	15	16	19.4	40	M16×2.0	22	27	28.575	64	84	8	28	22	21.6	28.5
PHS 16-M16x1.5	21	15	16	19.4	40	M16×1.5	22	27	28.575	64	84	8	28	22	21.6	28.5
PHS 18-M18x1.5	23	16.5	18	21.9	44	M18×1.5	25	31	31.75	71	93	10	32	27	26	42.5
PHS 20-M20x1.5	25	18	20	24.4	46	M20×1.5	27.5	34	34.925	77	100	10	33	30	31.5	42.5
PHS 22-M22x1.5	28	20	22	25.8	54	M22×1.5	30	38	38.10	84	111	12	37	32	38	57
PHS 25-M24x2.0	31	22	25	29.6	60	M24×2.0	33.5	42	42.86	94	124	12	42	36	47.5	68
PHS 28-M27x2.0	35	24	28	32.3	66	M27×2.0	37	46	47.63	103	136	14	48	41	58	75
PHS 30-M30x2.0	37	25	30	34.8	70	M30×2.0	40	50	50.8	110	145	15	51	41	64	88