


ARK

三联件 (空气过滤器+调压阀+油雾器)

Air Filter + Regulator + Lubricator

Series KAC 2000~6000



KAC3000

规格 Specifications


型号 Model	KAC 2000~6000
使用流体 Fluid	压缩空气 Compressed air
保证耐压力 Proof pressure	1.5 MPa
最高使用压力 Maximum operating pressure	1.0 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C
过滤精度 Filtration	10 μm
建议润滑油 Recommended lubricant	透平 1 号油 Turbine oil 1st Grade ISOVG32
滤杯材料 Bowl material	聚碳酸酯 Polycarbonate
调压范围 Regulating pressure range	0.05~0.85 MPa
调压阀型结构 Construction of regulator	带溢流型 Relieving type

型号 Model		组件 Components			规格 Specifications				配件 Accessories			
手动排水 Manual drain	自动排水 Auto drain	空气过滤器 Air filter	调压阀 Regulator	油雾器 Lubricator	* 额定 流量 Flow rate (l/min)	接管 口径 Port size Rc(PT)	压力表口径 Port size of gauge Rc(PT)	质量 Weight (kg)	支架 (2 件) Bracket (2 pcs.)	压力表 (任选) Gauge (Option)	自动排水器 浮子 Auto drain float	滤杯 防护罩 Bowl guard
KAC2000-02	KAC2000-02D	KAF2000	KAR2000	KAL2000	500	1/4	1/8	0.74	B210T	KG40-10-01		
KAC3000-03	KAC3000-03D	KAF3000	KAR3000	KAL3000	2000	3/8	1/8	1.18	B310L		SAD300	
KAC4000-04	KAC4000-04D	KAF4000	KAR4000	KAL4000	4000	1/2	1/4	2.14	B410L	KG50-10-02	SAD400	有 Equipped
KAC4000-06	KAC4000-06D	KAF4000	KAR4000	KAL4000	4500	3/4	1/4	2.47	B510L		SAD400	
KAC6000-06	KAC6000-06D	KAF6000	KAR6000	KAL6000	6000	3/4	1/4	3.82	B610L		SAD400	
KAC6000-10	KAC6000-10D	KAF6000	KAR6000	KAL6000	6000	1	1/4	3.82	B610L		SAD400	


* 额定流量指进气压力为 0.7MPa 的条件下。Flow rate is at supply pressure 0.7 MPa.

外形尺寸图 Dimensions (mm)

KAC2000

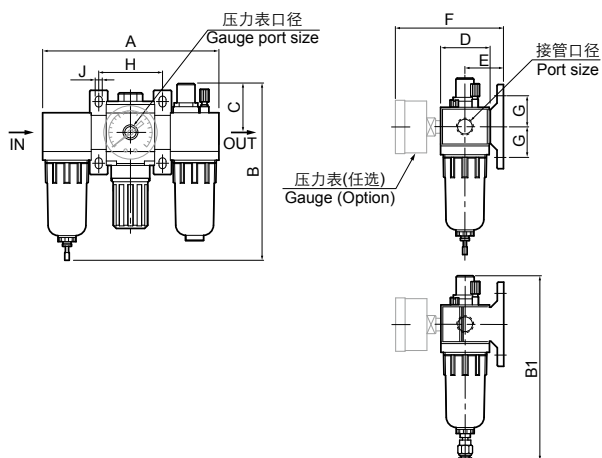

KAC3000~6000

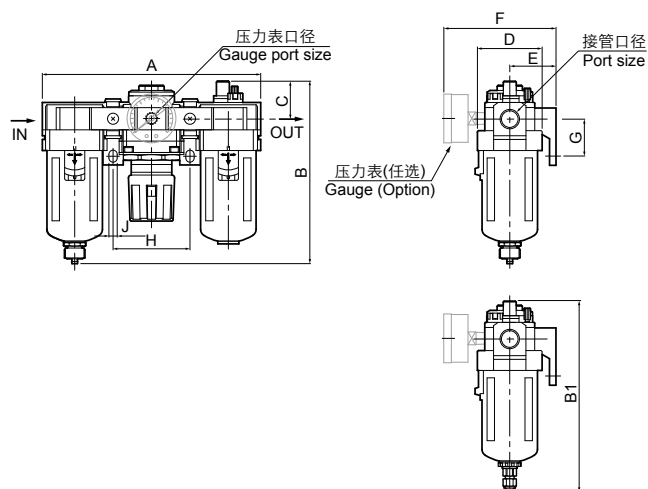

型号 Model	接管口径 Port size Rc(PT)	A	手动排水 Manual drain	自动排水 Auto drain	C	D	E	F	G	H	J
			B	B1							
KAC2000-02	1/4	138	139	146	38	38	30	74	24	50	5.5
KAC3000-03	3/8	181	163	170	38	53	41	102	35	64	7
KAC4000-04	1/2	238	197	204	41	70	50	120	40	84	9
KAC4000-06	3/4	252	201	208	41	70	50	150	40	89	8.5
KAC6000-06/10	3/4, 1	300	293	300	48	90	70	150	50	105	12