


二联件 (过滤器带调压阀+油雾器) Filter Regulator + Lubricator Series KAC 2010~6010



KAC3010

规格 Specifications

型号 Model	KAC 2010~6010
使用流体 Fluid	压缩空气 Compressed air
保证耐压力 Proof pressure	1.5 MPa
最高使用压力 Maximum operating pressure	1.0 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C
过滤精度 Filtration	10 μm
建议润滑油 Recommended lubricant	透平 1 号油 Turbine oil 1st Grade ISOVG32
滤杯材料 Bowl material	聚碳酸酯 Polycarbonate
调压范围 Regulating pressure range	0.05~0.85 MPa
调压阀型结构 Construction of regulator	带溢流型 Relieving type



型号 Model		组件 Components		规格 Specifications				配件 Accessories			
手动排水 Manual drain	自动排水 Auto drain	过滤器带调压阀 Filter Regulator	油雾器 Lubricator	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)	压力表口径 Port size of gauge Rc(PT)	质量 Weight (kg)	支架 Bracket	压力表 (任选) Gauge (Option)	自动排水器浮子 Auto drain float	滤杯防护罩 Bowl guard
KAC2010-02	KAC2010-02D	KAW2000	KAL2000	500	1/4	1/8	0.66	B210T	KG40-10-01		
KAC3010-03	KAC3010-03D	KAW3000	KAL3000	1700	3/8	1/8	0.98	B310T		SAD300	
KAC4010-04	KAC4010-04D	KAW4000	KAL4000	3000	1/2	1/4	1.93	B410T	KG50-10-02	SAD400	有 Equipped
KAC6010-06	KAC6010-06D	KAW6000	KAL6000	4500	3/4	1/4	3.82	B610T		SAD400	
KAC6010-10	KAC6010-10D	KAW6000	KAL6000	4500	1	1/4	3.82	B610T		SAD400	

* 额定流量指进气压力为 0.7MPa 的条件下。Flow rate is at supply pressure 0.7 MPa.

外形尺寸图 Dimensions (mm)

KAC2010

KAC3010~6010

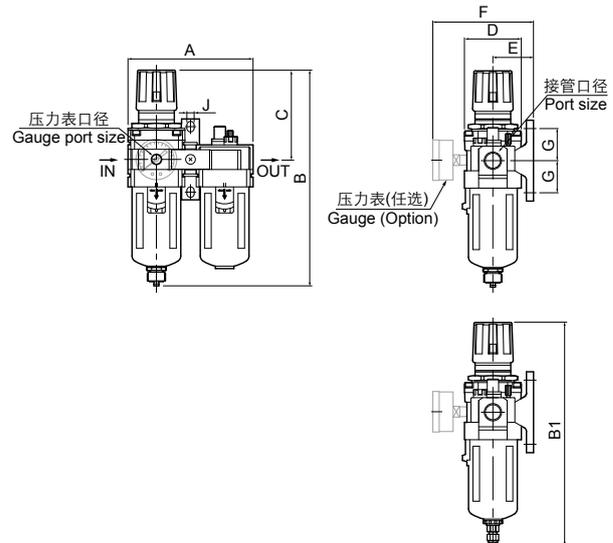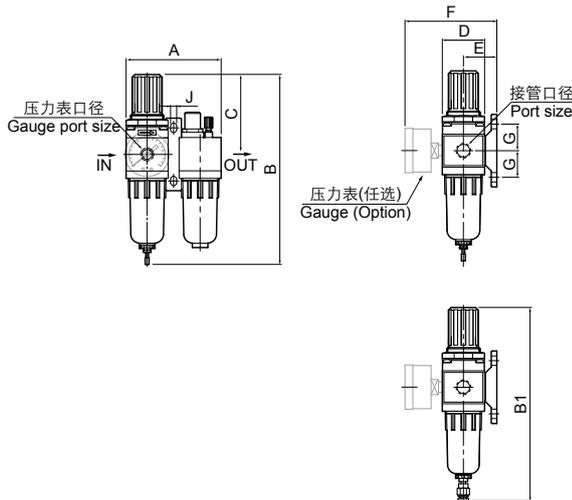

型号 Model	接管口径 Port size Rc(PT)	A	手动排水 Manual drain	自动排水 Auto drain	C	D	E	F	G	J
			B	B1						
KAC2010-02	1/4	88	172	179	71	38	30	102	24	5.5
KAC3010-03	3/8	116	215	222	88	53	41	102	35	7
KAC4010-04	1/2	155	247	254	90	70	50	120	40	9
KAC6010-06/10	3/4, 1	196	361	368	117	92	70	150	50	12