


ARK

过滤器带调压阀+油雾分离器 Filter Regulator + Oil Mist Separator Series KAC 2040~4040



KAC4040

规格 Specifications


型号 Model	KAC 2040~4040
使用流体 Fluid	压缩空气 Compressed air
保证耐压力 Proof pressure	1.5 MPa
最高使用压力 Maximum operating pressure	1.0 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C
过滤精度 Filtration	KAW: 10 μm KAFM: 0.3 μm
滤杯材料 Bowl material	聚碳酸酯 Polycarbonate
调压范围 Regulating pressure range	0.05~0.85 MPa
调压阀型结构 Construction of regulator	带溢流型 Relieving type

型号 Model		组件 Components		规格 Specifications				配件 Accessories			
手动排水 Manual drain	自动排水 Auto drain	过滤器带调压阀 Filter Regulator	油雾分离器 Oil Mist Separator	*额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)	压力表口径 Port size of gauge Rc(PT)	质量 Weight (kg)	支架 Bracket	压力表(任选) Gauge (Option)	自动排水器浮子 Auto drain float	滤杯防护罩 Bowl guard
KAC2040-02	KAC2040-02D	KAW2000	KAFM2000	150	1/4	1/8	0.63	B210T	KG40-10-01	SAD300	有 Equipped
KAC3040-03	KAC3040-03D	KAW3000	KAFM3000	330	3/8	1/8	0.97	B310T			
KAC4040-04	KAC4040-04D	KAW4000	KAFM4000	800	1/2	1/4	1.90	B410T	KG50-10-02	SAD400	


* 额定流量指进气压力为 0.7MPa 的条件下。 Flow rate is at supply pressure 0.7 MPa.

外形尺寸图 Dimensions (mm)

KAC2040

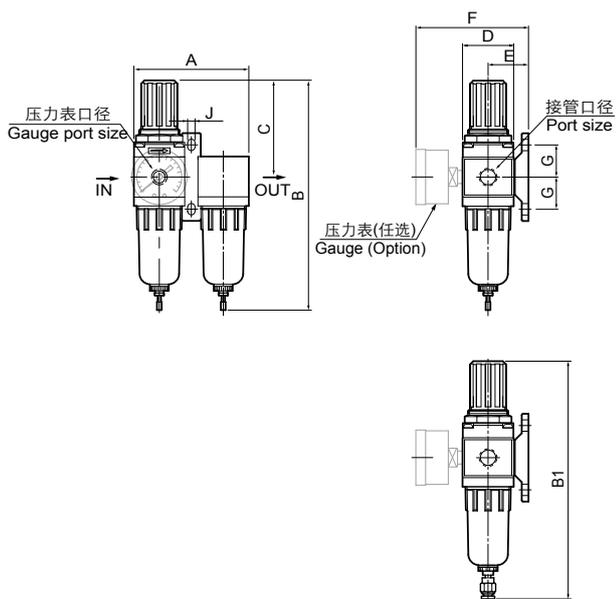

KAC3040~4040

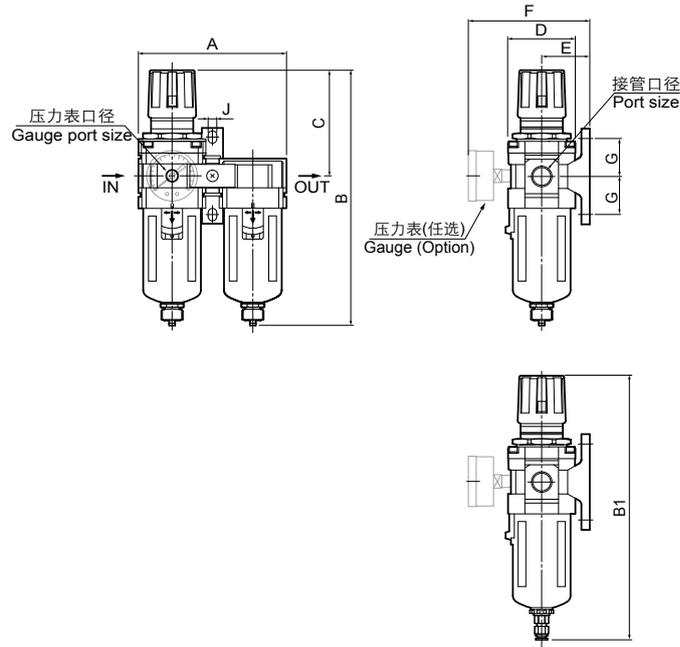

型号 Model	接管口径 Port size Rc(PT)	A	手动排水 Manual drain	自动排水 Auto drain	C	D	E	F	G	J
			B	B1						
KAC2040-02	1/4	88	172	179	71	38	30	102	24	5.5
KAC3040-03	3/8	116	235	242	88	53	41	102	35	7
KAC4040-04	1/2	155	266	273	107	70	50	120	40	9