


主路过滤器 Main Line Filter Series KAFF 250~850



KAFF550

规格 Specifications


型号 Model	KAFF 250~850
使用流体 Fluid	压缩空气 Compressed air
最高使用压力 Maximum operating pressure	1.0 MPa
* 最低使用压力 Minimum operating pressure	0.05 MPa
保证耐压力 Proof pressure	1.5 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C
过滤精度 Filtration	3 μm 去除率 95% Removal rate 95%
滤芯寿命 Life of filter element	2 年或压力差达到 0.1 MPa 时需更换滤芯 Change filter element after 2 years or when pressure drop reaches 0.1 MPa

* 使用自动排水器时，工作压力要在 0.15MPa 以上。If using auto drainer, the minimum operating pressure is required 0.15 MPa.

型号 Model		规格 Specifications			配件 (任选) Accessories (Option)		
手动排水 Manual drain	自动排水 Auto drain	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)	质量 Weight (kg)	支架 Bracket	滤芯 Filter element	自动排水器浮子 Auto drain float
KAFF250-02	KAFF250-02D	750	1/4	0.7	B250	KAFF-EL250	SAD300
KAFF350-03	KAFF350-03D	1500	3/8	0.9	B350	KAFF-EL350	SAD400
KAFF350-04	KAFF350-04D	1500	1/2	0.9	B350	KAFF-EL350	SAD400
KAFF450-06	KAFF450-06D	2200	3/4	1.6	B450	KAFF-EL450	SAD400
KAFF550-06	KAFF550-06D	3500	3/4	2.0	B550	KAFF-EL550	SAD400
KAFF550-10	KAFF550-10D	3500	1	2.0	B550	KAFF-EL550	SAD400
KAFF650-14	KAFF650-14D	6000	1 1/2	5.0	B650	KAFF-EL650	SAD400
KAFF850-14	KAFF850-14D	12000	1 1/2	11.5	B850	KAFF-EL850	SAD400
KAFF850-20	KAFF850-20D	12000	2	11.5	B850	KAFF-EL850	SAD400

* 额定流量指进气压力为 0.7MPa 的条件下。Flow rate is at supply pressure 0.7 MPa.

外形尺寸图 Dimensions (mm)

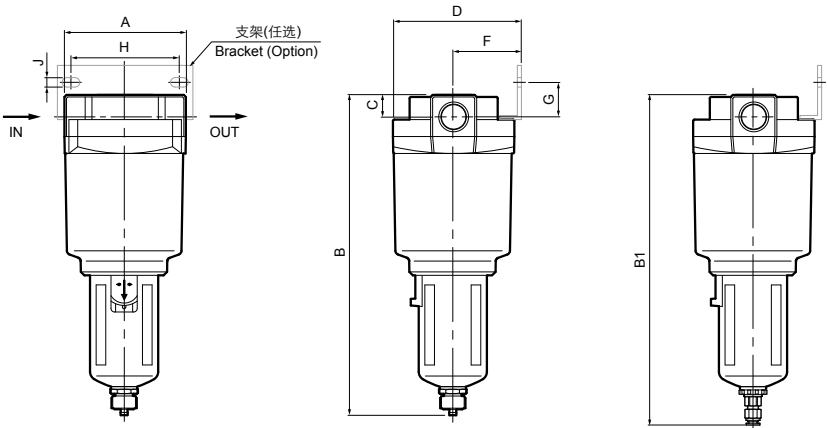

* 型号 Model	接管口径 Port size Rc(PT)	A	手动排水 Manual drain	自动排水 Auto drain	C	F	G	H	J
			B	B1					
KAFF250	1/4	76	202	209	13	40	66	20	6
KAFF350	3/8, 1/2	90	250	257	16	50	80	22	7
KAFF450	3/4	106	283	290	19	55	90	25	9
KAFF550	3/4, 1	122	320	327	22	65	100	30	9
KAFF650	1 1/2	180	396	403	42	100	150	30	13
KAFF850	1 1/2, 2	180	507	514	42	100	150	30	13

* 本产品另有金属滤杯可选，型号后加注 "-MeF"。The model adapted metal bowl is available by adding the suffix "-MeF" in order number to specify.