


油雾分离器 Oil Mist Separator Series KAM 250~850



KAM350


规格 Specifications

型号 Model	KAM 250~850
使用流体 Fluid	压缩空气 Compressed air
最高使用压力 Maximum operating pressure	1.0 MPa
最低使用压力 Minimum operating pressure	0.15 MPa
保证耐压力 Proof pressure	1.5 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C
过滤精度 Filtration	0.3 μm 95% 去除率 Removal rate
分离后油雾浓度 After Oil Mist Density	最多 Max. 1.0 mg/m ³ (ANR) (≈ 0.8 ppm)
滤芯寿命 Life of filter element	2 年或压力差达到 0.1 MPa 时需更换滤芯 Change filter element after 2 years or when pressure drop reaches 0.1 MPa

型号 Model		规格 Specifications			配件 (任选) Accessories (Option)		
手动排水 Manual drain	自动排水 Auto drain	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)	质量 Weight (kg)	支架 Bracket	滤芯 Filter element	自动排水器浮子 Auto drain float
KAM250-02	KAM250-02D	750	1/4	0.5	B250	KAM-EL250	SAD300
KAM350-03	KAM350-03D	1500	3/8	0.9	B350	KAM-EL350	SAD400
KAM350-04	KAM350-04D	1500	1/2	0.9	B350	KAM-EL350	SAD400
KAM450-06	KAM450-06D	2200	3/4	1.4	B450	KAM-EL450	SAD400
KAM550-06	KAM550-06D	3500	3/4	1.9	B550	KAM-EL550	SAD400
KAM550-10	KAM550-10D	3500	1	1.9	B550	KAM-EL550	SAD400
KAM650-14	KAM650-14D	6000	1 1/2	4.2	B650	KAM-EL650	SAD400
KAM850-14	KAM850-14D	12000	1 1/2	10.5	B850	KAM-EL850	SAD400
KAM850-20	KAM850-20D	12000	2	10.5	B850	KAM-EL850	SAD400

* 额定流量指进气压力为 0.7MPa 的条件下。Flow rate is at supply pressure 0.7MPa.

外形尺寸图 Dimensions (mm)

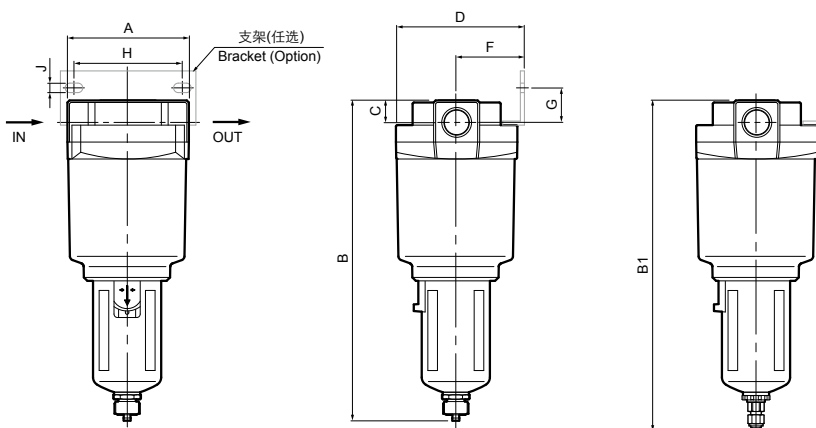

* 型号 Model	接管口径 Port size Rc(PT)	A	手动排水 Manual drain	自动排水 Auto drain	C	F	G	H	J
			B	B1					
KAM250	1/4	76	202	209	13	40	66	20	6
KAM350	3/8, 1/2	90	250	257	16	50	80	22	7
KAM450	3/4	106	283	290	19	55	90	25	9
KAM550	3/4, 1	122	320	327	22	65	100	30	9
KAM650	1 1/2	180	396	403	42	100	150	30	13
KAM850	1 1/2, 2	180	507	514	42	100	150	30	13

* 本产品另有金属滤杯可选，型号后加注 "-MeF"。The model adapted metal bowl is available by adding the suffix '-MeF' in order number to specify.