

KAMD350


规格 Specifications

型号 Model	KAMD 250~850
使用流体 Fluid	压缩空气 Compressed air
最高使用压力 Maximum operating pressure	1.0 MPa
最低使用压力 Minimum operating pressure	0.15 MPa
保证耐压力 Proof pressure	1.5 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C
过滤精度 Filtration	0.01 μm 95% 去除率 Removal rate
分离后油雾浓度 After Oil Mist Density	最多 Max. 0.1 mg/m ³ (ANR) (≈ 0.08 ppm)
滤芯寿命 Life of filter element	2 年或压力差达到 0.1 MPa 时需更换滤芯 Change filter element after 2 years or when pressure drop reaches 0.1 MPa

型号 Model		规格 Specifications			配件 (任选) Accessories (Option)		
手动排水 Manual drain	自动排水 Auto drain	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)	质量 Weight (kg)	支架 Bracket	滤芯 Filter element	自动排水器浮子 Auto drain float
KAMD250-02	KAMD250-02D	500	1/4	0.55	B250	KAMD-EL250	SAD300
KAMD350-03	KAMD350-03D	1000	3/8	0.6	B350	KAMD-EL350	SAD400
KAMD350-04	KAMD350-04D	1000	1/2	0.6	B350	KAMD-EL350	SAD400
KAMD450-06	KAMD450-06D	2000	3/4	1.4	B450	KAMD-EL450	SAD400
KAMD550-06	KAMD550-06D	3500	3/4	2.0	B550	KAMD-EL550	SAD400
KAMD550-10	KAMD550-10D	3500	1	2.0	B550	KAMD-EL550	SAD400
KAMD650-14	KAMD650-14D	6000	1 1/2	4.2	B650	KAMD-EL650	SAD400
KAMD850-14	KAMD850-14D	12000	1 1/2	10.5	B850	KAMD-EL850	SAD400
KAMD850-20	KAMD850-20D	12000	2	10.5	B850	KAMD-EL850	SAD400

* 额定流量指进气压力为 0.7MPa 的条件下。Flow rate is at supply pressure 0.7 MPa.

外形尺寸图 Dimensions (mm)

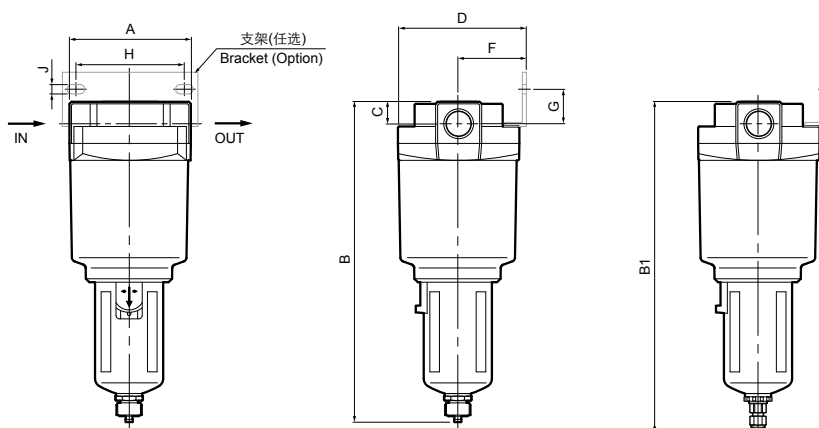

* 型号 Model	接管口径 Port size Rc(PT)	A	手动排水 Manual drain	自动排水 Auto drain	C	F	G	H	J
			B	B1					
KAMD250	1/4	76	202	209	13	40	66	20	6
KAMD350	3/8, 1/2	90	250	257	16	50	80	22	7
KAMD450	3/4	106	283	290	19	55	90	25	9
KAMD550	3/4, 1	122	320	327	22	65	100	30	9
KAMD650	1 1/2	180	396	403	42	100	150	30	13
KAMD850	1 1/2, 2	180	507	514	42	100	150	30	13

* 本产品另有金属滤杯可选，型号后加注 "-MeF"。The model adapted metal bowl is available by adding the suffix '-MeF' in order number to specify.