

规格 Specifications



KAR8025


型号 Model	KAR 8025~9025
使用流体 Fluid	压缩空气 Compressed air
保证耐压力 Proof pressure	1.5 MPa
最高使用压力 Maximum operating pressure	1.0 MPa
调压范围 Regulating pressure range	0.05~0.85 MPa
环境及流体温度 Ambient and fluid temperature	5~60°C
阀型结构 Construction	带溢流型 Relieving type

型号 Model	规格 Specifications				配件 Accessories
	* 额定流量 Flow rate (l/min)	接管口径 Port size Rc(PT)	压力表口径 Port size of gauge Rc(PT)	质量 Weight (kg)	压力表 (任选) Gauge (Option)
KAR8025-12	18000	1 1/4	1/4	2.5	KG50-10-02
KAR8025-14	18000	1 1/2		2.5	
KAR9025-20	22000	2		4.5	

* 额定流量指进气压力为 0.7MPa，二次侧压力设定 0.5MPa 的条件下。
Flow rate is at supply pressure 0.7 MPa and secondary pressure setting 0.5 MPa

外形尺寸图 Dimensions (mm)

KAR8025~9025

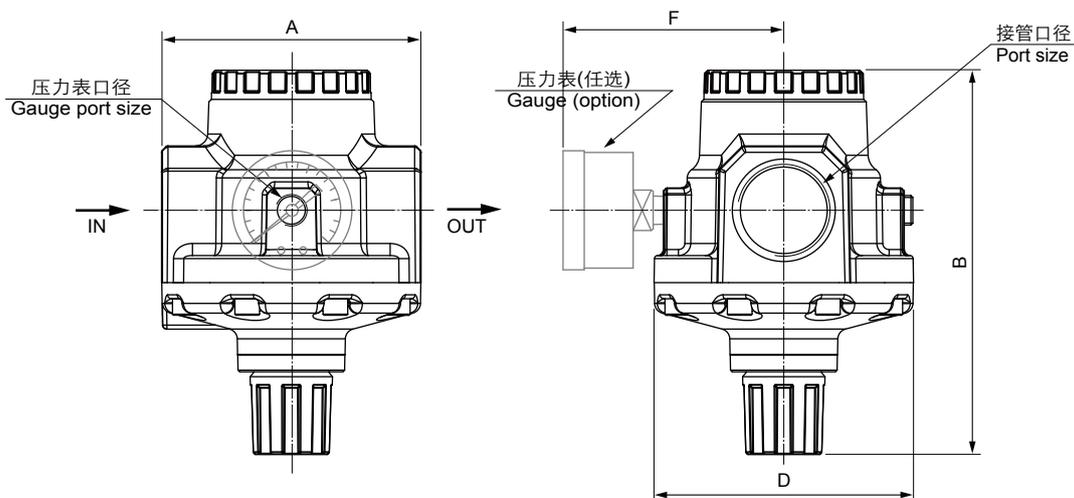

型号 Model	接管口径 Port size Rc(PT)	A	B	D	F
KAR8025-12/14	1 1/4, 1 1/2	126	198	126	98
KAR9025-20	2	160	226	160	118