


标准气缸/直接安装 (内置磁环) Standard Air Cylinder/ Direct Mount (Built-in Magnet) Series KCM2R (Ø20 ~ Ø40)



规格 Specifications

缸径	Bore(mm)	20	25	32	40
使用流体	Fluid	洁净空气 Clean Air			
动作形式	Action	双动 Double Acting			
保证耐压力	Proof Press. (MPa)	1.5			
最高使用压力	Max. Press. (MPa)	1.0			
最低使用压力	Min. Press. (MPa)	0.05			
环境及流体温度	Ambient Temperature	-5~60°C (未冻结 No Freezing)			
活塞速度	Piston Speed	50~500mm/s			
缓冲装置	Cushion	橡胶缓冲 Rubber bumper			
行程公差	Stroke Tolerance	+1.4 0			
* 润滑	Lubrication	不需要 Not required			
接管口径	Port Size Rc(PT)	1/8"	1/8"	1/8"	1/4"


* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.

行程/磁性开关选择 Standard Stroke/Auto Switch

缸径 Bore (mm)	标准行程 Standard Stroke (mm)	环带安装型 Band Mounting
		磁性开关/固定钢带 Auto switch/ Band
20	25,50,75,100,125,150	D-C73K□/ PBK D-Z80K□/ PBC-S
25	25,50,75,100,125,150,200	
32		
40	25,50,75,100,125,150,200,250,300	


注: 有非标行程可供选择 Nonstandard stroke available.

型号表示方法 How To Order

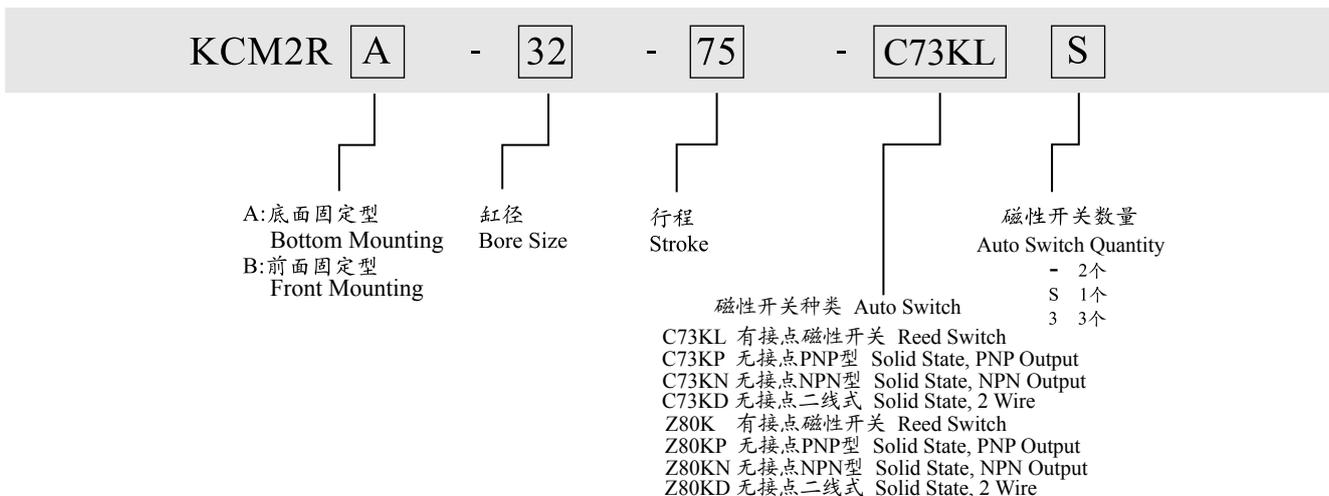

标准气缸/直接安装 (内置磁环)
 Standard Air Cylinder/ Direct Mount (Built-in Magnet)
 Series KCM2R
 外形尺寸图Dimensions (mm)


KCM2RA

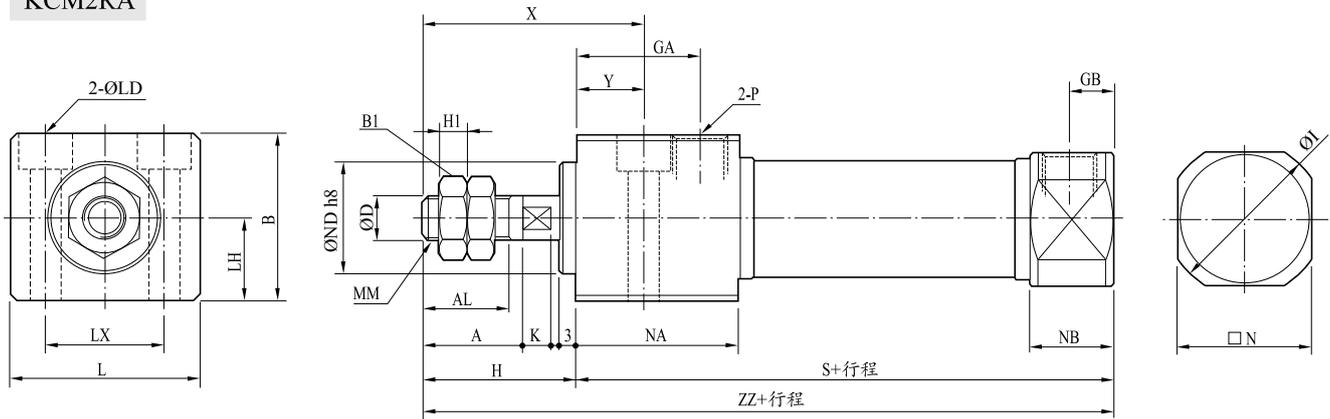

代号 缸径	A	AL	B	B1	D	GA	GB	H	H1	I	K	L	LD	LH	LX	MM	N	NA
20	18	15.5	30	13	8	22	8	27	5	27.6	5	33.5	Ø5.5贯通, Ø9.5×6.5深	15	21	M8×1.25	24	29
25	22	19.5	36	17	10	22	8	31	6	33	5.5	39	Ø6.6贯通, Ø11×7.5深	18	25	M10×1.25	30	29
32	22	19.5	42	17	12	22	8	31	6	36.8	5.5	47	Ø9贯通, Ø14×10深	21	30	M10×1.25	34.5	29
40	24	21	52	22	14	27	11	34	8	45.8	7	58.5	Ø11贯通, Ø17.5×12.5深	26	38	M14×1.5	42.5	37.5

代号 缸径	NB	ND	P	S	X	Y	ZZ
20	14.5	20 ⁰ _{-0.033}	1/8"	76	39	12	103
25	14.5	26 ⁰ _{-0.033}	1/8"	76	43	12	107
32	14.5	26 ⁰ _{-0.033}	1/8"	78	43	12	109
40	21	32 ⁰ _{-0.039}	1/4"	104	49	15	138

KCM2RB

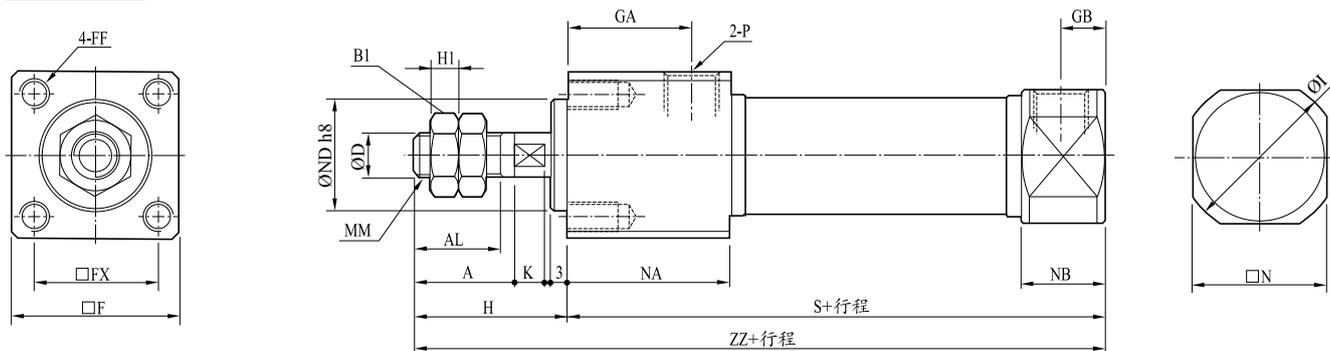


代号 缸径	A	AL	B1	D	F	FF	FX	GA	GB	H	H1	I	K	MM	N	NA	NB	ND	P
20	18	15.5	13	8	30	M5×0.8×9深	22	22	8	27	5	27.6	5	M8×1.25	24	29	14.5	20 ⁰ _{-0.033}	1/8"
25	22	19.5	17	10	36	M6×1.0×11深	26	22	8	31	6	33	5.5	M10×1.25	30	29	14.5	26 ⁰ _{-0.033}	1/8"
32	22	19.5	17	12	42	M6×1.0×11深	30	22	8	31	6	36.8	5.5	M10×1.25	34.5	29	14.5	26 ⁰ _{-0.033}	1/8"
40	24	21	22	14	52	M8×1.25×14深	36	27	11	34	8	45.8	7	M14×1.5	42.5	37.5	21	32 ⁰ _{-0.039}	1/4"


代号 缸径	S	ZZ
20	76	103
25	76	107
32	78	109
40	104	138

标准气缸/直接安装 (内置磁环)
 Standard Air Cylinder/ Direct Mount (Built-in Magnet)
 Series KCM2R
 外形尺寸图Dimensions (mm)


I型单肘节接头 (I Type Single Knuckle Joint)

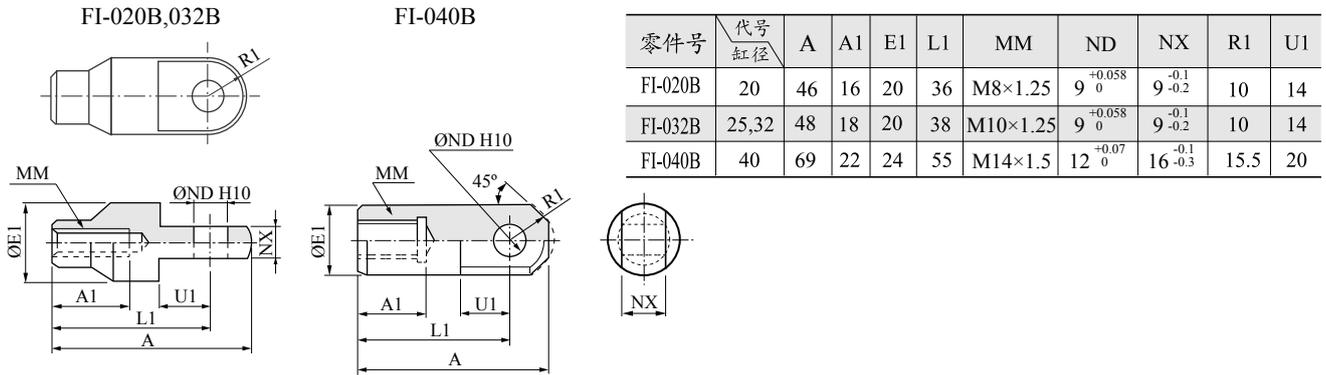

Y型双肘节接头 (Y Type Double Knuckle Joint)

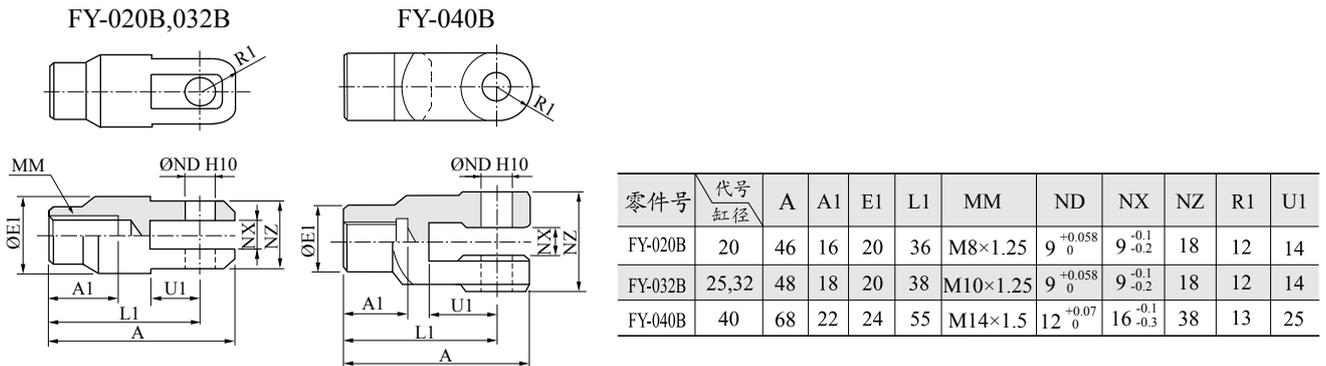


杆端螺母 (Rod End Nut)

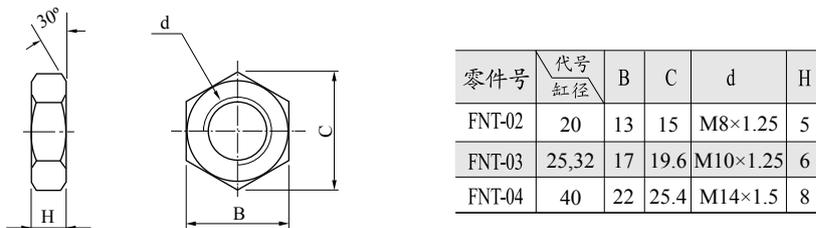


U型钩及肘节接头销子
 (Clevis And Knuckle Joint Pin)

适用缸径
 (Applicable Cylinder Bore)
 Ø20, Ø25, Ø32
 FCDP-1



U型钩销子
 (Clevis Pin)

适用缸径
 (Applicable Cylinder Bore)
 Ø40
 FCDP-2



肘节接头销子
 (Knuckle Pin)

适用缸径
 (Applicable Cylinder Bore)
 Ø40
 FCDP-3

