


先导型2通电磁阀 2-Port Pilot Operated Solenoid Valve Series KGD□□XC



规格 Specifications

使用流体 Fluids	空气, 水, 热水, 瓦斯, 轻油等 Air, water, hot water, gas, light oil, etc.
动作方式 Operation	先导式 Pilot operated
形式 Structure	常闭 N.C., 常开 N.O.
接管口径 Port size	G3/8-G2
动作压力范围 Operating pressure range	0.05~1.6 MPa
阀体材质 Body material	锻铜, 不锈钢SS316 Brass, stainless steel SS316
密封材质 Seal material	丁晴橡胶 NBR, 氟橡胶 VITON, 乙丙橡胶 EPDM
环境温度 Ambient temperature	0~65°C
流体温度 Fluid temperature	0~80°C (丁晴橡胶 NBR), 0~120°C (氟橡胶 VITON) 0~130°C (乙丙橡胶 EPDM)
标准电压 Rated voltage	AC24V, AC110V, AC220V, DC12V, DC24V ±10%允许波动 Permissible variation
安装方式 Mounting	任意 (在动作压力差范围内) Free (within operating pressure difference)

常闭型 Normally Closed

* 型号 Model	接管 口径 Port size	通孔 直径 Orifice (mm)	Cv	最低动作 压力差 Min. operating pressure difference (MPa)	最高动作压力差 Max. operating pressure difference (MPa)						功率 Power	
					空气 Air		水 Water		轻油 Light oil ≤20 CST)		VA	W
					AC	DC	AC	DC	AC	DC	AC	DC
KGD-10XC-13	G3/8	13	4.5	0.05	1.6	1.6	1.6	1.6	1.3	1.3	22	13
KGD-15XC-13	G1/2	13	4.5	0.05	1.6	1.6	1.6	1.6	1.3	1.3	22	13
KGD-20XC-20	G3/4	20	7.6	0.05	1.6	1.6	1.6	1.6	1.3	1.3	22	13
KGD-25XC-25	G1	25	12	0.05	1.6	1.6	1.6	1.6	1.3	1.3	22	13
KGD-32XC-35	G1 1/4	35	22	0.05	1.6	1.6	1.6	1.6	1.3	1.3	22	13
KGD-40XC-40	G1 1/2	40	30	0.05	1.6	1.6	1.6	1.6	1.3	1.3	22	13
KGD-50XC-50	G2	50	48	0.05	1.6	1.6	1.6	1.6	1.3	1.3	22	13


* 可选择防爆线圈, 防爆等级Exm II T4 Explosion-proof coil is optional, graded Exm II T4.

常开型 Normally Open


* 型号 Model	接管 口径 Port size	通孔 直径 Orifice (mm)	Cv	最低动作 压力差 Min. operating pressure difference (MPa)	最高动作压力差 Max. operating pressure difference (MPa)						功率 Power	
					空气 Air		水 Water		轻油 Light oil ≤20 CST)		VA	W
					AC	DC	AC	DC	AC	DC	AC	DC
KGD-10XC-13-□-NO	G3/8	13	4.5	0.05	1.3	1.3	1.3	1.3	0.8	0.8	33	20
KGD-15XC-13-□-NO	G1/2	13	4.5	0.05	1.3	1.3	1.3	1.3	0.8	0.8	33	20
KGD-20XC-20-□-NO	G3/4	20	7.6	0.05	1.3	1.3	1.3	1.3	0.8	0.8	33	20
KGD-25XC-25-□-NO	G1	25	12	0.05	1.3	1.3	1.3	1.3	0.8	0.8	33	20
KGD-32XC-35-□-NO	G1 1/4	35	22	0.05	0.8	0.8	0.8	0.8	0.8	0.8	33	20
KGD-40XC-40-□-NO	G1 1/2	40	30	0.05	0.8	0.8	0.8	0.8	0.8	0.8	33	20
KGD-50XC-50-□-NO	G2	50	48	0.05	0.8	0.8	0.8	0.8	0.8	0.8	33	20

* 可选择防爆线圈, 防爆等级Exm II T4 Explosion-proof coil is optional, graded Exm II T4.

型号表示方法 How To Order

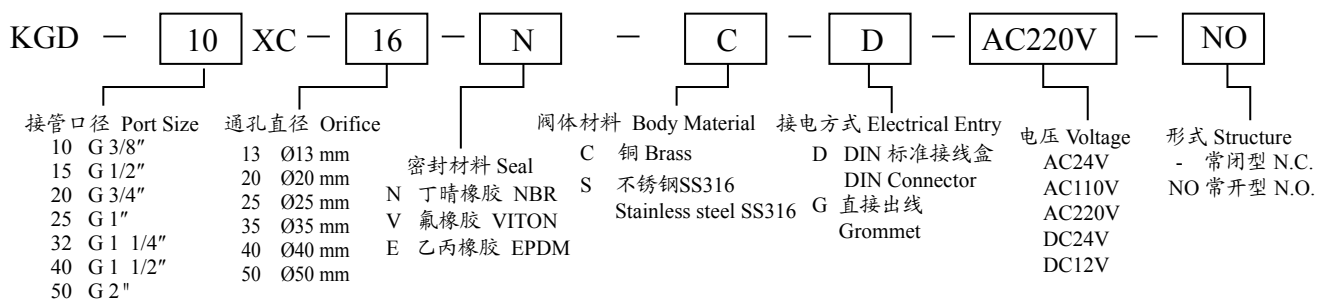


先导型2通电磁阀
 2-Port Pilot Operated Solenoid Valve
 Series KGD□□XC
 外形尺寸图 Dimensions (mm)

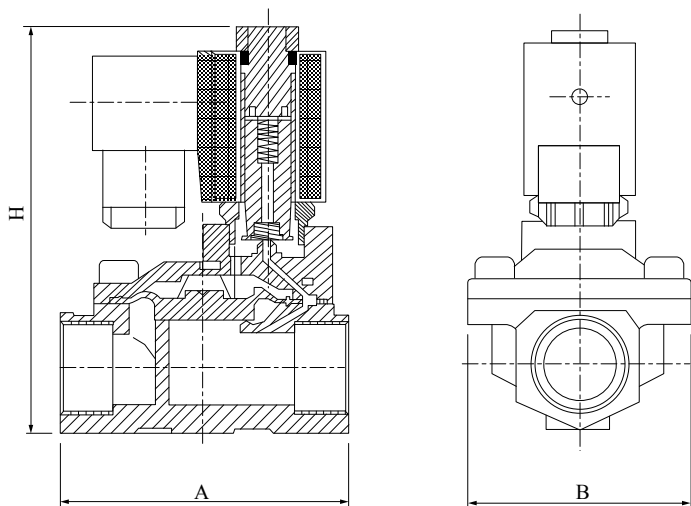

常闭型 Normally Closed

型号 Model	接管 口径 Port size	A	B	H
KGD-10XC-13	G3/8	66	48	107
KGD-15XC-13	G1/2	66	48	107
KGD-20XC-20	G3/4	75	58	112
KGD-25XC-25	G1	96	70	131
KGD-32XC-35	G1 1/4	131	96	146
KGD-40XC-40	G1 1/2	131	96	146
KGD-50XC-50	G2	165	120	167

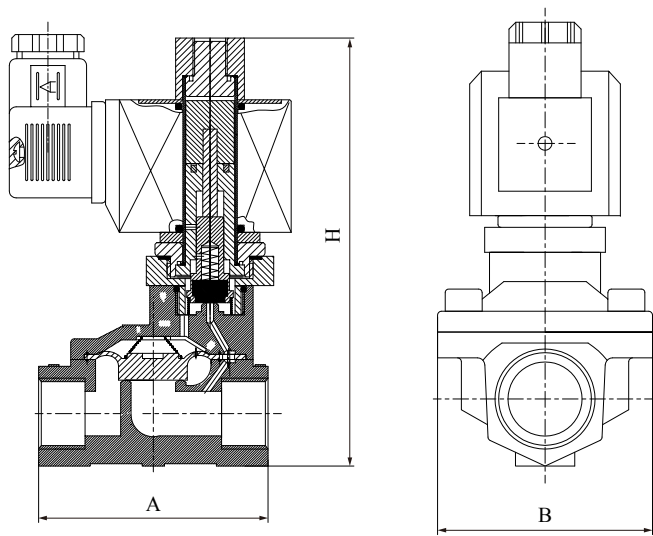

常开型 Normally Open

型号 Model	接管 口径 Port size	A	B	H
KGD-10XC-13-□-NO	G3/8	66	48	124
KGD-15XC-13-□-NO	G1/2	66	48	124
KGD-20XC-20-□-NO	G3/4	75	58	130
KGD-25XC-25-□-NO	G1	96	70	143
KGD-32XC-35-□-NO	G1 1/4	131	96	158
KGD-40XC-40-□-NO	G1 1/2	131	96	158
KGD-50XC-50-□-NO	G2	165	120	179