


3通直动型电磁阀 (微型) 3-Port Direct Operated Solenoid Valve (Miniature) Series KGM114



型号表示 How To Order

KGM114 - [L] - [10] - [DC12V] - Z

接电形式 Electrical Entry

- 直接出线 Grommet
- L L型垂直插座式
90 Degree Connector
- M M型平行插座式
180 Degree Connector

引线长度 Wire Length

- 0: 只提供簧片及插件
- 3: 300mm
- 6: 600mm
- 10: 1000mm




使用电压 Voltage

- DC12V
- DC24V

表示阀带自排



汇流板外形尺寸图 Manifold Dimensions (mm)

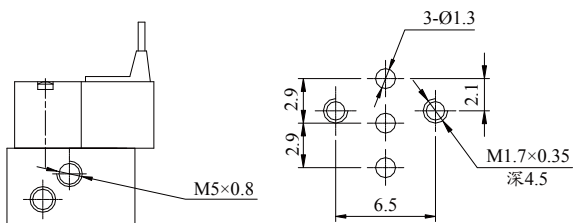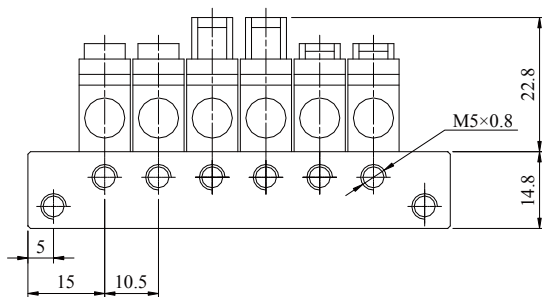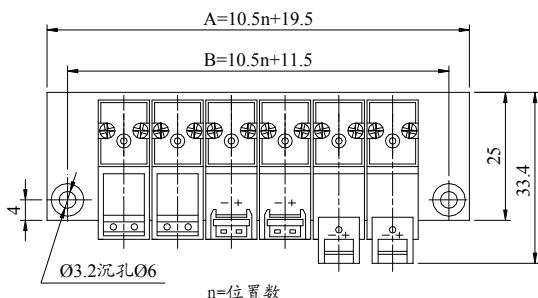


规格 Specifications


型号 Model	KGM114
工作压力范围 Operating Press. Range	0~0.7 MPa
通径 Orifice (mm)	Ø0.7
环境温度 Ambient Temperature	-5°C~50°C (未冻结 No Freezing)
最大操作频率 Max. Working Frequency	5c/sec
* 润滑 Lubrication	不需要 Not Required
响应时间 Response Time	10ms
额定电压 Rated Voltage	DC12V, DC24V
电压波动范围 Voltage Tolerance	-5%~+10%
功率消耗 Power Consumption	1.3w
安装螺栓 Bolt	标准供给 M1.7×0.35

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.


外形尺寸图 Dimensions (mm)

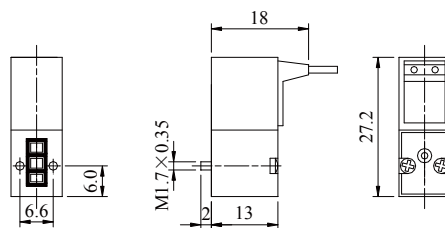


直接出线 KGM114

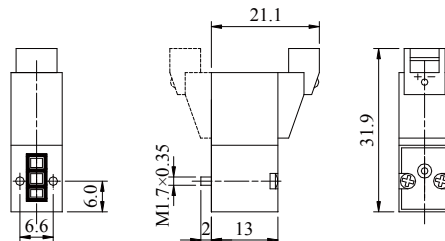

M型平行插座式 KGM114-M

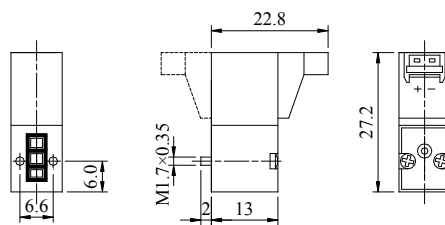

L型垂直插座式 KGM114-L

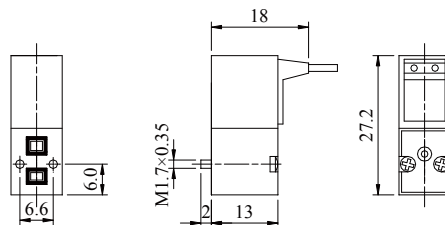

直接出线带自排型 KGM114-□-Z