


ARK 浮动接头 Floating Joint Series KJAT, KJAF



外形尺寸图 Dimensions (mm)

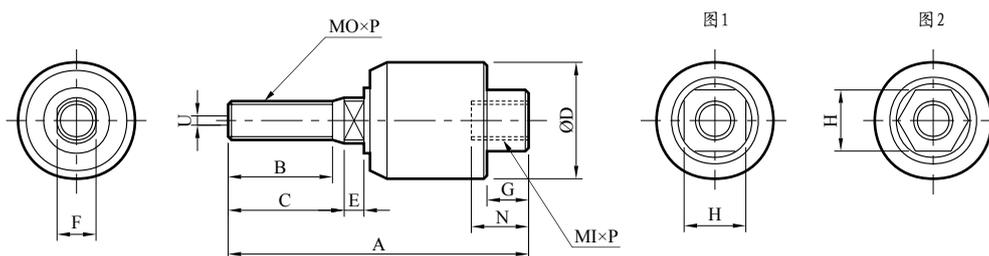

型号	缸径	MI×P	MO×P	A	B	C	D	E	F	G	H	N	容许误差U	图号	重量	摆动角度
KJA-1003T	6	M3×0.5	M3×0.5	24.5	8	9	12	2	3	4	8	7	0.5	图1	10 g	±5°
KJA-1004T	8	M4×0.7	M4×0.7	24.5	8	9	12	2	4	4	8	7	0.5	图1	10 g	
KJA-1005T	10, 15	M5×0.8	M5×0.8	38	14	15	18	3	5	5	11	9	0.5	图1	30 g	
KJA-1006T	15	M6×1.0	M6×1.0	38	14	15	18	3	6	5	11	9	0.5	图1	30 g	
KJA-1008T	20	M8×1.25	M8×1.25	50	18	20	24	4	8	7	14	12	0.5	图1	70 g	
KJA-1010T	25, 30	M10×1.25/1.5	M10×1.25/1.5	59	20	22	26	5	10	7	17	14	0.75	图1	110 g	
KJA-1012T	40	M12×1.25/1.5/1.75	M12×1.25/1.5/1.75	57	20	22	28	5	12	8	19	12	0.75	图1	120 g	
KJA-1014T	40	M14×1.5	M14×1.5	70	21	24	35	7	14	8	22	17	1	图1	250 g	
KJA-1016T	50, 63	M16×1.5	M16×1.5	90	26	28	45	9	16	13	28	24	1.25	图1	502 g	
KJA-1018T	50, 63	M18×1.5	M18×1.5	90	26	28	45	9	18	13	28	24	1.25	图1	505 g	
KJA-1020T	80	M20×1.5	M20×1.5	103	30	32	55	10	20	16	32	27	2	图2	800 g	
KJA-1022T	80	M22×1.5	M22×1.5	103	30	32	55	10	22	16	32	27	2	图2	800 g	
KJA-1024T	100	M24×1.5	M24×1.5	124	35	38	61	12	24	19	41	33	2.5	图2	1.3 kg	
KJA-1026T	100	M26×1.5	M26×1.5	130	43	45	61	12	26	19	41	33	2.5	图2	1.3 kg	
KJA-1027T	125	M27×2.0	M27×2.0	153	63	65	63	20	27	19	41	33	2.5	图2	1.6 kg	
KJA-1030T	125, 140	M30×1.5/2.0/3.5	M30×1.5/2.0/3.5	153	57	59	63	20	30	18	41	33	3	图2	1.6 kg	
KJA-1036T	140, 160	M36×1.5/2.0	M36×1.5/2.0	195	80	82	75	18	36	22	50	41	4	图2	2.9 kg	
KJA-1040T	160	M40×2.0	M40×2.0	194	82	100	75	18	40	23	54	41	5	图2	7.5 kg	
KJA-1045T	160	M45×2.0	M45×2.0	205	78	95	85	14	45	33.5	64	50	5	图2	8.0 kg	
KJA-1050T	160	M50×2.0	M50×2.0	208	78	95	85	14	50	33.5	64	50	6	图2	8.0 kg	

注：气压缸容许使用压力低于10kgf/cm²，油压缸容许使用压力低于70kgf/cm²。

浮动接头 Floating Joint

Series KJAT, KJAF

外形尺寸图 Dimensions (mm)

图3


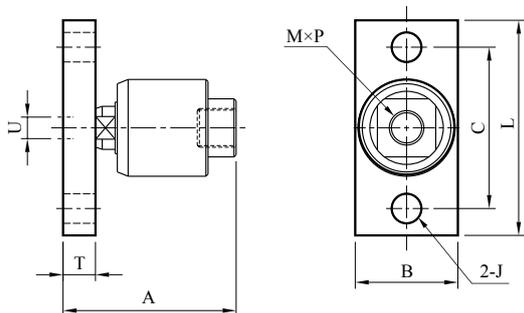


图4

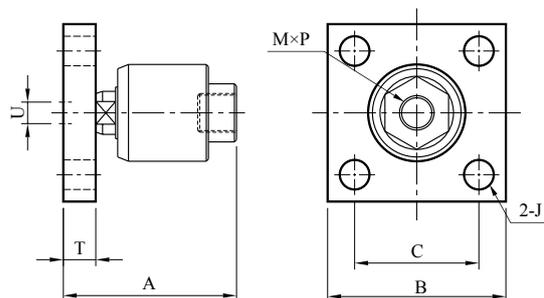

型号	缸径	M×P	A	B	C	J	L	T	容许误差U	图号	重量	摇动角度
KJA-1008F	20	M8×1.25	38	25	40	7	52	6	0.5	图3	115 g	±5°
KJA-1010F	25, 30	M10×1.25	46	32	44	7	56	9	0.75	图3	206 g	
KJA-1012F	40	M12×1.25	46	32	44	7	56	9	0.75	图3	220 g	
KJA-1014F	40	M14×1.5	61	38	60	11	80	12	1	图3	465 g	
KJA-1016F	50, 63	M16×1.5	80	74	45	11	-	15	1.25	图4	1.47 kg	
KJA-1018F	50, 63	M18×1.5	80	74	45	11	-	15	1.25	图4	1.47 kg	
KJA-1020F	80	M20×1.5	91	100	62	14	-	18	1.25	图4	3.25 kg	
KJA-1022F	80	M22×1.5	91	100	62	14	-	18	1.25	图4	3.25 kg	
KJA-1024F	100	M24×1.5	108	100	70	14	-	21	2.5	图4	3.6 kg	
KJA-1026F	100	M26×1.5	108	100	70	14	-	21	2.5	图4	3.6 kg	
KJA-1027F	125	M27×2.0	111	100	70	14	-	21	2.5	图4	3.75 kg	
KJA-1030F	125, 140	M30×1.5	117	100	70	14	-	21	3	图4	3.75kg	
KJA-1036F	140, 160	M36×1.5	140	130	95	16	-	25	4	图4	5.3 kg	

注：气压缸容许使用压力低于10kgf/cm²，油压缸容许使用压力低于70kgf/cm²。