

规格 Specifications


缸径	Bore(mm)	25	32	40	50
接管口径	Port Size Rc(PT)	M5×0.8	1/8"	1/8"	1/4"
使用流体	Fluid	洁净空气 Clean Air			
动作形式	Action	双动 Double Acting			
保证耐压力	Proof Pressure (MPa)	1.05			
使用压力范围	Pressure (MPa)	0.05~0.7			
环境及流体温度	Ambient Temperature	-5~60°C (未冻结 No Freezing)			
缓冲	Cushion	橡胶缓冲(标准) Rubber(STD)			
活塞速度	Piston Speed	50~500mm/s			
行程公差	Stroke Tolerance	+1.4 0			
* 润滑	Lubrication	不需要 Non-Lube			
杆不回转精度	Rod non-rotating accuracy	±1°	±0.8°	±0.5°	±0.5°

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.


行程/磁性开关选择 Standard Stroke/Auto Switch

缸径 Bore(mm)	标准行程 Standard Stroke (mm)	轨道安装型 Rail Mounting	开关固定架 Switch Bracket
25, 32, 40, 50	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100, 125, 150, 175, 200, 250, 300	D-Z80K□	KMUZ-025

型号表示方法 How To Order

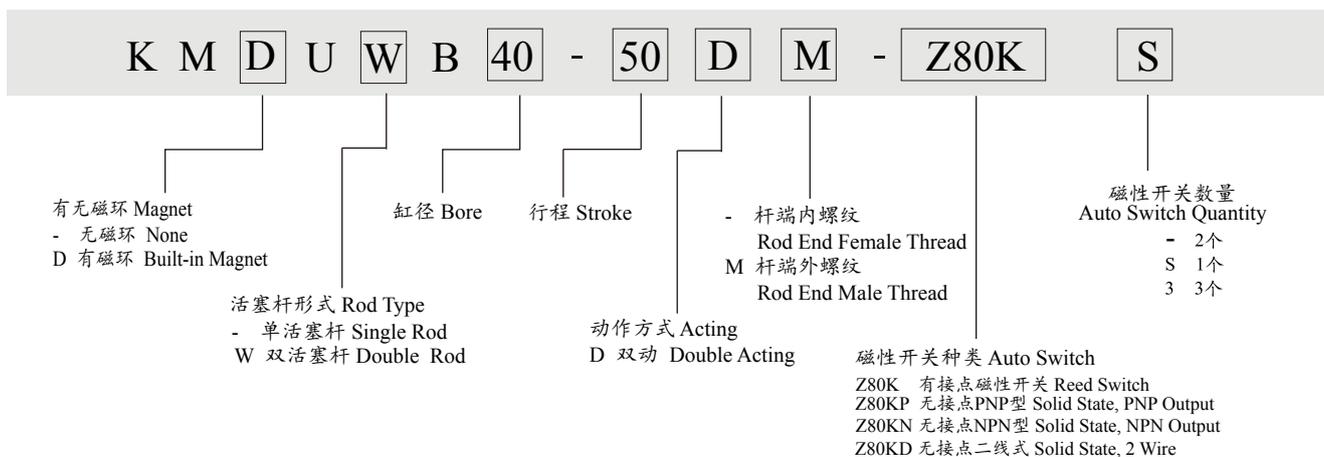

平板式气缸 Plate Air Cylinder
 Series KMUB
 外形尺寸图 Dimensions (mm)

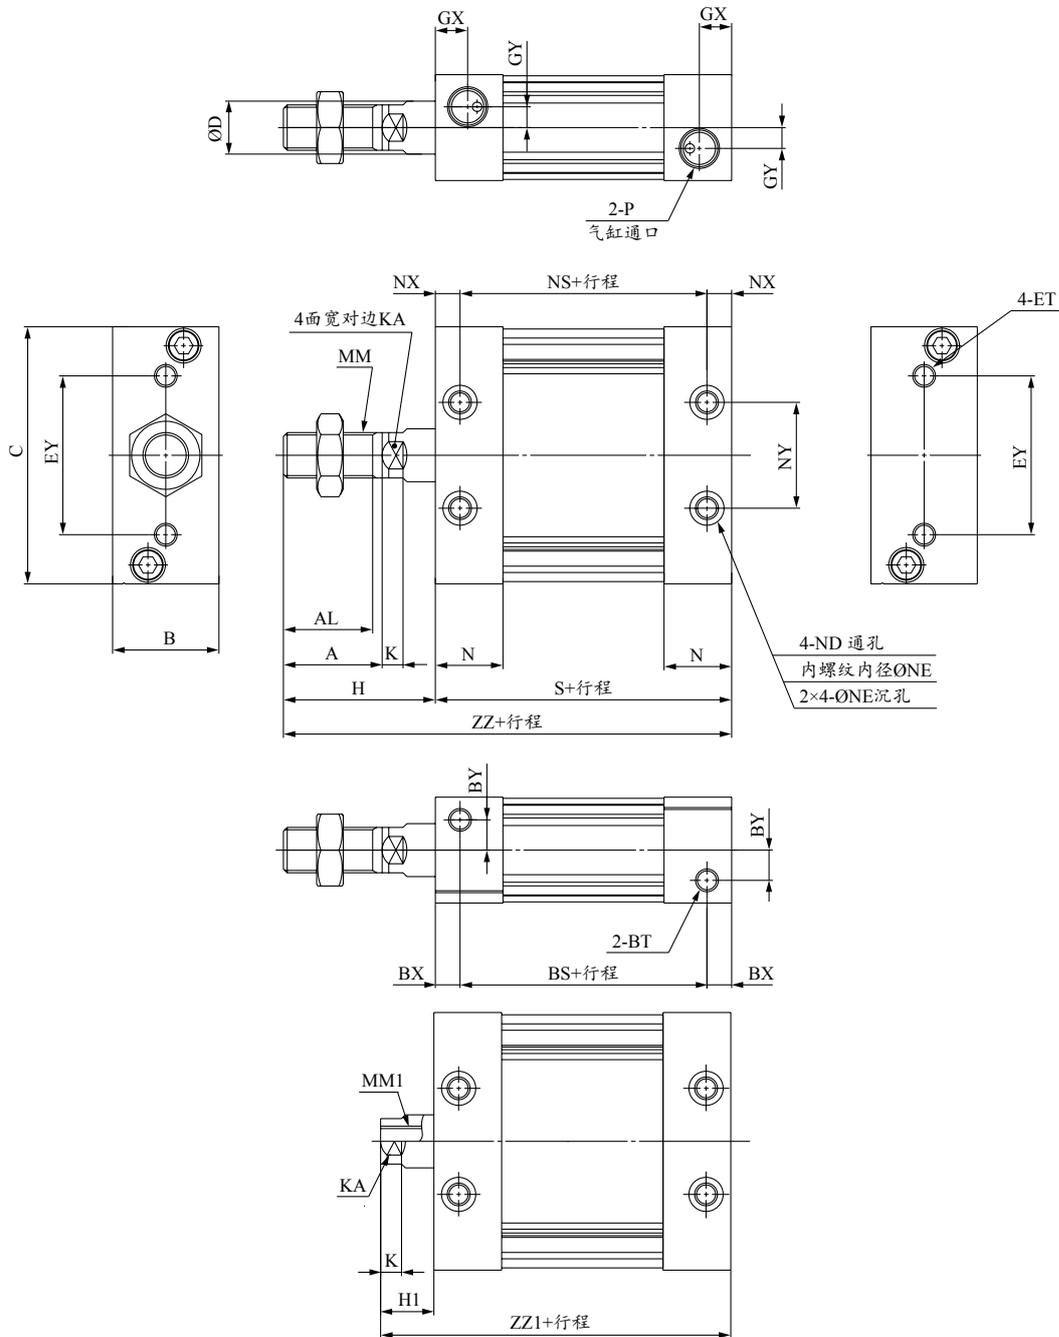

缸径 Bore	A	AL	B	BS	BT	BX	BY	C	D	ET	EY	GX	GY	H	K	KA	MM	NN
25	22	19.5	24	37	M5×0.8深7.5	9	7	54	12	M5×0.8深11	26	10	5	36	5.5	10	M10×1.25	16.5
32	26	23.5	28	45	M6×1深12	6.5	8	68	14	M6×1深11	42	8.5	5.5	40	5.5	12	M12×1.25	18
40	30	27	32	44	M8×1.25深13	8	9	86	16	M8×1.25深11	54	9	7	45	6	14	M14×1.5	18.5
50	35	32	39	54	M10×1.5深14.5	10	9	104	20	M10×1.5深15	64	11.5	8	53	7	18	M18×1.5	24

缸径 Bore	CN	DN	EN	S	NX	NY	P	S	ZZ	H1	MM1	ZZ1
25	7.5深4.5	M5×0.8	4.3	43	6	26	M5×0.8	55	91	14	M6×1深12	69
32	9深5.5	M6×1	5.1	45	6.5	28	Re(PT) 1/8	58	98	14	M8×1.25深13	72
40	10.5深6.5	M8×1.25	6.9	44	8	36	Re(PT) 1/8	60	105	15	M8×1.25深13	75
50	13.5深8.5	M10×1.5	8.7	54	10	42	Re(PT) 1/4	74	127	18	M10×1.5深15	92