


滑台气缸 (侧轨) Air Slide Table (One Side Guide) Series KMXH (Ø6~Ø20)



规格 Specifications


缸径 Bore	6	10	16	20
使用流体 Fluid	洁净空气 Clean air			
接管口径 Port size	M5×0.8			
动作方式 Action	双作用 Double acting			
使用压力范围 Operating pressure range (MPa)	0.15~0.7	0.06~0.7	0.05~0.7	
环境及流体温度 Ambient and fluid temperature	-5~60°C (未冻结 No freezing)			
缓冲 Cushion	橡胶缓冲 Rubber bumper			
活塞速度 Piston speed	50~500 mm/s			
润滑 Lubrication	不需要 Not required			

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.

行程/磁性开关选择 Standard Stroke/Auto Switch

缸径 Bore(mm)	标准行程 Standard Stroke (mm)	轨道安装型 Rail Mounting
6	5, 10, 15, 20, 25, 30, 40, 50, 60	D-Z80K□
10	5, 10, 15, 20, 25, 30, 40, 50, 60	
16	5, 10, 15, 20, 25, 30, 40, 50, 60	
20	5, 10, 15, 20, 25, 30, 40, 50, 60	

型号表示方法 How To Order

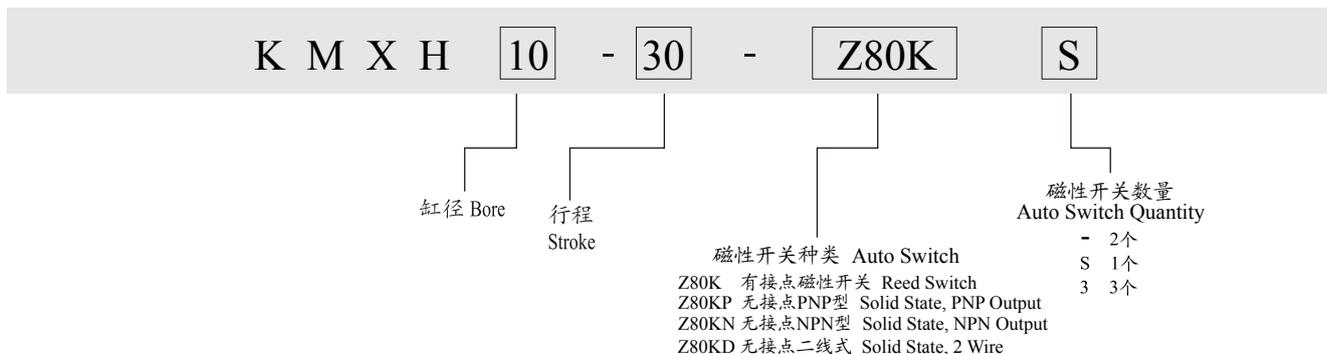


滑台气缸 (侧轨) Air Slide Table (One Side Guide)

Series KMXH


外形尺寸图 Dimensions (mm)

KMXH6

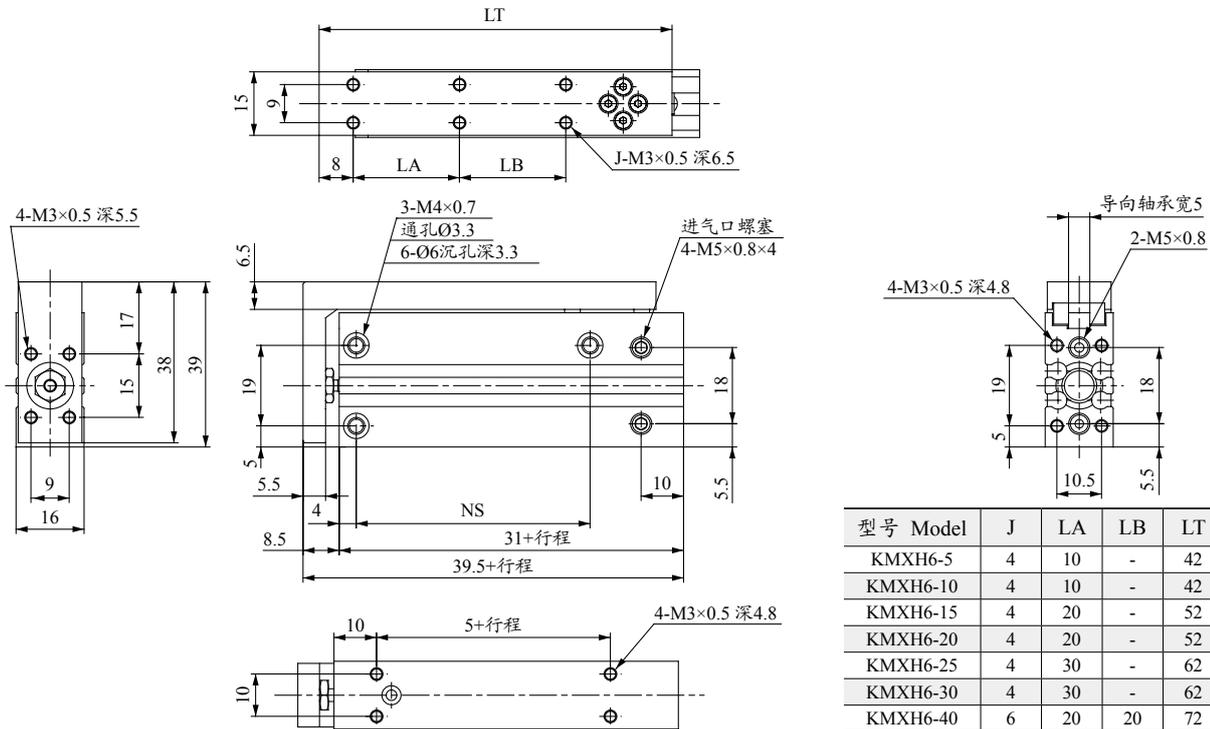

型号 Model	J	LA	LB	LT	NS
KMXH6-5	4	10	-	42	14
KMXH6-10	4	10	-	42	14
KMXH6-15	4	20	-	52	24
KMXH6-20	4	20	-	52	24
KMXH6-25	4	30	-	62	30
KMXH6-30	4	30	-	62	30
KMXH6-40	6	20	20	72	45
KMXH6-50	6	25	25	82	55
KMXH6-60	6	30	30	92	60

KMXH10

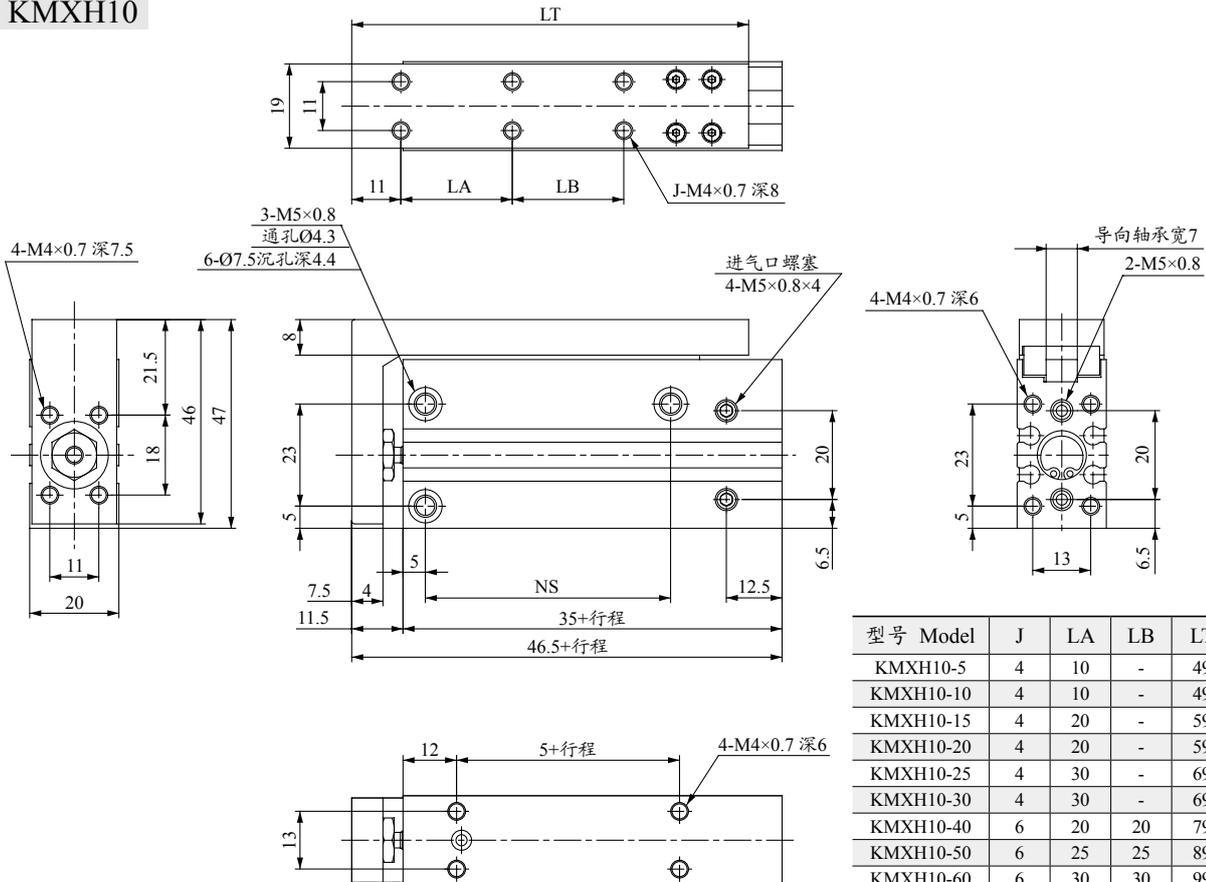


型号 Model	J	LA	LB	LT	NS
KMXH10-5	4	10	-	49	14
KMXH10-10	4	10	-	49	14
KMXH10-15	4	20	-	59	24
KMXH10-20	4	20	-	59	24
KMXH10-25	4	30	-	69	30
KMXH10-30	4	30	-	69	30
KMXH10-40	6	20	20	79	45
KMXH10-50	6	25	25	89	55
KMXH10-60	6	30	30	99	60

滑台气缸 (侧轨) Air Slide Table (One Side Guide)

Series KMXH

外形尺寸图 Dimensions (mm)

KMXH16

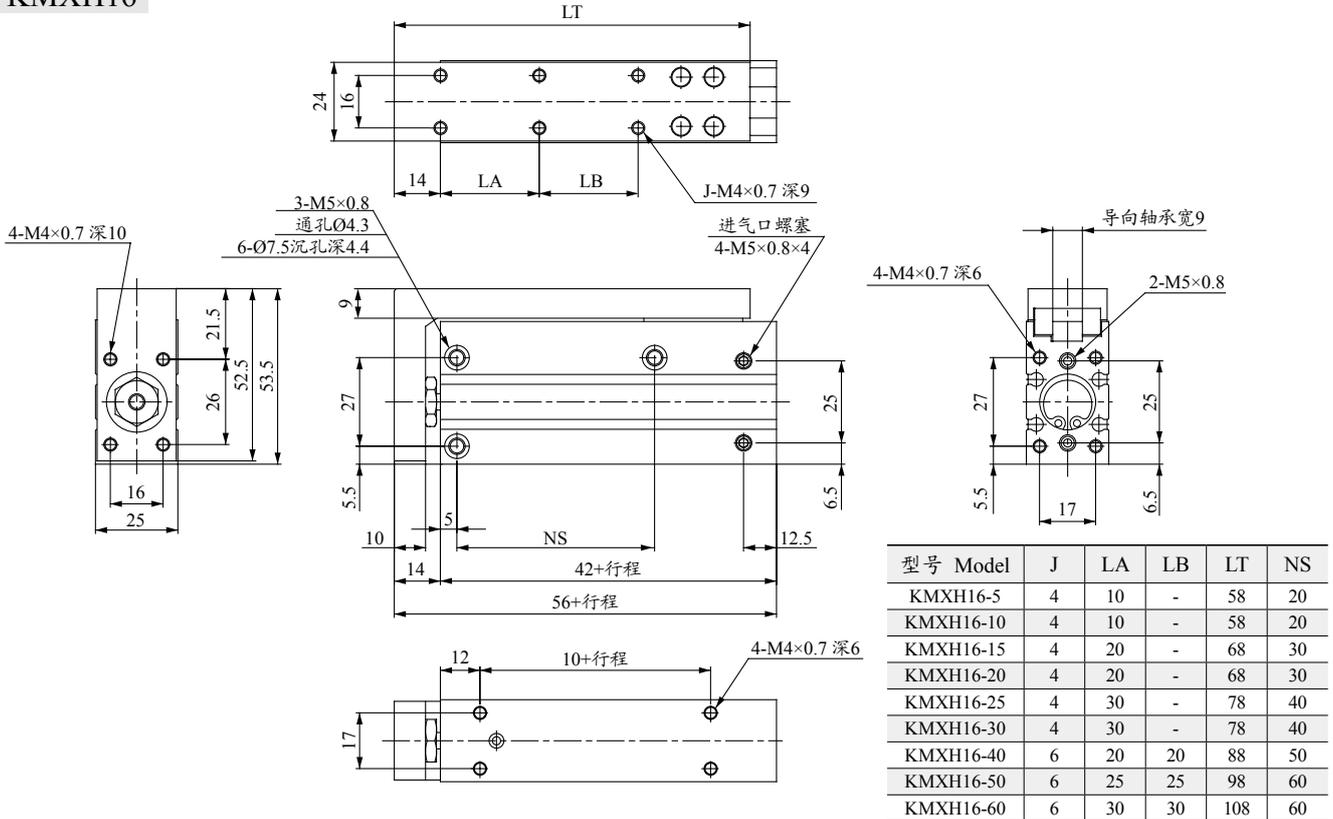

KMXH20

