


## 滑台气缸 (循环直线导轨) Air Slide Table (Recirculating Linear Guide) Series KMXQ (Ø6~Ø25)



### 规格 Specifications


缸径 Bore	6	8	12	16	20	25
使用流体 Fluid	洁净空气 Clean air					
接管口径 Port size Rc(PT)	M5×0.8				1/8	
动作方式 Action	双作用 Double acting					
使用压力范围 Operating pressure range (MPa)	0.15~0.7					
环境及流体温度 Ambient and fluid temperature	-5~60°C (未冻结 No freezing)					
缓冲 Cushion	橡胶缓冲 (标准) Rubber bumper (Standard) 油压缓冲器 (可选) Shock absorber (Option)					
活塞速度 Piston speed	50~500 mm/s					
*润滑 Lubrication	不需要 Not required					

\* 若需要润滑请用透平1号油ISOVG32  
Use Turbine Oil 1st-grade ISOVG32, if necessary.

### 行程/磁性开关选择 Standard Stroke/Auto Switch

缸径 Bore(mm)	标准行程 Standard Stroke (mm)	轨道安装型 Rail Mounting
6	10, 20, 30, 40, 50	D-Z80K□
8	10, 20, 30, 40, 50, 75	
12	10, 20, 30, 40, 50, 75, 100	
16	10, 20, 30, 40, 50, 75, 100, 125	
20, 25	10, 20, 30, 40, 50, 75, 100, 125, 150	

### 型号表示方法 How To Order

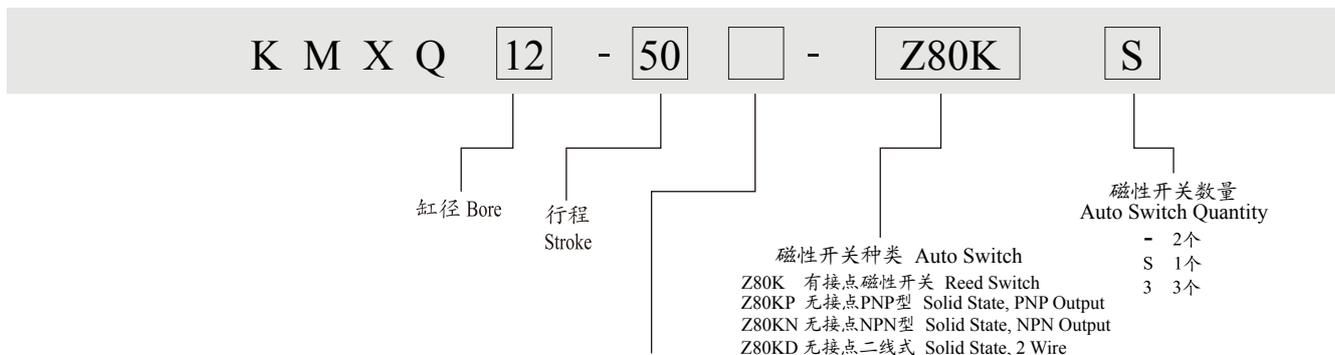

#### 行程调整装置 Stroke Adjuster Option

- 无调整 Without adjuster
- AS 前端调程 Adjuster at extension end
- AT 后端调程 Adjuster at retraction end
- A 两端调程 Adjuster at both ends
- \*BS 前端液压缓冲器 Absorber at extension end
- \*BT 后端液压缓冲器 Absorber at retraction end
- \*B 两端液压缓冲器 Absorber at both ends

\*KMXQ6 无液压缓冲  
Shock absorber is not available for KMXQ6.




# 滑台气缸 (循环直线导轨) Air Slide Table (Recirculating Linear Guide)

## Series KMXQ

### 外形尺寸图 Dimensions (mm)

KMXQ8

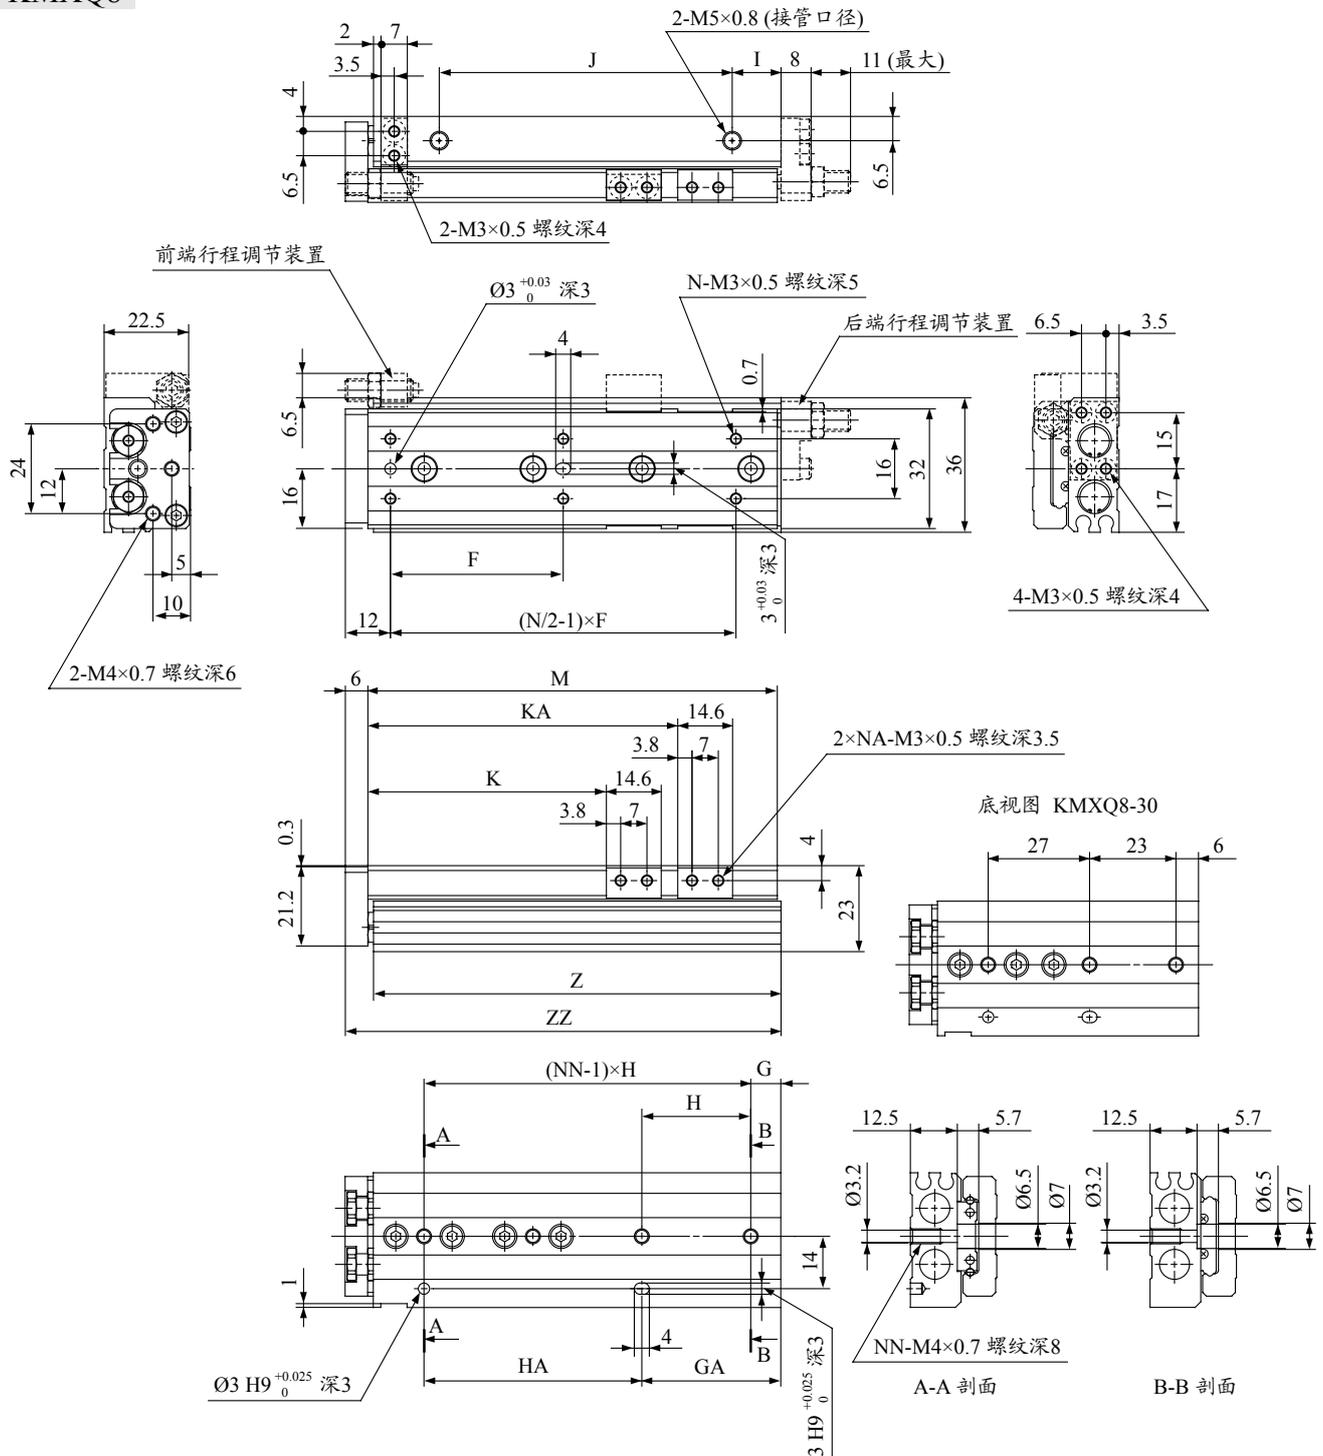


型号 Model	F	G	GA	H	HA	N	NA	NN	I	J	K	KA	M	Z	ZZ
KMXQ8-10	25	7	13	25	19	4	2	2	11	17	23.5	-	46	45.5	53
KMXQ8-20	25	14	14	28	28	4	2	2	10	28	33.5	-	56	55.5	63
KMXQ8-30	26	-	29	-	27	6	2	3	12	40	43.5	-	70	69.5	77
KMXQ8-40	32	8	39	31	31	6	2	3	14	52	53.5	-	84	83.5	91
KMXQ8-50	46	8	37	29	58	6	4	4	13	78	63.5	82.5	109	108.5	116
KMXQ8-75	50	31	61	30	60	6	4	4	12	105	88.5	112.5	135	134.5	142

# 滑台气缸 (循环直线导轨) Air Slide Table (Recirculating Linear Guide)

## Series KMXQ

### 外形尺寸图 Dimensions (mm)

KMXQ12

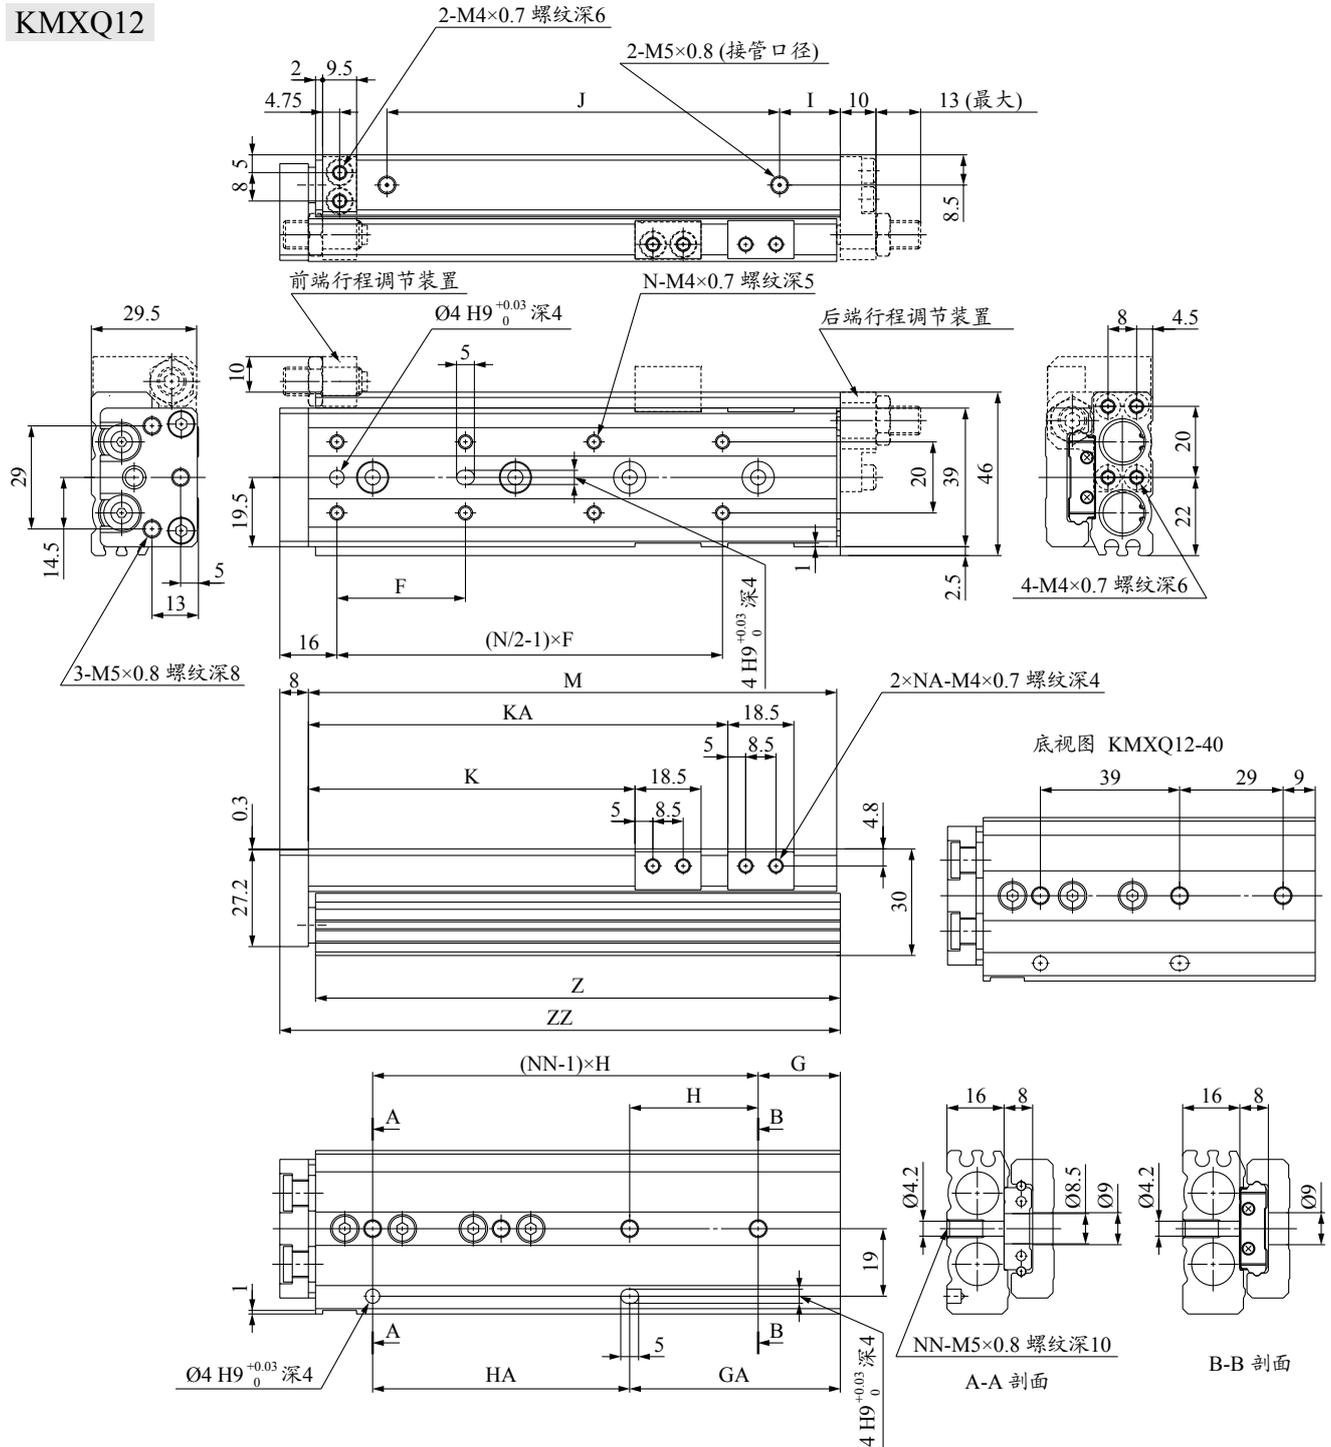


型号 Model	F	G	GA	H	HA	N	NA	NN	I	J	K	KA	M	Z	ZZ
KMXQ12-10	28	18	18	32	32	4	2	2	12	34	26.5	-	67	66	76
KMXQ12-20	28	18	18	32	32	4	2	2	12	34	36.5	-	67	66	76
KMXQ12-30	38	20	20	40	40	4	2	2	14	42	46.5	-	77	76	86
KMXQ12-40	34	-	38	-	39	6	2	3	15	58	56.5	-	94	93	103
KMXQ12-50	34	9	48	39	39	6	2	3	13	70	66.5	-	104	103	113
KMXQ12-75	36	23	59	36	72	8	4	4	17	110	91.5	117.5	148	147	157
KMXQ12-100	36	12	84	36	72	10	4	5	17	135	116.5	142.5	173	172	182

# 滑台气缸 (循环直线导轨) Air Slide Table (Recirculating Linear Guide)

## Series KMXQ

### 外形尺寸图 Dimensions (mm)

KMXQ16

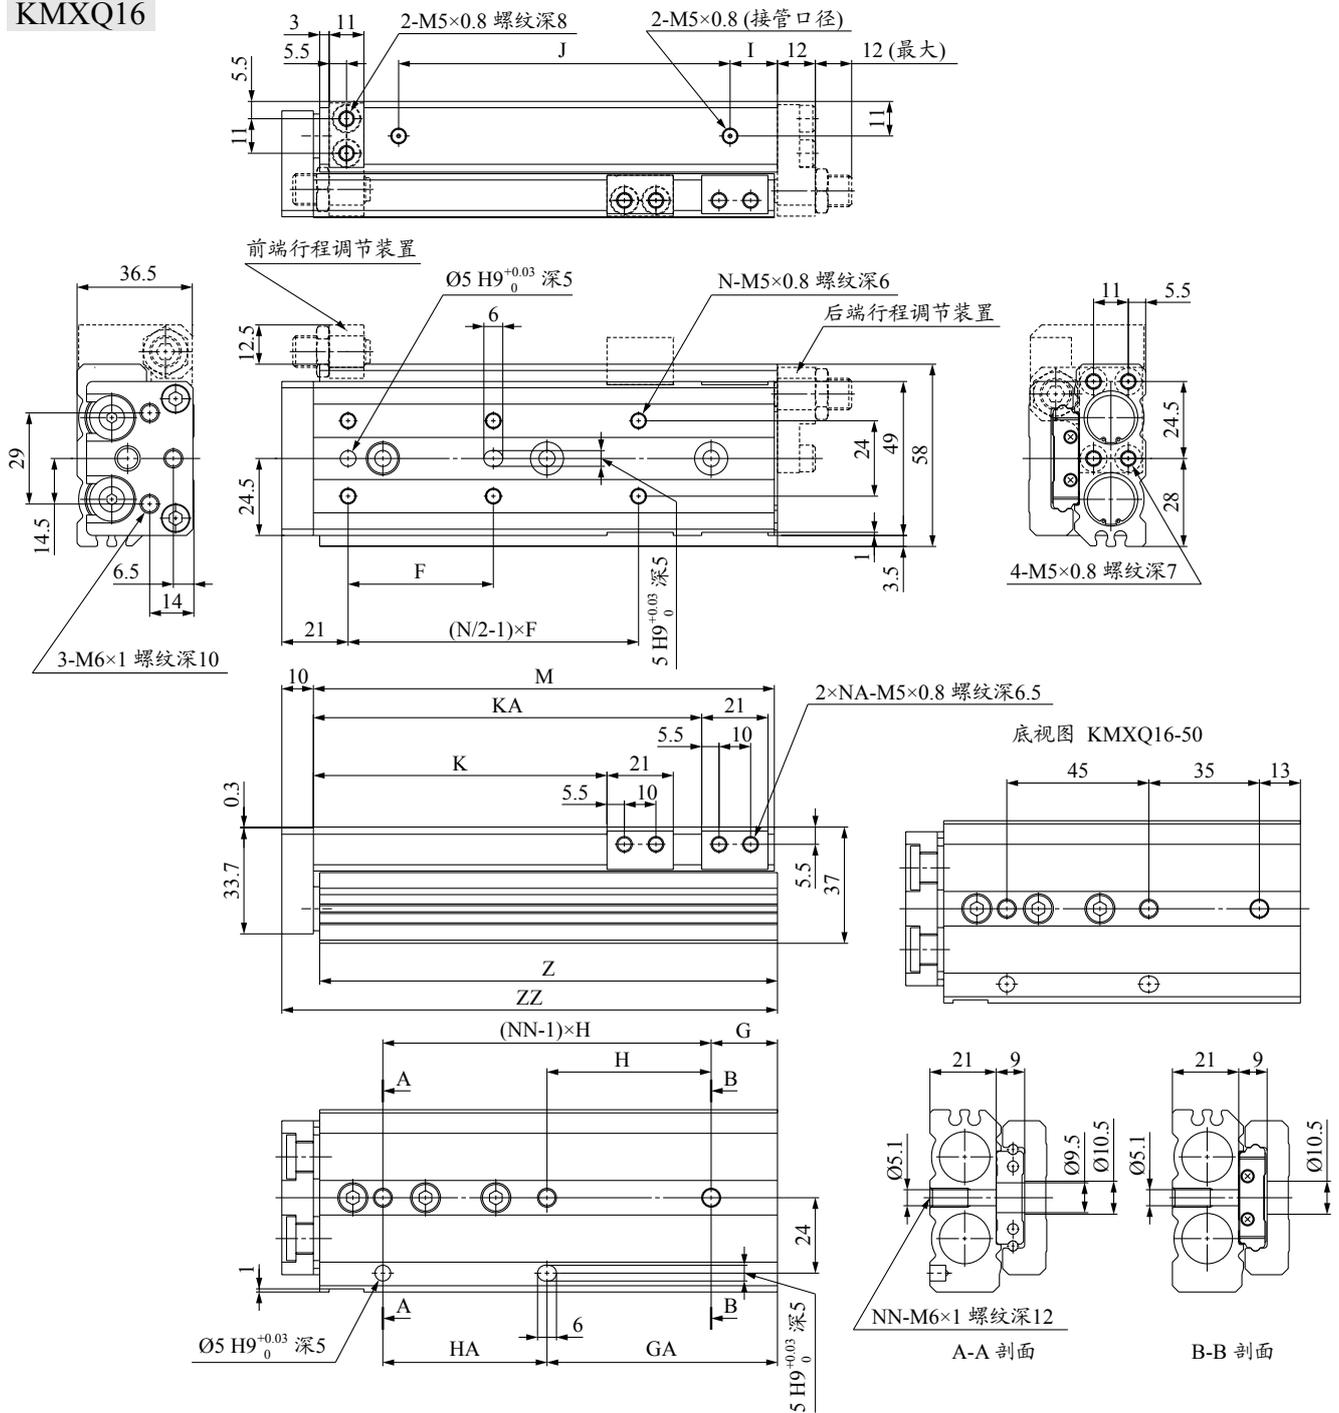

型号 Model	F	G	GA	H	HA	N	NA	NN	I	J	K	KA	M	Z	ZZ
KMXQ16-10	38	18	18	39	39	4	2	2	12	40	28	-	78	77	89
KMXQ16-20	38	18	18	39	39	4	2	2	12	40	38	-	78	77	89
KMXQ16-30	48	19	19	48	48	4	2	2	12	50	48	-	88	87	99
KMXQ16-40	58	19	19	58	58	4	2	2	12	60	58	-	98	97	109
KMXQ16-50	40	-	48	-	45	6	4	3	20	68	68	91	114	113	125
KMXQ16-75	46	21	73	52	52	6	4	3	15	105	93	123	146	145	157
KMXQ16-100	44	36	80	44	88	8	4	4	18	145	118	166	189	188	200
KMXQ16-125	44	17	105	44	88	10	4	5	23	165	143	191	214	213	225



