

ARK 尼龙管 (尼龙12) Nylon Tubing (Nylon 12) Series KNY12



规格 Specifications

使用流体	Fluid	空气、水 Air, water
最高使用压力(20℃)	Max. Pressure (MPa)	参见最大操作压力曲线 Refer to the Max. operating pressure curve
破坏压力	Burst Pressure (MPa)	约为3倍操作压力 about 3 times the max. operating pressure
环境及流体温度	Ambient & Fluid Temp.	-40 ~ 100°C
材质	Material	尼龙12 (Nylon 12)

特性 Features


- 表面光洁, 使用寿命长
- 具有很好的耐高压、耐腐蚀、耐热性
- 柔韧, 易弯曲, 便于安装
- Finished surface and long service life.
- Resistant to high pressure, high temperature and corrosion.
- Flexible, easy fitting.

型号 Model

型号 Model	KNY12-0425	KNY12-0604	KNY12-0806	KNY12-1008	KNY12-1209	KNY12-1613
管外径 O.D. (mm)	4	6	8	10	12	16
管内径 I.D. (mm)	2.5	4	6	8	9	13
最小弯曲半径 Minimum bending radius (mm)	20	40	50	65	70	130

注: 标准颜色: 黑色、白色 Standard color: black, white
每卷管子长度: 100米、200米 Length per roll: 100m, 200m.

最大操作压力曲线
Maximum operating pressure curve

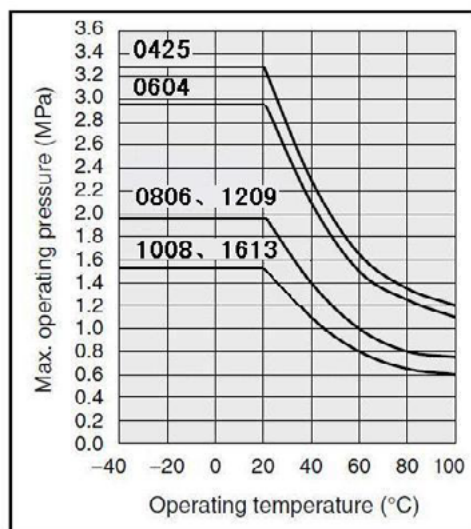

型号表示方法 How To Order

KNY12-1008	B	-	100
管子型号 Tubing model	颜色 Color B 黑色 Black W 白色 White		每卷管子长度 Length per roll 100 100m 200 200m