

ARK 压力开关 Pressure Switch Series KSNS






特性 Features

- 可使用在气压和液压冷冻、冷却装置。
(流体温度-10℃~120℃)
Can be used in refrigerating installations,
(Fluid temperature:-10℃~120℃).
- 供应标准安装板。
Standard mounting bracket supplied.

电气特性 Electrical Specifications


额定电压 Rated Voltage(V)	(COS ϕ)	125/250V AC
额定电流 Rated Current (A)	1	12
感应电流 Inductive Current (A)	0.75	12
	0.45	72

外形尺寸图 Dimensions (mm)

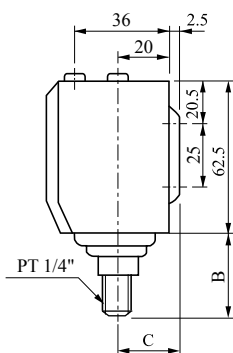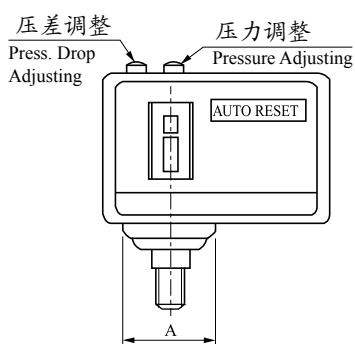

触点形式


Contact Form



1	公共点 Common Terminal
3	压力上升接点 Close on pressure increase
5	压力下降接点 Close on pressure decrease

标准安装板

Standard Mounting Bracket



型号 Model	压力调整范围 Press. Range (MPa)		压差调整范围 Press. Drop (MPa)		初始设定值 (MPa) Factory Settings		耐压力 MPa (Proof Press.)	质量 Wt.	A	B	C
	最低 Min.	最高 Max.	最低 Min.	最高 Max.	OFF(ON)	ON(OFF)					
KSNS	C103	-0.07	0.3	0.04	0.2	0.15	0.3	1.7	38.5	38.9	22.4
	C106	-0.07	0.6	0.06	0.4	0.3	0.2	1.7	34.4	36	22.4
	C110	0.1	1.0	0.1	0.3	0.6	0.5	1.7	34.4	36	22.4
	C120	0.5	2.0	0.2	0.4	1.2	1.05	3.3	22	32.7	18.5
	C130	0.5	3.0	0.5	1.0	2.0	1.5	3.3			

注：如选择英制接头螺纹(7/16~20UNF)在型号后加注：-N