


ARK 5通先导型电磁阀
5-Port Pilot Operated
Solenoid Valve
Series KSY3000



KSY 3120-□ LZ




规格 Specifications

型号	Model	KSY3120	KSY3220	KSY3320	KSY3420	KSY3520
接管口径	Port Size	M5				
使用流体	Fluid	洁净空气 Clean Air				
工作压力范围	Operating Pressure Range (MPa)	0.2~0.7		0.25~0.7		
有效截面积	Effective Sectional Area (mm²)	2.3		1.8		
环境及流体温度	Ambient & Fluid Temp.	5~60°C				
响应时间	Response Time(5bar)	≤20ms		≤30ms		
最大操作频率	Max.Working Frequency	10c/sec		8c/sec		
润滑*	Lubrication	不需要 Not Required				
手动方式	Manual Override	无锁定按钮式(标准) Push Button (Standard) 旋转锁定式(可选) Lever Lock (Option)				
频率/标准电压	Frequency/Rated Voltage	DC12V, DC24V				
容许电压波动范围	Permissible Voltage Variation	标准电压的±10% ±10% of Rated Voltage				
绝缘种类	Coil Insulation Class	F级或相同等级 Class F or Equivalent				
功率消耗	Power Consumption	DC	0.65W			

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.


型号表示方法 How To Order

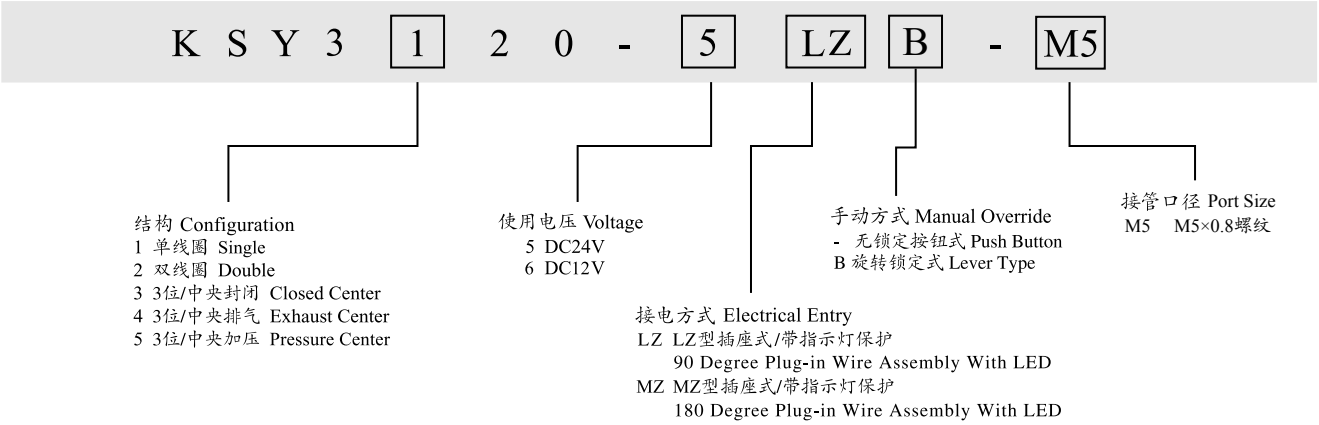


5通先导型电磁阀 5-Port Pilot Operated Solenoid Valve
Series KSY3000
外形尺寸图 Dimensions (mm)

LZ型插座式 (LZ Plug Connector Type)

KSY3120- □ LZ - M5

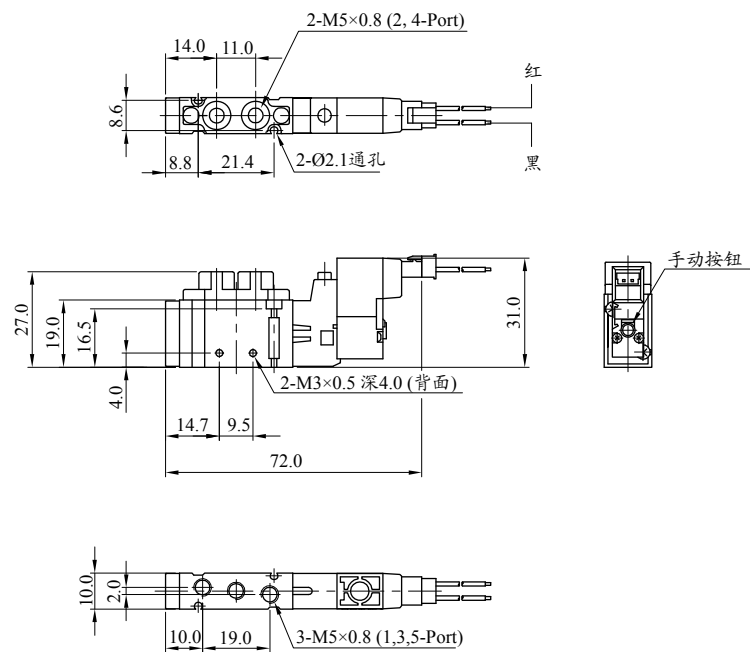


KSY3220- □ LZ - M5

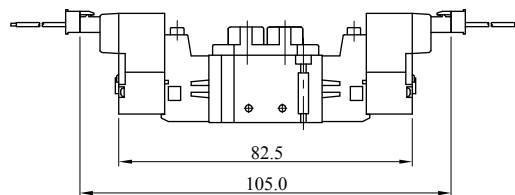

MZ型插座 (MZ Plug Connector Type)


KSY3320- □ MZ - M5

4
5

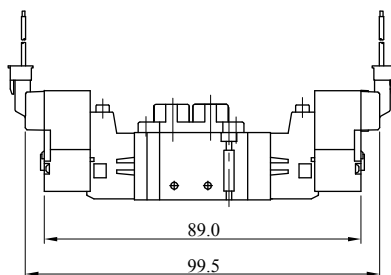

汇流板 Manifold

Series KSY3000





规格 Manifold Specifications

型号	Model	KSY3000
接管口径	Port Size	G1/8"
使用流体	Fluid	洁净空气 Clean Air
工作压力范围	Operating Pressure Range (MPa)	0.25~0.7
位置数	Stations	2~10

汇流板外形尺寸图 Manifold Dimensions (mm)

LZ 插座式

LZ Connector Type

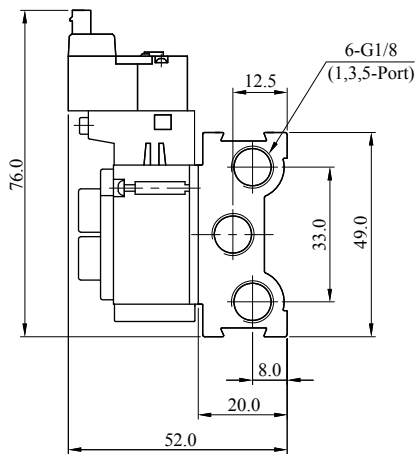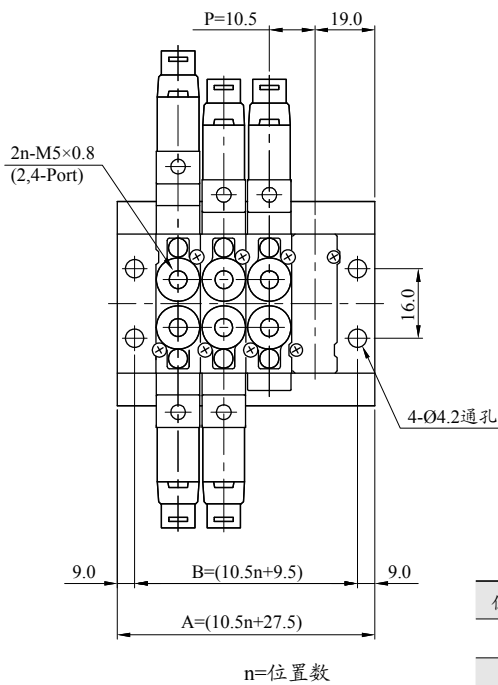

位置数	2	4	6	8	10
B	30.5	51.5	72.5	93.5	114.5
A	48.5	69.5	90.5	111.5	132.5

型号表示方法 How to Order

KSY

3000

-

20

-

M5

-

B2

适用电磁阀

Applicable Solenoid Valve

Series KSY3000

汇流板位置数

No. of Stations

M2	2
M4	4
...	...
M10	10

盲板数量

No. of Blank Plates

-	无 None
B1	1
B2	2
B3	3
...	...