


5通先导型电磁阀
5-Port Pilot Operated
Solenoid Valve
Series KVF5000



KVF 5120-□G



KVF 5120-□D




KVF 5220-□DZ

规格 Specifications

型号	Model	KVF5120	KVF5220	KVF5320	KVF5420	KVF5520
		KVF5120LT	KVF5220LT	KVF5320LT	KVF5420LT	KVF5520LT
接管口径	Port Size	PT3/8"				
使用流体	Fluid	洁净空气 Clean Air				
工作压力范围	Operating Pressure Range (MPa)	0.15~1.0		0.2~1.0		
有效截面积	Effective Sectional Area (mm²)	36.0		30.0		
环境及流体温度	Ambient & Fluid Temp.	5~60℃ (标准型); -15~60℃ (耐低温型)				
响应时间	Response Time(5bar)	≤30ms		≤40ms		
最大操作频率	Max.Working Frequency	5c/sec		3c/sec		
润滑*	Lubrication	不需要 Not Required				
手动方式	Manual Override	无锁定按钮式(标准) Push Button (Standard) 旋转锁定式(可选) Lever Lock (Option)				
频率/标准电压	Frequency/Rated Voltage	AC110, AC220 (50/60Hz) / DC12V, DC24V				
容许电压波动范围	Permissible Voltage Variation	标准电压的±10% ±10% of Rated Voltage				
绝缘种类	Coil Insulation Class	F级或相同等级 Class F or Equivalent				
功率消耗	Power Consumption	AC	持续 Holding 5.5VA (50/60Hz)			
		DC	2.5W			

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary


型号表示方法 How To Order

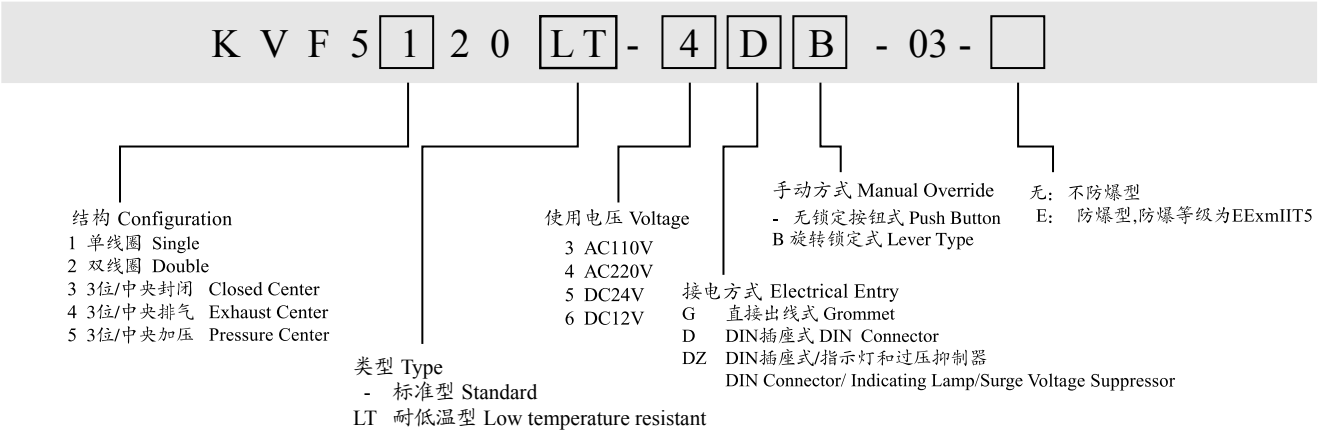


5通先导型电磁阀 5-Port Pilot Operated Solenoid Valve
Series KVF5000
外形尺寸图 Dimensions (mm)

直接出线式 (Grommet Type)

KVF5120(LT)-□G-03

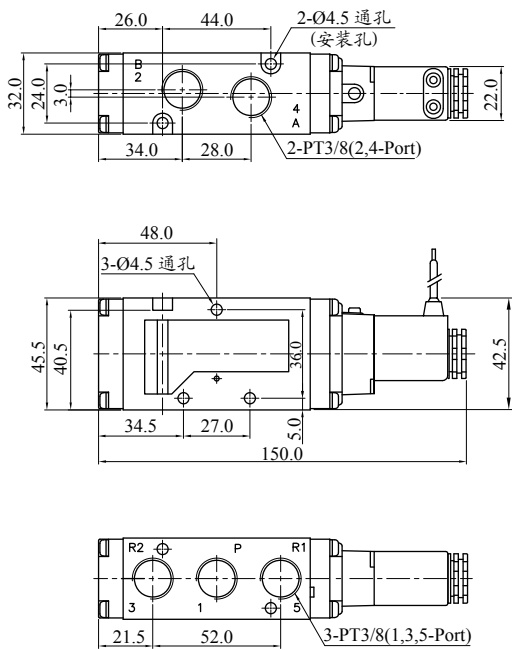


KVF5220(LT)-□G-03

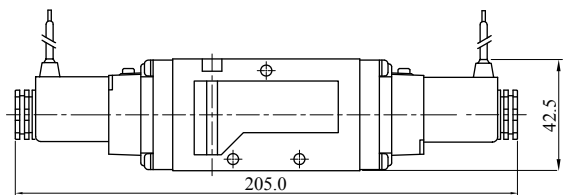

KVF5320(LT)-□G-03

4


5

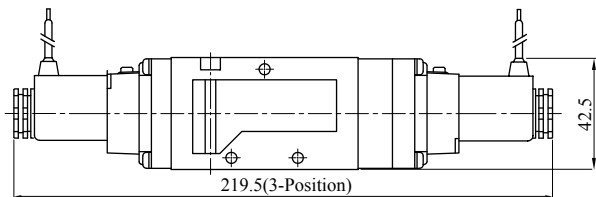


5通先导型电磁阀 5-Port Pilot Operated Solenoid Valve Series KVF5000 外形尺寸图 Dimensions (mm)

DIN型插座式 (DIN Connector Type)


KVF 5120-□D-03

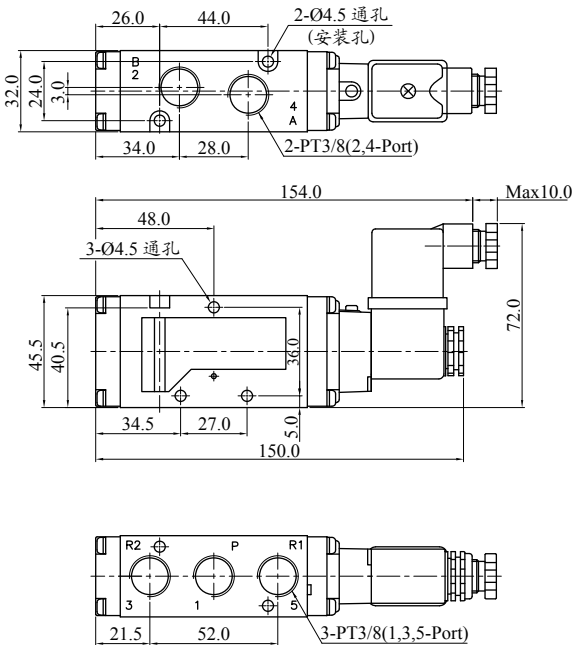

KVF 5220-□D-03

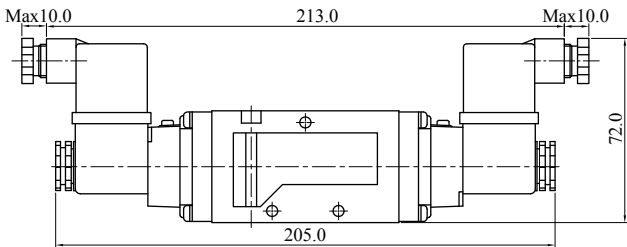

KVF 5320- □ D -03
4
5

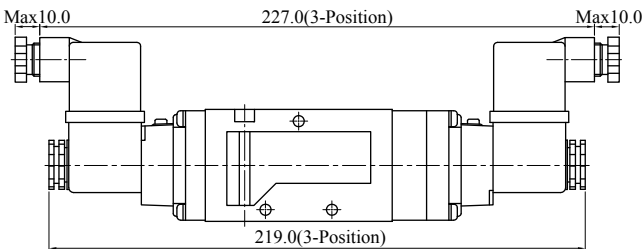

######